

ENGINEERING PHYSICS

(For END SEM Exam)

H. J. Sawant

M.Sc. (Physics) M.Tech. (Atmospheric Physics),
Formerly Lecturer, Vishwakarma Institute of Technology,
Pune.

S. V. Arlikar

M.Sc. (Physics) with Specialization in Electronics
Assistant Professor in Physics
All India Shri Shivaji Memorial Society's
Institute of Information Technology, Pune.

Dr. S. K. Babar

M.Sc. Ph.D (Physics), Associate Professor in Physics,
D.Y. Patil College of Engineering, Akurdi, Pune.

V. P. Waghe

B.Sc. (Physics) M.Sc. (Physics)
Assistant Professor in Engineering Physics,
Amrutvahini College of Engineering, Amrutnagar, Sangamner.

S. N. Shukla

M.Sc. (Electronics), FE Head of Dept.
Matoshri College of Engineering
& Research Centre, Nashik.

S. S. Joshi

M.Sc. (Physics) M.Phil. (Physics), Associate Professor
K.K. Wagh Institute of Engineering Education & Research,
Nashik.



A Guide For Engineering Students



A Guide For Engineering Students

ENGINEERING PHYSICS

(For END SEM Exam)

SUBJECT CODE : 107002

F.E. [Common to All Branches] Semester - I/II

© Copyright with Technical Publications

All publishing rights (printed and ebook version) reserved with Technical Publications.

No part of this book should be reproduced in any form, Electronic, Mechanical, Photocopy or any information storage and retrieval system without prior permission in writing, from Technical Publications, Pune.

Published by :



Amit Residency, Office No.1, 412, Shaniwar Peth,
Pune - 411030, M.S. INDIA Ph.: +91-020-24495496/97
Email : sales@technicalpublications.org
Website : www.technicalpublications.org

Printer :

Yogiraj Printers & Binders, Sr.No. 10/1A, Ghule Industrial Estate, Nanded Village Road,
Tal. - Haveli, Dist. - Pune - 411041.

First Edition : 2019

Second Edition : 2020

Price : ₹ 95/-

ISBN 978-93-89420-65-4



9 789389 420654

SPPU 19

SYLLABUS

ENGINEERING PHYSICS - [107002]

Credits	Examination Scheme :
05	End-Semester : 70 Marks
	PR : 25 Marks

Unit III Quantum Mechanics

De-Broglie hypothesis - Concept of phase velocity and group velocity (qualitative) - Heisenberg Uncertainty Principle - Wave-function and its physical significance - Schrodinger's equations : time independent and time dependent - Application of Schrodinger's time independent wave equation - Particle enclosed in infinitely deep potential well (Particle in Rigid Box) - Particle in Finite potential well (Particle in Non Rigid box) (qualitative) - Tunneling effect, Tunneling effect examples (principle only) : Alpha Decay, Scanning Tunneling Microscope, Tunnel diode - Introduction to quantum computing. (Chapter-6)

Unit IV Semiconductor Physics

Free electron theory (Qualitative) - Opening of band gap due to internal electron diffraction due to lattice Band theory of solids - Effective mass of electron density of states - Fermi Dirac distribution function - Conductivity of conductors and semiconductors - Position of Fermi level in intrinsic and extrinsic semiconductors (with derivations based on carrier concentration) - Working of PN junction on the basis of band diagram - Expression for barrier potential (derivation) - Ideal diode equation - Applications of PN junction diode : Solar cell (basic principle with band diagram) IV Characteristics and Parameters, ways of improving efficiency of solar cell - Hall effect : Derivation for hall voltage, hall coefficient, applications of hall effect. (Chapter-7)

Unit V Magnetism and Superconductivity

Magnetism

Origin of magnetism - Classification of magnetism on the basis of permeability (qualitative) - Applications of magnetic devices : transformer cores, magnetic storage, magneto-optical recording.

Superconductivity

Introduction to superconductivity, Properties of superconductors : zero electrical - resistance, critical magnetic field, persistent current, Meissner effect - Type I and Type II superconductors - Low and high temperature superconductors (introduction and qualitative) - AC/DC Josephson effect, SQUID : basic construction and principle of working, Applications of SQUID - Applications of superconductors. (Chapters-8, 9)

Unit VI Non Destructive Testing and Nanotechnology

Non Destructive Testing

Classification of non-destructive testing methods - Principles of physics in non-destructive testing - Advantages of non-destructive testing methods - Acoustic emission testing - Ultrasonic (thickness measurement, flaw detection) - Radiography testing.

Nanotechnology

Introduction to nanotechnology - Quantum confinement and surface to volume ratio - Properties of nanoparticles : optical, electrical, mechanical - Applications of nanoparticles : Medical (targeted drug delivery), electronics, space and defense, automobile. (Chapters-10, 11)

TABLE OF CONTENTS

Unit - III

Chapter - 6 Quantum Mechanics (6 - 1) to (6 - 54)

6.1	de Broglie Hypothesis	6 - 1
6.2	Phase Velocity and Group Velocity	6 - 14
6.3	Properties of Matter Waves	6 - 17
6.4	Heisenberg's Uncertainty Principle	6 - 19
6.5	Wave Function and its Physical Significance	6 - 25
6.6	Schrödinger's Time Independent Wave Equation	6 - 28
6.7	Schrödinger's Time Dependent Wave Equation	6 - 30
6.8	Particle in a Rigid Box (Infinite Potential Well)	6 - 31
6.9	Particle in a Non-Rigid Box (Finite Potential Well)	6 - 45
6.10	Tunnel Diode	6 - 49
6.11	Scanning Tunneling Microscope	6 - 52
6.12	Quantum Computing	6 - 54

Unit - IV

Chapter - 7 Semiconductor Physics (7 - 1) to (7 - 52)

7.1	Free Electron Theory	7 - 1
7.2	Kronig-Penney Model	7 - 3
7.3	Band Theory of Solids	7 - 6
7.4	Effective Mass of an Electron	7 - 10
7.5	Density of States	7 - 13
7.6	Fermi-Function and Fermi-Level	7 - 16
7.7	Conductivity of Conductor	7 - 22
7.8	Conductivity in a Semiconductor	7 - 24
7.9	Fermi-Level in Semiconductors	7 - 32
7.10	p-n Junction Diode	7 - 38

7.11	Solar Cell	7 - 43
7.12	Hall Effect	7 - 46

Unit - V

Chapter - 8 Magnetism (8 - 1) to (8 - 12)

8.1	Origin of Magnetism	8 - 1
8.2	Types of Magnetic Materials	8 - 3
8.3	Applications of Magnetic Devices	8 - 7

Chapter - 9 Superconductivity (9 - 1) to (9 - 16)

9.1	Properties of Superconductors	9 - 1
9.2	BCS Theory	9 - 9
9.3	Types of Superconductors	9 - 10
9.4	High Temperature Superconductors	9 - 13
9.5	Josephson Effect	9 - 14
9.6	Applications of Superconductors	9 - 15

Unit - VI

Chapter - 10 Non-Destructive Testing (10 - 1) to (10 - 9)

10.1	Testing Methods	10 - 1
10.2	Types of Defects	10 - 1
10.3	Objectives of Non-Destructive Testing	10 - 2
10.4	Methods of Non-Destructive Testing	10 - 2
10.5	Acoustic Emission Testing	10 - 3
10.6	X-ray Radiography	10 - 4
10.7	Ultrasonic Inspection Method	10 - 6

Chapter - 11 Nanotechnology (11 - 1) to (11 - 11)

11.1	Nano-particles	11 - 1
11.2	Quantum Confinement	11 - 2

11.3	Surface to Volume Ratio	11 - 4
11.4	Properties of Nanoparticles	11 - 4
11.5	Applications of Nanoparticles	11 - 8

Solved Sample Question Papers (End Sem)

(SE - 1) to (SE - 15)

Sample Question Paper - 1 (End Sem).	(SE - 1) to (SE - 4)
Sample Question Paper - 2 (End Sem).	(SE - 4) to (SE - 7)
Sample Question Paper - 3 (End Sem).	(SE - 7) to (SE - 9)
Sample Question Paper - 4 (End Sem).	(SE - 10) to (SE - 12)
Sample Question Paper - 5 (End Sem)	(SE - 12) to (SE - 15)

MARKING SCHEME


EXAMINATION SCHEME & QUESTION PAPER PATTERN

End Sem Exam


Q.1 or Q.2	Unit - III	18 Marks	$2\frac{1}{2}$ Hour 70 Marks
Q.3 or Q.4	Unit - IV	17 Marks	
Q.5 or Q.6	Unit - V	18 Marks	
Q.7 or Q.8	Unit - VI	17 Marks	

MIND MAPS


Mind Map - Chapter 6 : Quantum Mechanics

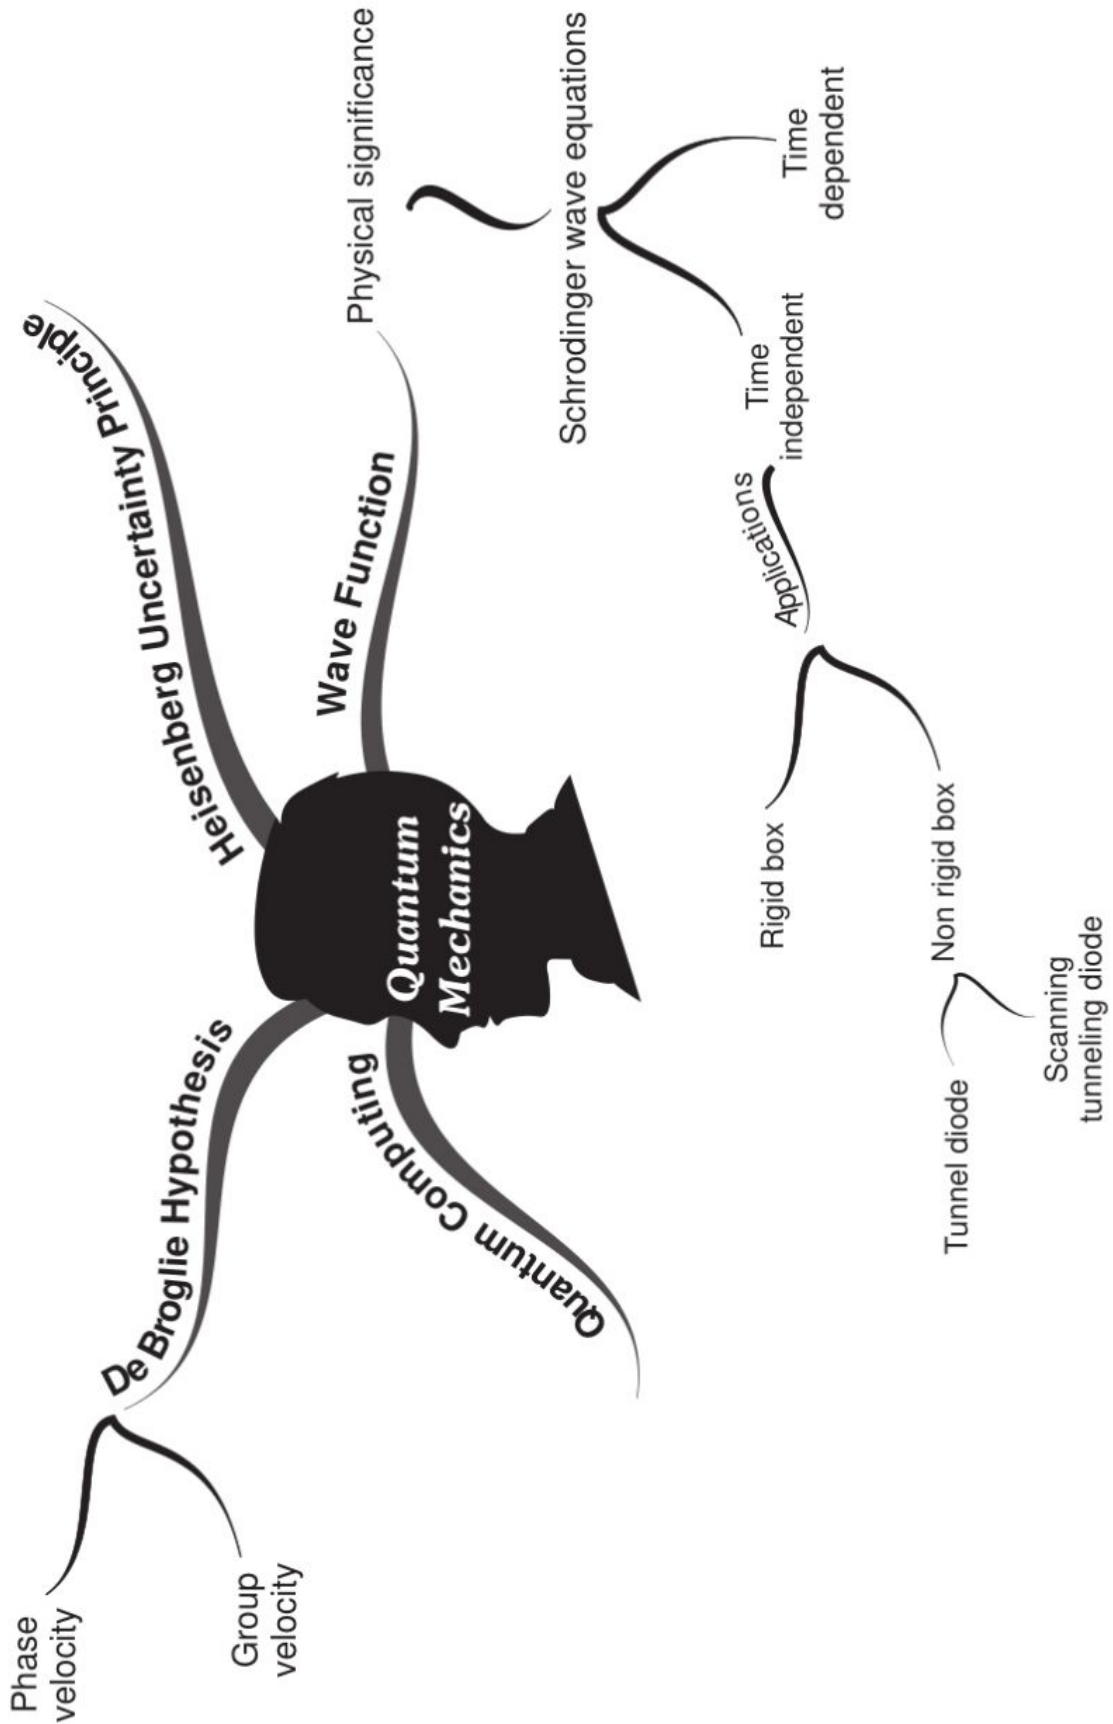


Mind Map - Chapter 7 : Semiconductor physics

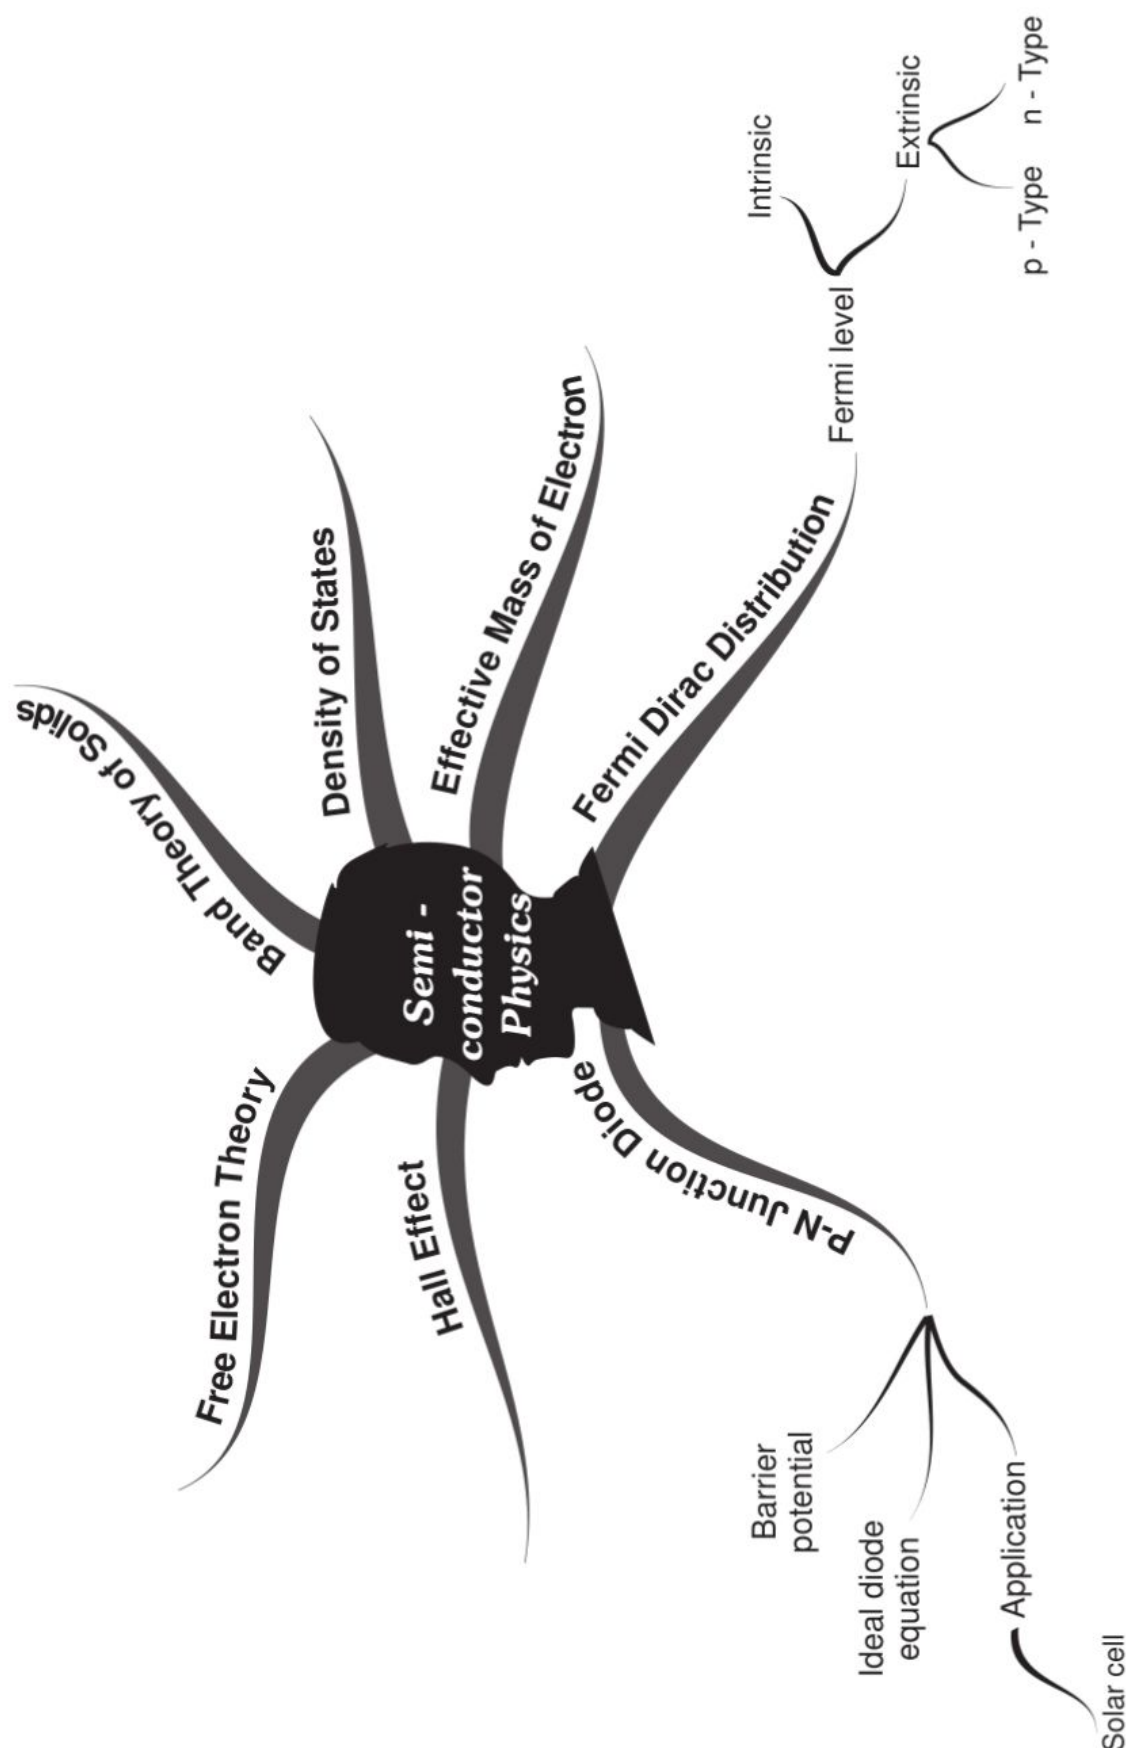


Mind Map - Chapter 8 : Magnetism

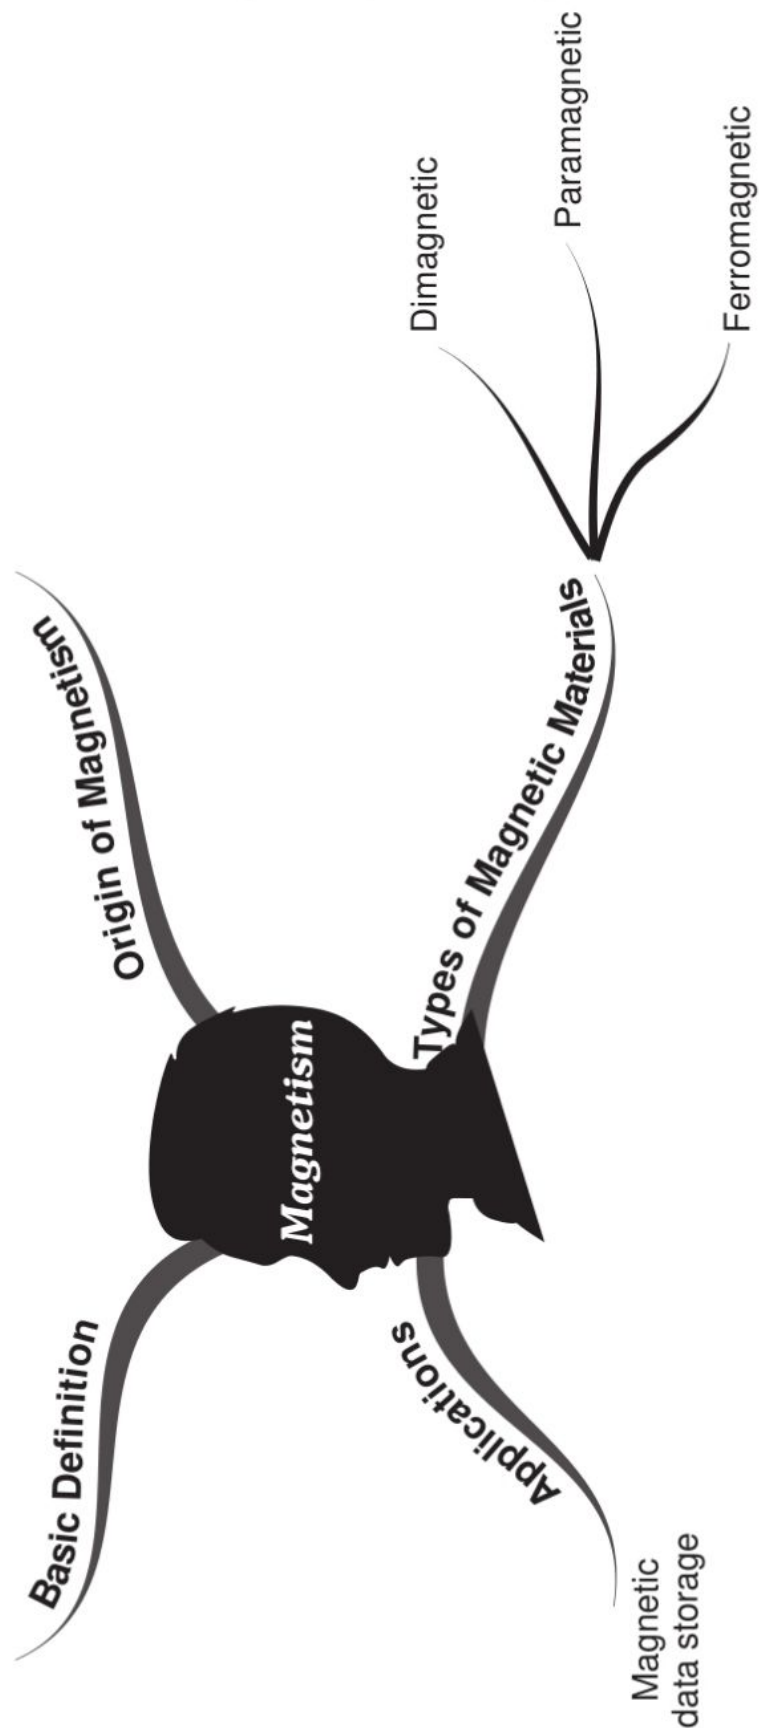


Mind Map - Chapter 9 : Superconductivity

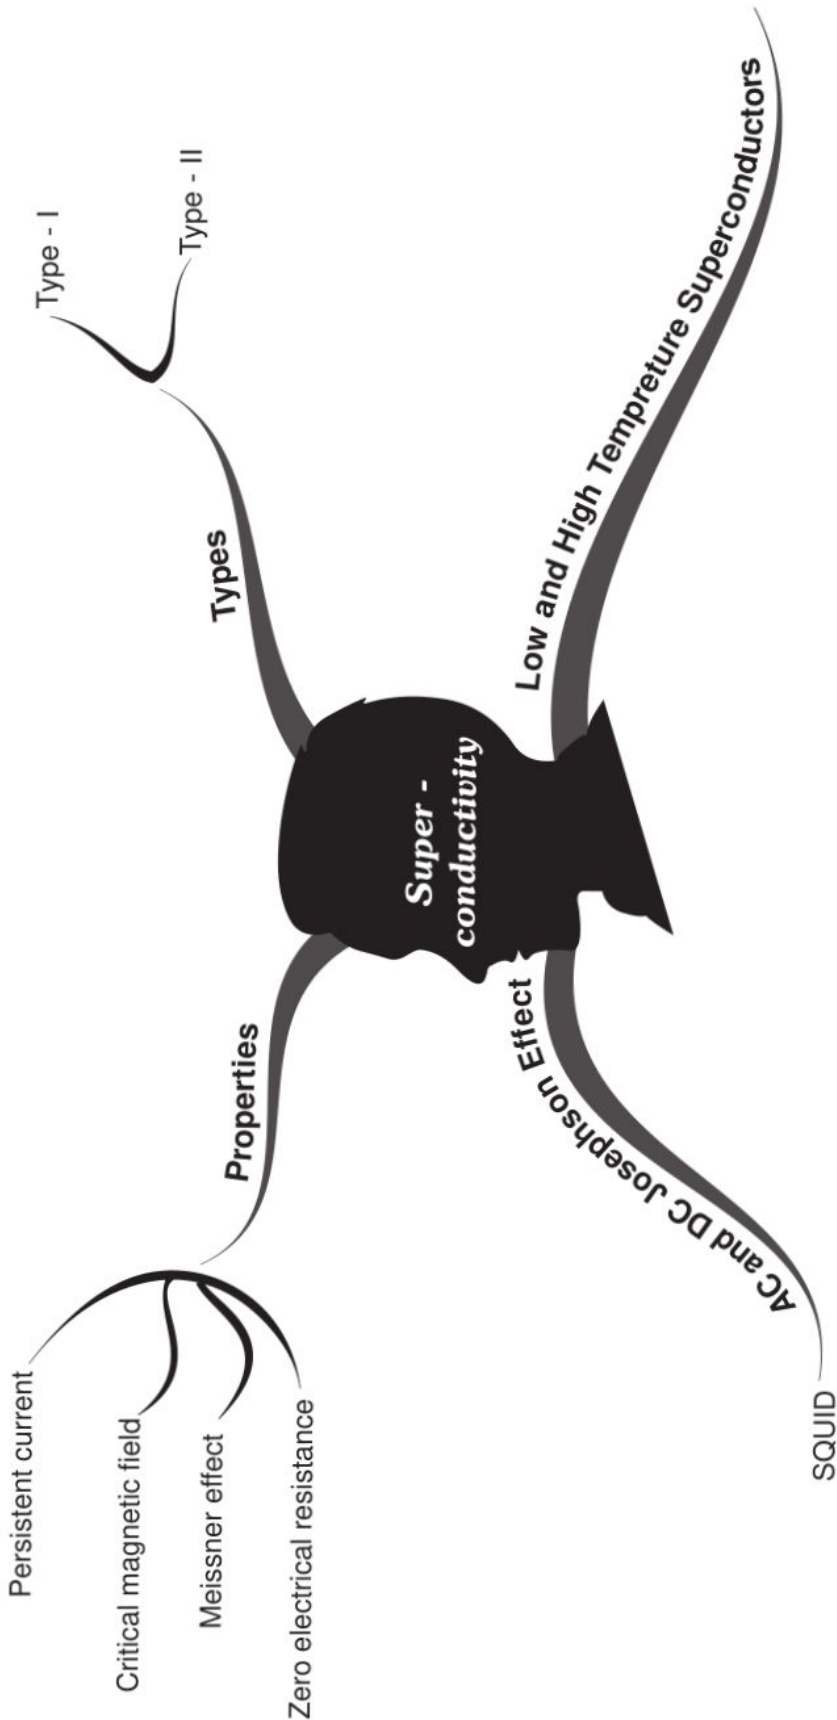

Mind Map - Chapter 10 : Non Destructive Testing

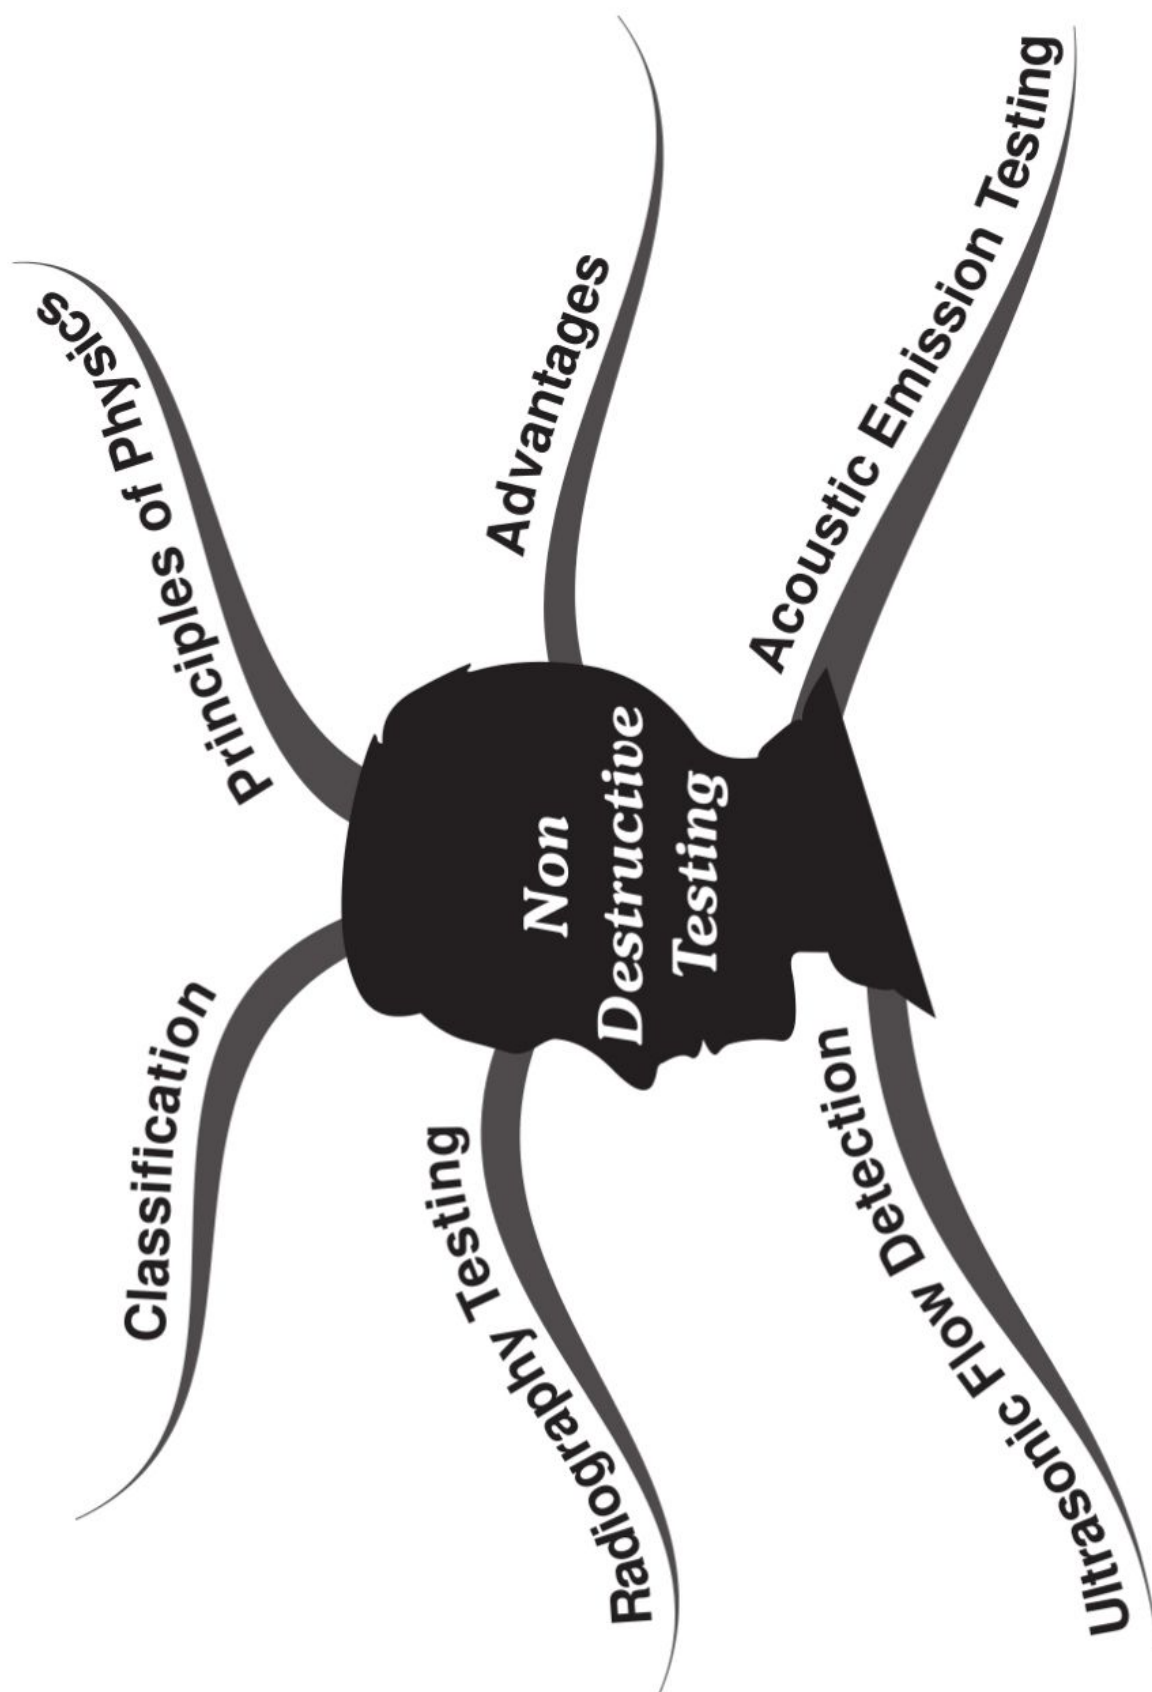

Mind Map - Chapter 11 : Nanotechnology

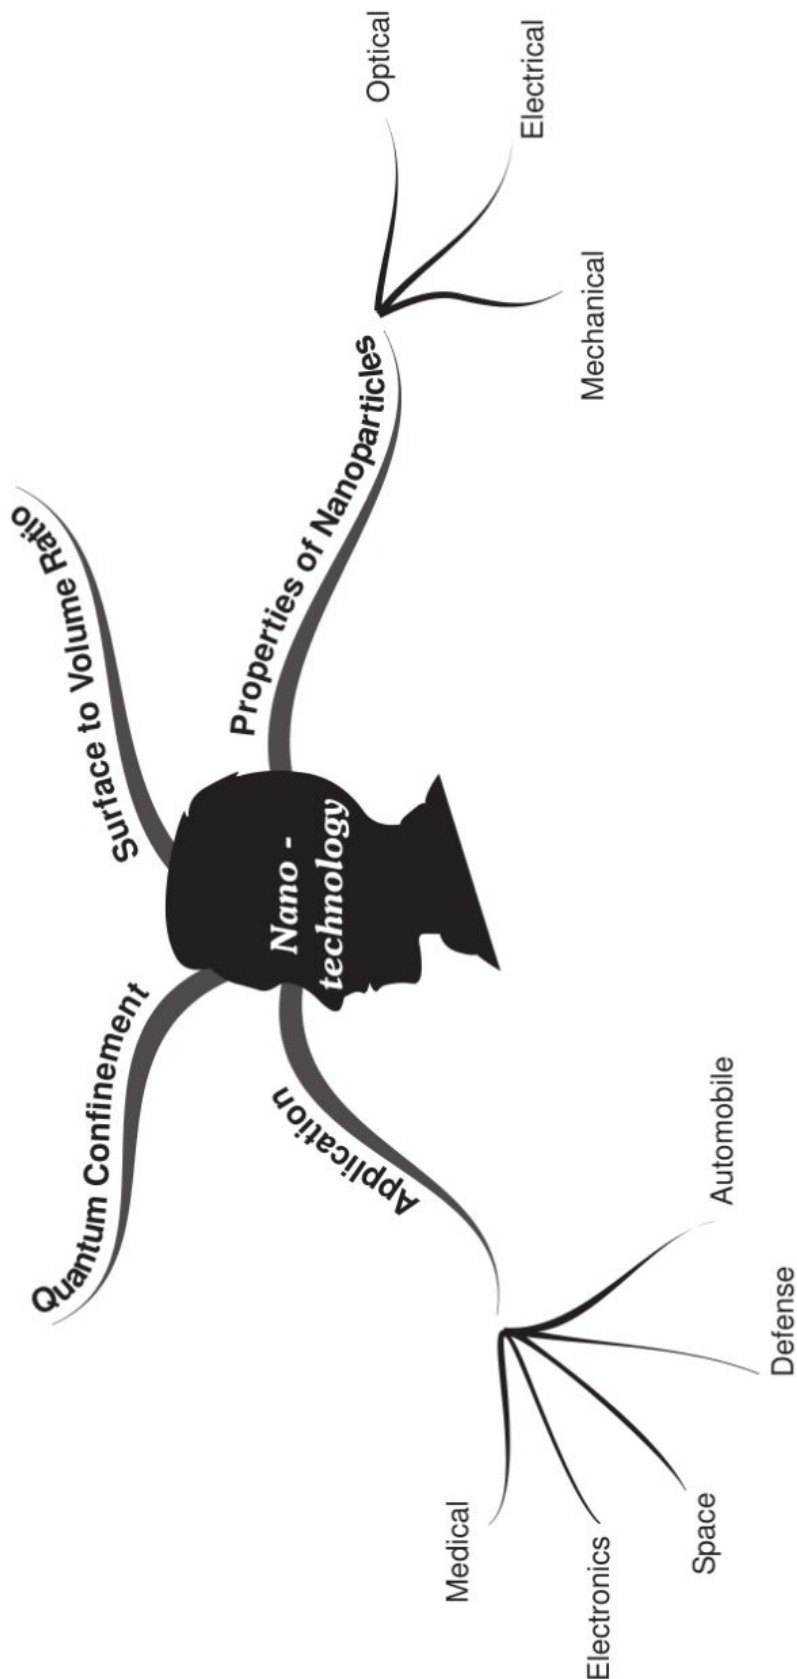END... 

FORMULAE AT A GLANCE

Unit - III

Chapter 6 - Quantum Mechanics

de Broglie hypothesis

$$1) \quad \lambda = \frac{h}{mv}$$

$$2) \quad \lambda = \frac{h}{\sqrt{2mE}}$$

$$3) \quad \lambda = \frac{h}{\sqrt{2meV}}$$

Heisenberg's Uncertainty principle

$$1) \quad \Delta x \Delta p = h$$

$$2) \quad \Delta E \Delta t = h$$

Particle in rigid box

$$E_n = \frac{n^2 h^2}{8mL^2}$$

Unit - IV

Chapter 7 - Semiconductor Physics

Fermi-Dirac probability distribution function

$$P(E) = \frac{1}{1 + e^{(E-E_F)/kT}}$$

Conductivity of conductors

$$1) \quad R = \rho \frac{l}{a}$$

$$2) \quad \mu = \frac{v_d}{E}$$

$$3) \quad \sigma = n e \mu$$

$$4) \quad I = n e a v_d$$

Conductivity in semiconductors

$$\sigma = e(n_e \mu_e + n_h \mu_h)$$

For intrinsic semiconductor

$$\sigma = n_i e (\mu_e + \mu_h)$$

For n-type semiconductor

$$\sigma \approx n_e e \mu_e$$

For p-type semiconductor

$$\sigma \approx n_h e \mu_h$$

Barrier potential in diodes

$$E_b = KT \ln \left(\frac{N_D N_A}{n_i^2} \right)$$

Ideal diode equation

$$I = I_0 \left(e^{V/\eta V_T} - 1 \right)$$

where, I_0 is the reverse saturation current,

$$V_T = \frac{T}{11,600} \text{ is known as volt equivalent of}$$

temperature,

$$T = \text{Absolute temperature}$$

η is a constant which is 1 for germanium and approximately 2 for silicon.

Hall effect

$$1) \quad V_H = \frac{I B d}{n q a} = \frac{I B}{n q w}$$

$$2) \quad R_H = \frac{1}{n q}$$

$$3) \quad V_H = R_H \frac{I B d}{a}$$

Unit - V**Chapter 9 - Superconductivity**

Critical magnetic field

$$H_c = H_0 \left[1 - \left(\frac{T}{T_c} \right)^2 \right]$$

Isotope effect

$$T_c M^{1/2} = \text{Constant}$$

END... ✍

6**Quantum Mechanics****6.1 : de Broglie Hypothesis**

Q.1 State de Broglie's hypothesis and derive the equation for de Broglie's wavelength in terms of 1) Energy 2) For an electron

 [SPPU : May-12, Marks 6]

Ans. : de Broglie hypothesis : According to de Broglie's hypothesis, every moving particle is associated with a wave, called the matter wave or de Broglie wave, whose wavelength (λ) is given by,

$$\lambda = \frac{h}{p} = \frac{h}{mv}$$

where,

h = Planck's constant,

m = Mass of the particle

and

v = Particle velocity.

de Broglie Wavelength for a Free Particle in terms of its Kinetic Energy

- For a free particle the total energy is same as its kinetic energy which is given by

$$E = \frac{1}{2}mv^2$$

- Multiplying and dividing by ' m ',

$$E = \frac{m^2v^2}{2m}$$

But

$$p = mv$$

$\therefore$

$$E = \frac{p^2}{2m}$$

$$\therefore p = \sqrt{2mE}$$

By de Broglie hypothesis,

$$\lambda = \frac{h}{p}$$

$$\therefore \lambda = \frac{h}{\sqrt{2mE}}$$

de Broglie Wavelength of an Electron Accelerated through Some Potential Difference

- If an electron is accelerated through a potential difference of 'V' volts, the work done on the electron is eV which is converted into kinetic energy.

$$\therefore \frac{1}{2}mv^2 = eV$$

$$\therefore \frac{p^2}{2m} = eV$$

$$\therefore p = \sqrt{2meV}$$

- The de Broglie wavelength is given by,

$$\lambda = \frac{h}{p}$$

$$\therefore \lambda = \frac{h}{\sqrt{2meV}}$$

As $h = 6.63 \times 10^{-34} \text{ J-s,}$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

(Neglecting relativistic correction)

$$e = 1.6 \times 10^{-19} \text{ C}$$

$$\begin{aligned} \therefore \lambda &= \frac{6.63 \times 10^{-34}}{\sqrt{2 \times 9.1 \times 10^{-31} \times 1.6 \times 10^{-19} V}} \\ &= \frac{12.27 \times 10^{-10}}{\sqrt{V}} \text{ m} \end{aligned}$$

$$\therefore \lambda = \frac{12.27}{\sqrt{V}} \text{ \AA}$$

Q.2 State de Broglie's hypothesis. Hence obtain the relation for de Broglie's wave length in terms of energy.

Ans. : Refer Q.1.

Q.3 Starting from $\lambda = \frac{h}{mv}$, obtain $\lambda = \frac{h}{\sqrt{2mE}}$, where E is KE of the particle.  [SPPU : May-14, Marks 3]

Ans. : Refer Q.1.

Q.4 What is De-Broglie's hypothesis of matter waves. Show that the De-Broglie's wavelength of a charged particle is inversely proportional to the square root of the accelerating potential.

Ans. : Refer Q.1.

Q.5 What is de-Broglie hypothesis. Derive an expression for de-Broglie wavelength for an electron when it is accelerated by potential difference 'V'.

Ans. : Refer Q.1.

Q.6 State de-Broglie hypothesis of matter waves. Derive the expression for matter waves for an accelerating particle in terms of its kinetic energy.

Ans. : Refer Q.1.

Q.7 What is De-Broglie hypothesis ? Derive an expression for de-Broglie wavelength for an electron when it is accelerated by potential difference V.

Ans. : Refer Q.1.

Important Formulae

$$\lambda = \frac{h}{p} = \frac{h}{mv}$$

$$\lambda = \frac{h}{\sqrt{2mE}}$$

$$\lambda = \frac{h}{\sqrt{2meV}}$$

$$\lambda = \frac{12.27}{\sqrt{V}} \text{ \AA}$$

Q.8 Determine the velocity and kinetic energy of a neutron having de Broglie wavelength $1 \text{ \AA}$. Mass of neutron = $1.67 \times 10^{-27} \text{ kg}$.

 [SPPU : Dec.-99,09, May-04, Marks 4]

Ans. : Given data : $h = 6.63 \times 10^{-34} \text{ J-s}$

$$m = 1.67 \times 10^{-27} \text{ kg}$$

$$\lambda = 1 \text{ \AA} = 1 \times 10^{-10} \text{ m}$$

Formulae : $\lambda = \frac{h}{mv}$ and $\lambda = \frac{h}{\sqrt{2mE}}$

$$\therefore v = \frac{h}{m\lambda}$$

$$\therefore v = \frac{6.63 \times 10^{-34}}{1.67 \times 10^{-27} \times 1 \times 10^{-10}}$$

$$\therefore v = 3970 \text{ m/s}$$

$$\lambda = \frac{h}{\sqrt{2mE}}$$

$$\therefore E = \frac{h^2}{2m\lambda^2} = \frac{(6.63 \times 10^{-34})^2}{2 \times 1.67 \times 10^{-27} \times (1 \times 10^{-10})^2}$$

$$\therefore E = 1.316 \times 10^{-20} \text{ J} = \frac{1.316 \times 10^{-20}}{1.6 \times 10^{-19}} \text{ eV}$$

$$\therefore E = 8.225 \times 10^{-2} \text{ eV}$$

Q.9 Find the de Broglie wavelength of

i) An electron accelerated through a potential difference of 182 volts and

ii) 1 kg object moving with a speed of 1 m/s.

Comparing the results, explain why the wave nature of matter is not more apparent in daily observations.

 [SPPU : Dec.-01]

Ans. : Given data : $V = 182 \text{ V}$, $h = 6.63 \times 10^{-34} \text{ J-s}$, $m = 1 \text{ kg}$,

$v = 1 \text{ m/s}$.

Formulae : i) $\lambda = \frac{12.27}{\sqrt{V}} \text{ \AA}$ ii) $\lambda = \frac{h}{mv}$

$$\therefore \lambda = \frac{12.27}{\sqrt{182}}$$

$$\therefore$$

$$\lambda = 0.91 \text{ \AA}$$

$$\lambda = \frac{6.63 \times 10^{-34}}{1 \times 1} = 6.63 \times 10^{-34} \text{ m}$$

$$\therefore$$

$$\lambda = 6.63 \times 10^{-24} \text{ \AA}$$

This wavelength is too small and hence is not measurable whereas the wavelength of electron is measurable. Hence wave nature of matter is not apparent in daily observations.

Q.10 If electron had existed inside the nucleus, then its de Broglie wavelength would be roughly of the order of nuclear distance, i.e. 10^{-14} m . How much momentum corresponds to this wavelength? How much energy corresponds to this momentum? Express this energy in MeV and explain how this result proves that the electron cannot exist inside the nucleus. (The maximum nuclear binding energy is 8.8 MeV per nuclear particle.)

Given : Planck's constant = $6.63 \times 10^{-34} \text{ J-s}$.

 [SPPU : May-02]

Ans. : Given data : $h = 6.63 \times 10^{-34} \text{ J-s}$

$$\lambda = 10^{-14} \text{ m}$$

Formula : $\lambda = \frac{h}{p}$

$$\therefore p = \frac{h}{\lambda} = \frac{6.63 \times 10^{-34}}{10^{-14}}$$

$$\therefore$$

$$p = 6.63 \times 10^{-20} \text{ kg-m/s}$$

The corresponding energy is,

$$E = \frac{p^2}{2m} = \frac{(6.63 \times 10^{-20})^2}{2 \times 9.1 \times 10^{-31}}$$

$$\therefore E = 2.415 \times 10^{-9} \text{ J}$$

$$\text{As } 1 \text{ MeV} = 1.6 \times 10^{-13} \text{ J,}$$

$$E = \frac{2.415 \times 10^{-9}}{1.6 \times 10^{-13}} \text{ MeV}$$

∴

$$E = 15093.75 \text{ MeV}$$

This energy of the electron is much larger than the 8.8 MeV energy required to keep the electron inside the nucleus. Hence, the electron cannot exist inside the nucleus.

Q.11 An electron is accelerated through a potential difference of 10 kV. Calculate the de Broglie wavelength and momentum of electron.

☞ [SPPU : Dec.-04]

Ans. : Given data : $V = 10 \text{ kV} = 10 \times 10^3 \text{ V}$

$$\text{Formula : } \lambda = \frac{12.27}{\sqrt{V}} \text{ \AA} \quad \text{and} \quad p = \frac{h}{\lambda}$$

$$\lambda = \frac{12.27}{\sqrt{10 \times 10^3}}$$

∴

$$\lambda = 0.1227 \text{ \AA}$$

$$p = \frac{6.63 \times 10^{-34}}{0.1227 \times 10^{-10}}$$

∴

$$p = 5.403 \times 10^{-23} \text{ kg-m/s}$$

Q.12 A proton and an α -particle are accelerated by the same potential difference. Show that the ratio of the de Broglie wavelengths associated with them is $2\sqrt{2}$. Assume the mass of α -particle to be 4 times the mass of proton.

☞ [SPPU : May-05]

Ans. : Given data : The charge of proton is ' e ' and that of an α -particle is $2e$, $m_\alpha = 4 m_p$

$$\text{Formula : } \lambda = \frac{h}{\sqrt{2meV}}$$

For proton,

$$\lambda_p = \frac{h}{\sqrt{2m_p eV}} \quad \dots (1)$$

For α -particle,

$$\lambda_\alpha = \frac{h}{\sqrt{2(4m_p)(2e)V}} \quad \dots (2)$$

From equations (1) and (2),

$$\frac{\lambda_p}{\lambda_\alpha} = \frac{h}{\sqrt{2m_p eV}} \times \frac{\sqrt{2(4m_p)(2e)V}}{h} = \sqrt{8}$$

$\therefore$

$$\boxed{\frac{\lambda_p}{\lambda_\alpha} = 2\sqrt{2}}$$

Q.13 Calculate the velocity and de Broglie wavelength of an α -particle of energy 1 keV. Given : Mass of α - particle = 6.68×10^{-27} kg.

 [SPPU : May-07]

Ans. : Given data : $h = 6.63 \times 10^{-34}$ J-s

$$m = 6.68 \times 10^{-27} \text{ kg}$$

$$E = 1 \text{ keV} = 1.6 \times 10^{-16} \text{ J}$$

Formula :

$$\lambda = \frac{h}{\sqrt{2mE}}, \quad \lambda = \frac{h}{mv}$$

$$\therefore \lambda = \frac{6.63 \times 10^{-34}}{\sqrt{2 \times 6.68 \times 10^{-27} \times 1.6 \times 10^{-16}}}$$

$$\therefore \lambda = 4.535 \times 10^{-13} \text{ m}$$

$$\therefore \boxed{\lambda = 4.535 \times 10^{-3} \text{ \AA}}$$

$$\lambda = \frac{h}{mv}$$

$$\therefore v = \frac{h}{m\lambda} = \frac{6.63 \times 10^{-34}}{6.68 \times 10^{-27} \times 4.535 \times 10^{-13}}$$

$$\therefore \boxed{v = 2.19 \times 10^5 \text{ m/s}}$$

Q.14 Which has a shorter wavelength - 1 eV photon or 1 eV electron ? Calculate the value and explain.

Ans.: Given data : $h = 6.63 \times 10^{-34}$ J-s

$$c = 3 \times 10^8 \text{ m/s}$$

$$E = 1 \text{ eV} = 1.6 \times 10^{-19} \text{ J}$$

Formula : The energy of photon is given by,

$$E = h\nu = \frac{hc}{\lambda}$$

For an electron with energy 'E'

$$\lambda_e = \frac{h}{\sqrt{2mE}}$$

$$\therefore \lambda_{ph} = \frac{hc}{E}$$

$$h = 6.63 \times 10^{-34} \text{ J-s}$$

$$c = 3 \times 10^8 \text{ m/s}$$

$$E = 1 \text{ eV} = 1.6 \times 10^{-19} \text{ J}$$

$$\therefore \lambda_{ph} = \frac{6.63 \times 10^{-34} \times 3 \times 10^8}{1.6 \times 10^{-19}}$$

$$= 1.2431 \times 10^{-6} \text{ m}$$

$$\therefore \lambda_{ph} = 12431 \text{ \AA}$$

For an electron with energy 'E '

$$\lambda_e = \frac{h}{\sqrt{2mE}} = \frac{6.63 \times 10^{-34}}{\sqrt{2 \times 9.1 \times 10^{-31} \times 1.6 \times 10^{-19}}}$$

$$= 1.229 \times 10^{-9} \text{ m}$$

$$\therefore \lambda_e = 12.29 \text{ \AA}$$

The wavelength of electron is shorter than the photon. This is because of the larger momentum of electron (mv or $\sqrt{2mE}$) compared to photon $\left(\frac{h\nu}{c} \text{ or } \frac{E}{c}\right)$.

Q.15 An electron has kinetic energy equal to its rest mass energy. Calculate de Broglie's wavelength associated with it.

 [SPPU : Dec.-07]

Ans.: Given data : $E = m_0 c^2$

where, $m_0 = 9.1 \times 10^{-31} \text{ kg}$

$$c = 3 \times 10^8 \text{ m/s}$$

Formula : $\lambda = \frac{h}{\sqrt{2mE}}$

$\therefore E = 9.1 \times 10^{-31} \times (3 \times 10^8)^2$

$\therefore E = 8.19 \times 10^{-14} \text{ J}$

$$\lambda = \frac{h}{\sqrt{2mE}} = \frac{6.63 \times 10^{-34}}{\sqrt{2 \times 9.1 \times 10^{-31} \times 8.19 \times 10^{-14}}}$$

$$= 1.717 \times 10^{-12} \text{ m}$$

$\therefore \lambda = 1.717 \times 10^{-2} \text{ \AA}$

Q.16 In a T.V. set, electrons are accelerated by a potential difference of 10 kV. What is the wavelength associated with these electrons ?  [SPPU : May-08, Dec.-18, Marks 3]

$m = 1.67 \times 10^{-27} \text{ kg}$

$E = 1 \text{ MeV} = 1.6 \times 10^{-13} \text{ J}$

Formula : $\lambda = \frac{h}{\sqrt{2mE}}$

$\therefore \lambda = \frac{6.63 \times 10^{-34}}{\sqrt{2 \times 1.67 \times 10^{-27} \times 1.6 \times 10^{-13}}}$

$\therefore \lambda = 2.87 \times 10^{-14} \text{ m}$

Q.17 Find the de Broglie wavelength associated with monoenergetic electron beam having momentum 10^{-23} kg m/s .  [SPPU : May-09]

Ans. : Given data : $h = 6.63 \times 10^{-34} \text{ J-s}$

$p = 10^{-23} \text{ kg-m/s}$

Formula : $\lambda = \frac{h}{p} = \frac{6.63 \times 10^{-34}}{10^{-23}}$

$\therefore \lambda = 6.63 \times 10^{-11} \text{ m}$

$\therefore \lambda = 0.663 \text{ \AA}$

Q.18 Calculate de Broglie wavelength of 10 keV protons in $\text{\AA}$.  [SPPU : May-10,11, Dec.-17, Marks 3]

Ans. : Given data : $h = 6.63 \times 10^{-34}$ J-s.

$$m = 1.67 \times 10^{-27} \text{ kg}$$

$$E = 10 \text{ keV} = 10 \times 1.6 \times 10^{-16} \text{ J}$$

$$\therefore E = 1.6 \times 10^{-15} \text{ J}$$

Formula :
$$\lambda = \frac{h}{\sqrt{2mE}}$$

$$\therefore E = 1.6 \times 10^{-15} \text{ J}$$

$$\begin{aligned} \therefore \lambda &= \frac{6.63 \times 10^{-34}}{\sqrt{2 \times 1.67 \times 10^{-27} \times 1.6 \times 10^{-15}}} \\ &= 2.868 \times 10^{-13} \end{aligned}$$

$$\therefore \lambda = 2.868 \times 10^{-3} \text{ \AA}$$

Q.19 At what kinetic energy an electron will have a wavelength of 5000 \AA ?

 [SPPU : Dec.-10]

Ans. : Given data : $\lambda = 5000 \text{ \AA} = 5000 \times 10^{-10} \text{ m}$

Formula :
$$\lambda = \frac{h}{\sqrt{2mE}}$$

$$\begin{aligned} \therefore E &= \frac{h^2}{2m\lambda^2} = \frac{(6.63 \times 10^{-34})^2}{2(9.1 \times 10^{-31})(5000 \times 10^{-10})^2} \\ &= 9.66 \times 10^{-25} \text{ J} = \frac{9.66 \times 10^{-25}}{1.6 \times 10^{-19}} \text{ eV} \end{aligned}$$

$$\therefore E = 6.038 \times 10^{-6} \text{ eV}$$

Q.20 Calculate the de Broglie wavelength associated with 1 MeV proton ($m_p = 1.67 \times 10^{-27} \text{ kg}$).

 [SPPU : May-13, Marks 3]

Ans.: Given data : $h = 6.63 \times 10^{-34} \text{ Js}$

$$m = 1.67 \times 10^{-27} \text{ kg}$$

$$E = 1 \text{ MeV} = 1.6 \times 10^{-13} \text{ J}$$

Formula :
$$\lambda = \frac{h}{\sqrt{2mE}}$$

$$\therefore \lambda = \frac{6.63 \times 10^{-34}}{\sqrt{2 \times 1.67 \times 10^{-27} \times 1.6 \times 10^{-13}}}$$

$$\therefore \lambda = 2.87 \times 10^{-14} \text{ m}$$

Q.21 What accelerating potential would be required for a proton with zero initial velocity to acquire a velocity corresponding to its de Broglie wavelength of 10^{-10} m. [Given : $m = 1.67 \times 10^{-27}$ kg]

📖 [SPPU : May-14, Marks 3]

Ans. : Given data : $\lambda = 10^{-10}$ m , $m = 1.67 \times 10^{-27}$ kg
 $h = 6.63 \times 10^{-34}$ Js, $e = 1.6 \times 10^{-19}$ C

Formula : $\lambda = \frac{h}{\sqrt{2 meV}}$

$$\therefore V = \frac{h^2}{2 me \lambda^2}$$

$$= \frac{(6.63 \times 10^{-34})^2}{2 \times 1.67 \times 10^{-27} \times 1.6 \times 10^{-19} \times (10^{-10})^2}$$

$$\therefore V = 0.08225 \text{ V}$$

Q.22 Calculate the de Broglie wavelength of electron having kinetic energy 1 keV.

📖 [SPPU : Dec - 14, 15, Marks 3]

Ans. : Given data : $h = 6.63 \times 10^{-34}$ J s, $m = 9.1 \times 10^{-31}$ kg

$$E = 1 \text{ keV} = 1.6 \times 10^{-16} \text{ J}$$

Formula : $\lambda = \frac{h}{\sqrt{2 m E}}$

$$\therefore \lambda = \frac{6.63 \times 10^{-34}}{\sqrt{2 \times 9.1 \times 10^{-31} \times 1.6 \times 10^{-16}}}$$

$$= 3.89 \times 10^{-11} \text{ m}$$

$$\therefore \lambda = 0.39 \text{ \AA}$$

Q.23 Calculate de Broglie wavelength for a proton moving with velocity 1 percent of velocity of light.

📖 [SPPU : May-16, Marks 3]

Ans. : The de Broglie wavelength is given by

$$\lambda = \frac{h}{mV}$$

$$h = 6.63 \times 10^{-34} \text{ Js, } m = 1.673 \times 10^{-27} \text{ kg}$$

$$V = \frac{1}{100} \times 3 \times 10^8 = 3 \times 10^6 \text{ m/s}$$

$$\therefore \lambda = \frac{6.67 \times 10^{-34}}{1.673 \times 10^{-27} \times 3 \times 10^6}$$

$$\therefore \lambda = 1.32 \times 10^{-13} \text{ m}$$

Q.24 An electron beam is accelerated from rest through a potential difference of 200 V. Calculate the associated wavelength.

 [SPPU : Dec.-16, Marks 3]

Ans. : For electrons accelerated through potential difference of V volts,

$$\lambda = \frac{12.27}{\sqrt{V}} \text{ \AA}$$

$$V = 200 \text{ V}$$

$$\therefore \lambda = \frac{12.27}{\sqrt{200}}$$

$$\therefore \lambda = 0.868 \text{ \AA}$$

Q.25 Calculate the energy (in eV) with which a proton has to acquire de-Broglie wavelength of 0.1 \AA.

Ans. : By de-Broglie hypothesis,

$$\lambda = \frac{h}{\sqrt{2mE}}$$

$$\therefore E = \frac{h^2}{2m\lambda^2}$$

$$h = 6.63 \times 10^{-34} \text{ Js, } m = 1.673 \times 10^{-27} \text{ kg}$$

$$\lambda = 0.1 \text{ \AA} = 0.1 \times 10^{-10} \text{ m}$$

$$\therefore E = \frac{(6.63 \times 10^{-34})^2}{2 \times 1.673 \times 10^{-27} \times (0.1 \times 10^{-10})^2}$$

$$= 1.314 \times 10^{-18} \text{ J} = \frac{1.314 \times 10^{-18}}{1.6 \times 10^{-19}} \text{ eV}$$

$\therefore$

$$E = 8.2 \text{ eV}$$

Q.26 A proton and an alpha particle are accelerated by the same potential difference. Find the ratio of their de-Broglie wavelength. ($m_\alpha = 6.68 \times 10^{-27} \text{ kg}$, charge on alpha particle = $2 \times$ Charge on electron, $m_p = 1.673 \times 10^{-27} \text{ kg}$)

 [SPPU : May-18, Marks 3]

Ans. : Given data : The charge of proton is 'e' and that of an α -particle is $2e$, $m_\alpha = 4 m_p$

Formula : $\lambda = \frac{h}{\sqrt{2meV}}$

For proton, $\lambda_p = \frac{h}{\sqrt{2m_p eV}}$... (1)

For α -particle, $\lambda_\alpha = \frac{h}{\sqrt{2(4m_p)(2e)V}}$... (2)

From equations (1) and (2),

$$\frac{\lambda_p}{\lambda_\alpha} = \frac{h}{\sqrt{2m_p eV}} \times \frac{\sqrt{2(4m_p)(2e)V}}{h} = \sqrt{8}$$

$\therefore$

$$\frac{\lambda_p}{\lambda_\alpha} = 2\sqrt{2}$$

Q.27 An electron initially at rest is accelerated through a potential difference of 3000 V. Calculate for the electron wave the following parameters :

- The de-Broglie wavelength and
- The momentum ($h : 6.63 \times 10^{-34} \text{ Js}$)

Ans. : Given data : $V = 3000 \text{ V}$

Formula : $\lambda = \frac{12.27}{\sqrt{V}} \text{ \AA} , \lambda = \frac{h}{p}$

$\therefore \lambda = \frac{12.27}{\sqrt{3000}}$

$\therefore$

$$\lambda = 0.224 \text{ \AA}$$

$$\lambda = \frac{h}{p}$$

 $\therefore$

$$p = \frac{h}{\lambda} = \frac{6.63 \times 10^{-34}}{0.224 \times 10^{-10}}$$

 $\therefore$

$$p = 2.96 \times 10^{-23} \text{ kg-m/s}$$

6.2 : Phase Velocity and Group Velocity

Q.28 Define phase velocity and group velocity. Hence obtain the relation between v_p and v_g for de Broglie wave.

👉 [SPPU : Dec - 12, 16, Marks 6]

OR Define phase velocity, group velocity and derive their expressions.

👉 [SPPU : May - 13, Marks 4]

Ans. : • Phase velocity (also known as wave velocity) is the velocity with which a particular phase of the wave propagates in a medium.

If k = Propagation constant

and ω = Angular frequency.

The phase velocity v_p is,

$$\therefore v_p = \frac{\omega}{k} \quad \dots (1)$$

- Mathematically, a wave group can be described in terms of a superposition of individual waves of different wavelengths. The interference of these waves gives variation in amplitude defining the shape of the wave group.
- If velocities of the waves are same, the wave group travels with this same velocity. But, if the wave velocity changes with wavelength the wave group has different velocity from those of the individual waves.
- If the two waves have angular velocities differing by $d\omega$ and propagation constants differing by dk (due to difference $d\lambda$ in their wavelengths), the group velocity is given by

$$v_g = \frac{d\omega}{dk} \quad \dots(2)$$

Relation between Phase Velocity and Group Velocity

$$k = \frac{2\pi}{\lambda}$$

- From equation (1) $\omega = v_p k$

- Substituting in equation (2),

$$v_g = \frac{d}{dk}(v_p k)$$

$$\therefore v_g = v_p + k \frac{dv_p}{dk} = v_p + k \frac{dv_p}{d\lambda} \cdot \frac{d\lambda}{dk}$$

$$\therefore v_g = v_p + k \frac{dv_p}{d\lambda} \times \frac{1}{\left(\frac{dk}{d\lambda}\right)} \quad \dots (3)$$

As

$$k = \frac{2\pi}{\lambda},$$

$$\frac{dk}{d\lambda} = \frac{-2\pi}{\lambda^2}$$

- Substituting in equation (3),

$$v_g = v_p + \frac{2\pi}{\lambda} \frac{dv_p}{d\lambda} \times \frac{1}{\left(\frac{-2\pi}{\lambda^2}\right)}$$

$$\therefore v_g = v_p - \lambda \frac{dv_p}{d\lambda}$$

Q.29 Define phase velocity of a matter wave. Show that phase velocity of matter wave is greater than velocity of light.

📖 [SPPU : May - 14, 15, Dec.-15, Marks 4]

Ans. : Refer Q.28 for definition of phase velocity.

- The phase velocity v_p is,

$$v_p = \frac{\omega}{k} \quad \dots (1)$$

- For de Broglie waves,

$$\lambda = \frac{h}{mv}$$

$$\therefore k = \frac{2\pi}{\lambda} = \frac{2\pi mv}{h} \quad \dots (2)$$

- To find the frequency ν , we equate the energy ' $h\nu$ ' with relativistic total energy ' mc^2 '.

$$h\nu = mc^2$$

$$\therefore \nu = \frac{mc^2}{h}$$

As

$$\omega = 2\pi\nu$$

$\therefore$

$$\omega = \frac{2\pi mc^2}{h} \quad \dots (3)$$

- Substituting equation (2) and (3) in equation (1),

$$v_p = \frac{\left(\frac{2\pi mc^2}{h}\right)}{\left(\frac{2\pi mv}{h}\right)}$$

$$\therefore v_p = \frac{c^2}{v} \quad \dots (4)$$

- The particle velocity ' v ' is always less than the velocity of light ' c '.

$$v_p = \frac{c}{v} \cdot c$$

As $v < c, \quad \frac{c}{v} > 1$

$$\therefore v_p > c$$

i.e., velocity of de Broglie waves is always greater than the velocity of light.

Q.30 Define group velocity. Show that the group velocity of matter wave is equal to particle velocity.  [SPPU : Dec - 14, Marks 4]

Ans. : Refer Q.28 for definition of group velocity.

- The group velocity is given by

$$v_g = \frac{dw/d\nu}{dk/d\nu} \quad \dots (1)$$

- To find the frequency ν , we equate the energy ' $h\nu$ ' with relativistic total energy ' mc^2 '.

$$h\nu = mc^2$$

$$\therefore \nu = \frac{mc^2}{h}$$

As

$$\omega = 2\pi\nu$$

$$\therefore \omega = \frac{2\pi mc^2}{h}$$

$$\text{As } m = \frac{m_0}{\sqrt{1 - \frac{v^2}{c^2}}}$$

$$\omega = \frac{2\pi m_0 c^2}{\sqrt{1 - \frac{v^2}{c^2}}}$$

$$\frac{d\omega}{dv} = \frac{2\pi m_0}{h} v \left(1 - \frac{v^2}{c^2} \right)^{-3/2} \quad \dots (2)$$

- For de Broglie waves,

$$\lambda = \frac{h}{mv}$$

$$\therefore k = \frac{2\pi}{\lambda} = \frac{2\pi mv}{h}$$

$$\therefore k = \frac{2\pi m_0 v}{h \sqrt{1 - \frac{v^2}{c^2}}}$$

$$\frac{dk}{dv} = \frac{2\pi m_0}{h} \left(1 - \frac{v^2}{c^2} \right)^{-3/2} \quad \dots (3)$$

- Substituting equation (2) and (3) in equation (1),

$$v_g = v \quad \dots (4)$$

i.e., the de Broglie wave group associated with moving particle travels with the same velocity as the particle.

Q31 Define phase velocity and group velocity. Show that group velocity is equal to particle velocity.

Ans. : Refer Q.28 & Q.30

6.3 : Properties of Matter Waves

Q.32 State and explain properties of matter waves.

 [SPPU : May-11, Marks 6]

Ans. : Matter particles moving with velocity ' v ' exhibit wave nature for which the wavelength is given by,

$$\lambda = \frac{h}{mv}$$

The properties of these waves are as follows :

1. If $m = \text{Constant}$, $\lambda \propto \frac{1}{v}$ i.e., for particles having same mass, the particles moving with smaller velocities will have longer wavelengths associated with them.
2. If $v = \text{Constant}$, $\lambda \propto \frac{1}{m}$, i.e., for particles of different masses moving with the same velocities the lighter particles will have longer wavelengths associated with them.
3. For particles at rest, $v = 0$
 $\therefore \lambda = \infty$
i.e., particles at rest do not exhibit wave nature.
4. Matter waves are associated with charged as well as uncharged particles. Their velocity is not constant as in the case of electromagnetic waves. Hence they are not electromagnetic in nature. In fact, they cannot be classified into any of the types which we have encountered so far, i.e., transverse or longitudinal, electromagnetic or mechanical etc.
5. The phase velocity of matter waves is,

$$v_p = \frac{c^2}{v}$$

which is greater than ' c ', the velocity of light as the particle velocity ' v ' is always less than ' c '. Also, this velocity depends on the particle velocity ' v ' and hence, is not constant.

6. For waves in a string, the position of particles varies with time. In sound waves pressure varies with time. In electromagnetic waves the electric and magnetic fields vary with time. Similarly, the quantity whose variations constitute matter waves is called the wave function (represented by ψ). However, the wave

function ψ has no direct physical significance. The value of the wavefunction at any point in space at any time is related to the probability of finding the particle there at that time.

7. A particle is localized in space whereas wave is spread out. Hence wave nature of matter introduces uncertainty in position of the particle.
8. The wave and particle properties are not exhibited simultaneously.

Q.33 Are the matter waves electromagnetic waves ? Explain.

 [SPPU : May-13, Marks 3]

Ans. : Refer Q.32.

Q.34 State and explain de Broglie's hypothesis of matter waves. State any two properties of matter waves.

 [SPPU : Dec.-13, 17, Marks 4]

Ans. : Refer Q.32.

6.4 : Heisenberg's Uncertainty Principle

Q.35 State and explain Heisenberg's uncertainty principle.

 [SPPU : May-16, Marks 4]

Ans. : • Describing a moving particle as a wave group introduces uncertainty in the measurement of particle properties like position and momentum.

- This uncertainty is not due to any inadequacy in the measuring instruments but is inherent in wave nature.
- The position of particle becomes uncertain when it is described as a wave group. The particle may be located anywhere within the wave group but its exact location within the wave group is not known.
- Narrower the wave group, smaller is the uncertainty in its position as illustrated in Fig. Q.35.1 (a) and (b).

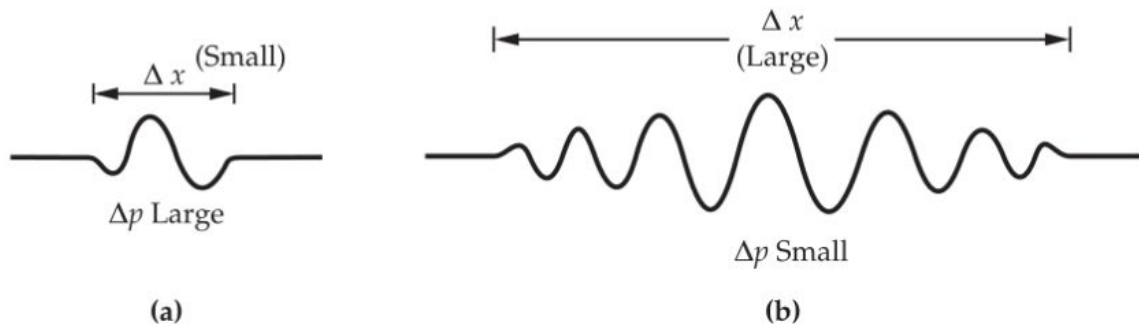


Fig. Q.35.1

- If the wave group is narrower, it consists of larger number of frequencies and hence wavelengths due to which the wavelength becomes more uncertain.
- As $\lambda = \frac{h}{p}$, an uncertainty in wavelength leads to uncertainty in momentum.
- Thus for broader wave groups, there is smaller uncertainty in wavelength and momentum, whereas for narrower wavegroups there is larger uncertainty in wavelength and momentum.
- Hence, we can conclude that for a narrow wave group there is small uncertainty in position but large uncertainty in momentum, whereas for a broader wave group there is larger uncertainty in position and smaller uncertainty in momentum.
- The Heisenberg's uncertainty principle states that it is impossible to determine both the exact position and the exact momentum of a particle at the same time. The product of uncertainties in these quantities is always greater than or equal to the Planck's constant 'h'.

$$\Delta x \Delta p_x \geq h \quad \dots (1)$$

Q.36 State and explain Heisenberg's uncertainty principle. Prove the same for pair of variables energy and time.

☞ [SPPU : May - 14, Dec.-17, 18, Marks 6]

Ans. : For statement and explanation of Heisenberg's uncertainty principle, refer Q.35.

Uncertainty Principle Applied to Energy and Time

The kinetic energy of particles can be written as

$$E = \frac{1}{2}mv^2$$

The uncertainty in energy ΔE can be obtained by differentiating the above equation.

$$\Delta E = \frac{1}{2}m \cdot 2v \Delta v = v \cdot (m\Delta v)$$

As

$$p = mv$$

$$\Delta p = m\Delta v$$

$\therefore$

$$\Delta E = v\Delta p$$

As

$$v = \frac{\Delta x}{\Delta t},$$

$$\Delta E = \frac{\Delta x}{\Delta t} \Delta p$$

$\therefore$

$$\Delta E \Delta t = \Delta x \Delta p$$

By Heisenberg's uncertainty principle,

$$\Delta x \Delta s \geq h$$

$\therefore$

$$\Delta E \Delta t \geq h \quad \dots (1)$$

Q.37 Obtain an expression for Heisenberg's uncertainty principle for energy and time.

Ans. : Refer Q.36

Important Formulae

$$\Delta x \Delta p_x \geq h$$

$$\Delta E \Delta t \geq h$$

Q.38 Compute the minimum uncertainty in the location of a 2 gm mass moving with a speed of 1.5 m/s and the minimum uncertainty in the location of an electron moving with a speed of 0.5×10^8 m/s, given that the uncertainty in the momentum is $\Delta p = 10^{-3} p$ for both.

☞ [SPPU : May-1999]

Ans. : Given data : $h = 6.63 \times 10^{-34}$ J-s

$$\Delta p = 10^{-3} p = 10^{-3} mv, \quad m = 2 \text{ gm} = 2 \times 10^{-3} \text{ kg}$$

$$v = 1.5 \text{ m/s}$$

Formula : $\Delta x \Delta p = h$

$$\therefore \Delta x = \frac{h}{\Delta p}$$

$$\therefore \Delta x = \frac{h}{10^{-3} m v}$$

$$\therefore \Delta x = \frac{6.63 \times 10^{-34}}{10^{-3} \times 2 \times 10^{-3} \times 1.5}$$

$$\Delta x = 2.21 \times 10^{-28} \text{ m}$$

For the electron,

$$m = 9.1 \times 10^{-31} \text{ kg}$$

$$v = 0.5 \times 10^8 \text{ m/s}$$

$$\therefore \Delta x = \frac{6.63 \times 10^{-34}}{10^{-3} \times 9.1 \times 10^{-31} \times 0.5 \times 10^8}$$

$$\therefore \Delta x = 1.46 \times 10^{-8} \text{ m}$$

Q.39 An electron has a speed of 600 m/s with an accuracy of 0.005 %. Calculate the uncertainty with which we can locate the position of the electron.

👉 [SPPU : Dec.-99]

Ans. : Given data : $\Delta v = \frac{0.005}{100} \times 600 = 0.03 \text{ m/s}$

$$h = 6.63 \times 10^{-34} \text{ J-s}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

Formula : $\Delta x \Delta p = h$

$$\therefore \Delta x = \frac{h}{\Delta p} = \frac{h}{m \Delta v}$$

$$\therefore \Delta x = \frac{6.63 \times 10^{-34}}{9.1 \times 10^{-31} \times 0.03}$$

$$\therefore \Delta x = 0.0243 \text{ m}$$

Q.40 A bullet of mass 25 grams is moving with a speed of 400 m/s. The speed is measured accurate upto 0.02 %. Calculate the certainty with which the position of the bullet can be located.

☞ [SPPU : May-2000]

Ans. : Given data : $h = 6.63 \times 10^{-34}$ J-s

$$m = 25 \text{ gm} = 25 \times 10^{-3} \text{ kg}$$

$$\Delta v = \frac{0.02}{100} \times 400 = 0.08 \text{ m/s}$$

Formula : $\Delta x \Delta p = h$

$$\therefore \Delta x = \frac{h}{\Delta p} = \frac{h}{m \Delta v}$$

$$\Delta x = \frac{6.63 \times 10^{-34}}{25 \times 10^{-3} \times 0.08}$$

$\therefore$

$$\Delta x = 3.315 \times 10^{-31} \text{ m}$$

Q.41 Calculate the minimum uncertainty in the velocity of an electron confined to a box of length 10 Å.
☞ [SPPU : Dec.-2000]

Ans. : Given data : $(\Delta x)_{\max} = 10 \text{ Å} = 10 \times 10^{-10} \text{ m}$

$$h = 6.63 \times 10^{-34} \text{ J-s}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

Formula : $\Delta x \Delta p = h$

$$\therefore \Delta x \cdot m \Delta v = h$$

$$\Delta v = \frac{h}{m \Delta x}$$

$$\therefore (\Delta v)_{\min} = \frac{h}{m(\Delta x)_{\max}}$$

$$\therefore (\Delta v)_{\min} = \frac{6.63 \times 10^{-34}}{9.1 \times 10^{-31} \times 10 \times 10^{-10}}$$

$\therefore$

$$(\Delta v)_{\min} = 7.286 \times 10^5 \text{ m/s}$$

Q.42 If the uncertainty in location of a particle is equal to its de Broglie wavelength, show that the uncertainty in its velocity is equal to its velocity.  [SPPU : May-12, Dec-13, Marks 3]

Ans. : Given data : $\Delta x = \lambda$

Formula : $\Delta x \Delta p = h$

$$\Delta x = \lambda = \frac{h}{mv}$$

$$\Delta p = m\Delta v$$

$$\therefore \frac{h}{mv} \cdot m\Delta v = h$$

$\therefore$

$$\Delta v = v$$

Q.43 An electron is confined to a box of length $2\text{\AA}$. Calculate the minimum uncertainty in its velocity.  [SPPU : Dec.-06]

Ans. : Given data :

$$h = 6.63 \times 10^{-34} \text{ J-s}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

$$(\Delta x)_{\max} = 2 \text{ \AA} = 2 \times 10^{-10} \text{ m}$$

Formula : $\Delta x \Delta p = h$

$$\Delta p = m\Delta v$$

$$\therefore \Delta x \cdot m\Delta v = h$$

$$\Delta v = \frac{h}{m\Delta x}$$

For minimum uncertainty in velocity, the uncertainty in position is maximum.

$$\therefore (\Delta v)_{\min} = \frac{h}{m(\Delta x)_{\max}}$$

$$\therefore (\Delta v)_{\min} = \frac{6.63 \times 10^{-34}}{9.1 \times 10^{-31} \times 2 \times 10^{-10}}$$

$$\therefore (\Delta v)_{\min} = 3.643 \times 10^6 \text{ m/s}$$

Q.44 The position and momentum of 1 keV electron are simultaneously measured. If its position is located with 1 Å. Find the percentage of uncertainty in its momentum.

(Given : $h = 6.64 \times 10^{-34}$ J-sec., $m = 9.1 \times 10^{-31}$ kg)

[SPPU : Dec.-12, Marks 3]

Ans. : Given data : $\Delta x = 1 \text{ Å} = 1 \times 10^{-10} \text{ m}$

$$h = 6.64 \times 10^{-34} \text{ Js}$$

$$E = 1 \text{ keV} = 1.6 \times 10^{-16} \text{ J}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

Formula : $\Delta x \Delta p = h$

$$\therefore 1 \times 10^{-10} \Delta p = 6.64 \times 10^{-34}$$

$$\therefore \Delta p = 6.64 \times 10^{-24} \text{ kg-m/s}$$

$$E = \frac{p^2}{2m}$$

$$\therefore p = \sqrt{2mE} = \sqrt{2 \times 9.1 \times 10^{-31} \times 1.6 \times 10^{-16}}$$

$$\therefore p = 1.706 \times 10^{-23} \text{ kg-m/s}$$

$$\text{Percentage uncertainty} = \frac{\Delta p}{p} \times 100 = \frac{6.64 \times 10^{-24}}{1.706 \times 10^{-23}} \times 100$$

$$\therefore \text{Percentage uncertainty} = 38.92 \%$$

6.5 : Wave Function and its Physical Significance

Q.45 What is wave function ψ ? Write down the conditions satisfied by wave function ψ . [SPPU : Dec - 13, May 15, Marks 4]

Ans. : • Every wave is characterized by periodic variation in some physical quantity. For example, pressure varies periodically in sound waves whereas electric and magnetic fields vary periodically in an electromagnetic wave.

• Similarly, the quantity whose periodic variations make up the matter wave is called wave function ψ . The value of ψ at a particular point (x, y, z) in space at time ' t ' is related to the probability of finding the particle there at that time.

- ψ itself does not have any direct physical significance and is not an experimentally measurable quantity.

Conditions satisfied by wave function ψ

- ψ should be normalized wave function so that $|\psi|^2$ will represent probability.
- As probability is a single valued function, ψ must also be a single valued function at every point in space.
- ψ must be finite at each and every point in space.
- ψ must be continuous in the region where it is defined.
- The first order derivatives of ψ , i.e., $\frac{\partial \psi}{\partial x}$, $\frac{\partial \psi}{\partial y}$ and $\frac{\partial \psi}{\partial z}$ must be continuous in the region where ψ is defined.

Q.46 Explain the physical significance of ψ and $|\psi|^2$.

 [SPPU : Dec.-12, May-15, Marks 4]

Ans. : • According to Max Born's interpretation, the probability of finding the particle described by the wave function ψ at a point (x, y, z) in space at time ' t ' proportional to the value of $|\psi|^2$ at that point at time ' t '.

- A large value of $|\psi|^2$ represents larger probability of finding the particle.
- The probability of finding the particle is zero at a point only if $|\psi|^2 = 0$ at that point. Even if there is a small value of $|\psi|^2$ at a point, there will be some probability of detecting the particle there.
- The probability of finding the particle in a certain volume element $dv = dx dy dz$ is $|\psi|^2 dv$ which is called the probability density if $|\psi|^2$ represents probability.
- As the particle has to exist somewhere in space, the total probability of finding the particle is 1. i.e,

$$\int_{-\infty}^{\infty} |\psi|^2 dv = 1 \quad \dots (1)$$

- The above condition is satisfied only if $|\psi|^2$ represents probability. But, in general, the wave functions obtained as solutions of differential equations do not satisfy equation (1). Instead, on integrating over the whole volume, yield a finite positive and real quantity, say N^2 i.e.,

$$\int_{-\infty}^{\infty} |\psi|^2 dv = N^2$$

- Normalized wave function ψ_N is then constructed from ψ as,

$$\psi_N = \frac{\psi}{N}$$

and

$$\psi_N^* = \frac{\psi^*}{N}$$

- The normalized wave function satisfies equation (1) so that $|\psi_N|^2$ represents probability. The process of constructing ψ_N from ψ is called normalization of the wave function.

Q.47 What is wave function ? Explain what is normalization of wave function.

👉 [SPPU : Dec.-14, 15, Marks 4]

Ans. : Refer Q.45 and Q.46.

Q.48 Explain why probability of finding of a particle cannot be predicted by the interpretation of wave function Ψ . Explain physical significance of $|\Psi|^2$.

👉 [SPPU : May-16, Marks 4]

Ans. : Refer Q.45 and Q.46.

Q.49 Write down the conditions which are to be satisfied by well behaved wave function.

👉 [SPPU : Dec.-16, May-19, Marks 4]

Ans. : Refer Q.45 and Q.46.

Q.50 Explain physical significance of wave function Ψ and $(\Psi)^2$. State the mathematical conditions that wave function Ψ should satisfy.

👉 [SPPU : May-17, Marks 4]

Ans. : Refer Q.45 and Q.46.

Q.51 Explain wave-function ψ . Give the physical significance of $|\psi|^2$

👉 [SPPU : May-18, Dec.-18, Marks 4]

Ans. : Refer Q.45 and Q.46.

6.6 : Schrödinger's Time Independent Wave Equation

Q.52 Derive Schrodinger's time independent wave equation.

 [SPPU : Dec-12,14,15, May-13,14,15,16,17,19, Marks 6]

Ans. : • The general differential equation for a wave with wave function ' ψ ', travelling with velocity ' u ' in three dimensions is

$$\frac{\partial^2 \psi}{\partial t^2} = u^2 \left[\frac{\partial^2 \psi}{\partial x^2} + \frac{\partial^2 \psi}{\partial y^2} + \frac{\partial^2 \psi}{\partial z^2} \right]$$

i.e.,
$$\frac{\partial^2 \psi}{\partial t^2} = u^2 \nabla^2 \psi \quad \dots (1)$$

where
$$\nabla^2 \equiv \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} + \frac{\partial^2}{\partial z^2}$$

is called the Laplace operator.

- The general solution of equation (1) is of the form

$$\psi(x, y, z, t) = \psi_0(x, y, z) e^{-i\omega t} \quad \dots (2)$$

where $\psi_0(x, y, z)$ is the amplitude of the wave at point (x, y, z) .

- The above equation can also be written as

$$\psi(\vec{r}, t) = \psi_0(\vec{r}) e^{-i\omega t} \quad \dots (3)$$

where $\vec{r} = x\hat{i} + y\hat{j} + z\hat{k}$ is the position vector of the point (x, y, z) .

- Differentiating equation (3) partially with respect to ' t ' twice,

$$\begin{aligned} \frac{\partial \psi}{\partial t} &= -i\omega \psi_0 e^{-i\omega t} \\ \frac{\partial^2 \psi}{\partial t^2} &= (-i\omega)(-i\omega) \psi_0 e^{-i\omega t} \\ \frac{\partial^2 \psi}{\partial t^2} &= -\omega^2 \psi_0 e^{-i\omega t} \end{aligned}$$

But
$$\psi = \psi_0 e^{-i\omega t}$$

$\therefore$
$$\frac{\partial^2 \psi}{\partial t^2} = -\omega^2 \psi$$

- Substituting in equation (1),

$$-\omega^2 \psi = u^2 \nabla^2 \psi$$

$$\nabla^2 \psi + \frac{\omega^2}{u^2} \psi = 0 \quad \dots (4)$$

$$\omega = 2\pi\nu = 2\pi \frac{u}{\lambda}$$

$$\therefore \frac{\omega}{u} = \frac{2\pi}{\lambda}$$

$$\frac{\omega^2}{u^2} = \frac{4\pi^2}{\lambda^2} \quad \dots (5)$$

- From de Broglie hypothesis for matter waves,

$$\lambda = \frac{h}{p}$$

$$\therefore \lambda^2 = \frac{h^2}{p^2} \quad \dots (6)$$

- The total energy (E) of particle is a sum of kinetic energy $\left(\frac{1}{2}mv^2\right)$ and potential energy V .

$$E = \frac{1}{2}mv^2 + V = \frac{m^2v^2}{2m} + V$$

$$\therefore E = \frac{p^2}{2m} + V$$

$$\therefore p^2 = 2m(E - V)$$

- Substituting in equation (6),

$$\lambda^2 = \frac{h^2}{2m(E - V)}$$

- Substituting in equation (5),

$$\frac{\omega^2}{u^2} = 4\pi^2 \times \frac{2m(E - V)}{h^2}$$

$$\therefore \frac{\omega^2}{u^2} = \frac{8\pi^2m}{h^2}(E - V)$$

- Substituting in equation (4),

$$\nabla^2 \psi + \frac{8\pi^2 m}{h^2} (E - V) \psi = 0 \quad \dots (7)$$

- The quantity $\frac{h}{2\pi}$ appears very frequently in quantum mechanics and hence is substituted as $\hbar$.

$$\therefore \nabla^2 \psi + \frac{2m}{\hbar^2} (E - V) \psi = 0 \quad \dots (8)$$

Equation (7) or (8) is the Schrödinger's time independent wave equation.

Q.53 Starting from de-Broglie hypothesis, derive Schrodinger's time independent wave equation.

Ans. : Refer Q.52

6.7 : Schrödinger's Time Dependent Wave Equation

Q.54 Derive Schrodinger's time dependent wave equation.

 [SPPU : May-11, Marks 7]

Ans. : • The general differential equation for a wave with wave function ψ , travelling with velocity 'u' in three dimensions is,

$$\frac{\partial^2 \psi}{\partial t^2} = u^2 \nabla^2 \psi \quad \dots (1)$$

where $\nabla^2 \equiv \frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} + \frac{\partial^2}{\partial z^2}$ is the Laplace operator.

- The general solution of equation (2) is of the form,

$$\psi(x, y, z, t) = \psi_0(x, y, z) e^{-i\omega t} \quad \dots (2)$$

where $\psi_0(x, y, z)$ is the amplitude of the wave at point (x, y, z) .

- The above equation can also be written as,

$$\psi(\vec{r}, t) = \psi_0(\vec{r}) e^{-i\omega t} \quad \dots (3)$$

where $\vec{r} = x\hat{i} + y\hat{j} + z\hat{k}$ is the position vector of the point (x, y, z) .

- Differentiating equation (3) partially with respect to 't',

$$\frac{\partial \psi}{\partial t} = -i\omega \psi_0 e^{-i\omega t}$$

$$\therefore \frac{\partial \psi}{\partial t} = -i\omega \psi \quad \dots (4)$$

As $\omega = 2\pi\nu$ and $E = h\nu$,

$$\omega = 2\pi \frac{E}{h}$$

- From equation (4),

$$\frac{\partial \psi}{\partial t} = \frac{-i 2\pi E}{h} \psi$$

$$\therefore E\psi = \frac{-h}{i 2\pi} \frac{\partial \psi}{\partial t}$$

$$\therefore E\psi = \frac{ih}{2\pi} \frac{\partial \psi}{\partial t} \quad \dots (5)$$

- Schrödinger's time independent equation is

$$\nabla^2 \psi + \frac{8\pi^2 m}{h^2} (E - V)\psi = 0$$

$$\therefore \frac{h^2}{8\pi^2 m} \nabla^2 \psi + (E - V)\psi = 0$$

$$\frac{-h^2}{8\pi^2 m} \nabla^2 \psi + V\psi = E\psi$$

- Substituting for $E\psi$ from equation (5),

$$\frac{-h^2}{8\pi^2 m} \nabla^2 \psi + V\psi = \frac{ih}{2\pi} \frac{\partial \psi}{\partial t} \quad \dots (6)$$

- The above equation is known as Schrödinger's time dependent wave equation.

6.8 : Particle in a Rigid Box (Infinite Potential Well)

Q.55 Derive equation of energy and wave function when a free particle is trapped in an infinite potential well.

 [SPPU : Dec.-09, 11, May-10,12, Marks 7]

Ans. :

- The physical problem of particle confined between two rigid walls can be converted into a problem of potential distribution by specifying the potential energy of the particle to be infinite at and beyond the walls as shown in Fig. Q.55.1 i.e.,

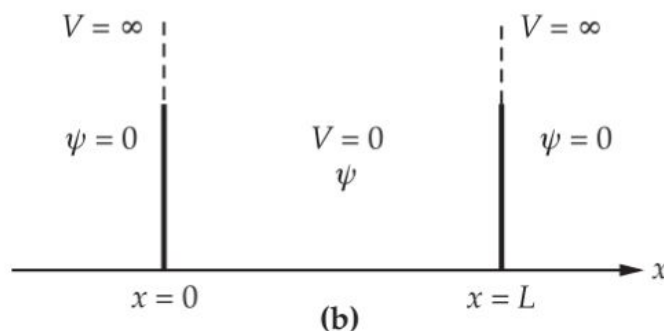
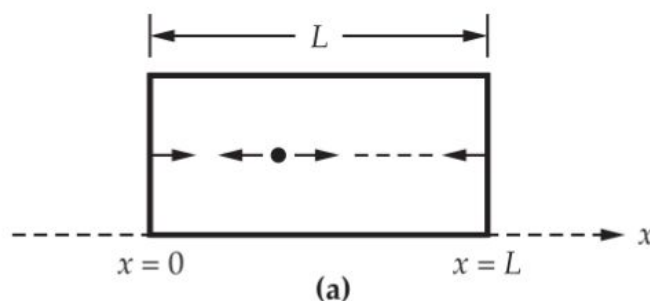


Fig. Q.55.1

$V = \infty$ for $x \leq 0$ and

for $x \geq L$

- The potential energy of the particle is constant within the box which can be taken to be zero for convenience i.e.,

$$V = 0 \text{ for } 0 < x < L$$

- The potential energy distribution is shown in Fig. Q.55.1 (b). It is as if the particle is inside an infinite potential well. As the particle does not exist at the walls and beyond them,

$$\psi = 0 \text{ for } x \leq 0 \text{ and } x \geq L$$

- The wave function ψ exists only for $0 < x < L$. Schrödinger's time independent wave equation is

$$\nabla^2 \psi + \frac{8\pi^2 m}{h^2} (E - V) \psi = 0 \quad \dots(1)$$

- As it is a problem in one dimension along x-axis, $\nabla^2 \psi$ can be replaced by $\frac{\partial^2 \psi}{\partial x^2}$ which in turn can be replaced by $\frac{d^2 \psi}{dx^2}$ as ψ is a function of x only. Also, substituting $V = 0$ for $0 < x < L$ in equation (1),

$$\frac{d^2 \psi}{dx^2} + \frac{8\pi^2 m}{h^2} E \psi = 0 \quad \dots (2)$$

$$\text{Let} \quad K^2 = \frac{8\pi^2 mE}{h^2} \quad \dots (3)$$

$$\therefore \quad \frac{d^2\psi}{dx^2} + K^2\psi = 0 \quad \dots (4)$$

- The general solution of equation (4) is

$$\psi = A \sin Kx + B \cos Kx \quad \dots (5)$$

where A and B are arbitrary constants which are to be determined using boundary conditions.

- The first boundary condition is

$$\psi = 0 \quad \text{at} \quad x = 0$$

$\therefore$ From equation (5),

$$0 = A \sin 0 + B \cos 0$$

$$B = 0$$

$\therefore$ From equation (5)

$$\psi = A \sin Kx \quad \dots (6)$$

- The second boundary condition is

$$\psi = 0 \quad \text{at} \quad x = L$$

$\therefore$ From equation (6),

$$0 = A \sin KL$$

$A \neq 0$ as for $A = 0$, $\psi = 0$ for all values of x which will mean that the particle does not exist inside the box.

$$\therefore \quad \sin KL = 0$$

$$\therefore \quad KL = n\pi ; \quad n = 1, 2, 3, \dots$$

$n \neq 0$ as $n = 0 \Rightarrow \psi = 0$ for all values of x which is not possible.

$$\therefore \quad K = \frac{n\pi}{L} \quad \dots (7)$$

- From equations (3) and (6),

$$\frac{8\pi^2 mE}{h^2} = \frac{n^2 \pi^2}{L^2}$$

- As energy 'E' depends on 'n', we use suffix 'n' for 'E'.

$$\therefore E_n = \frac{n^2 h^2}{8mL^2} \quad \dots (8)$$

where, $n = 1, 2, 3, \dots$

- From the above equation, the smallest value of energy that the particle can have is

$$E_1 = \frac{h^2}{8mL^2}$$

which is non-zero. This contradicts classical mechanics, according to which the particle can have zero energy.

- The other possible values of energy are $E_2 = \frac{4h^2}{8mL^2}$, $E_3 = \frac{9h^2}{8mL^2}$, etc.
- These energy values are discrete. They are not continuous as expected from classical mechanics.
- Thus, according to quantum mechanics, the particle inside a rigid box cannot have all values of energy, but only those discrete values which are given by equation (8).
- These discrete energy values are known as energy eigen values. These energy levels are shown in Fig. Q.55.2

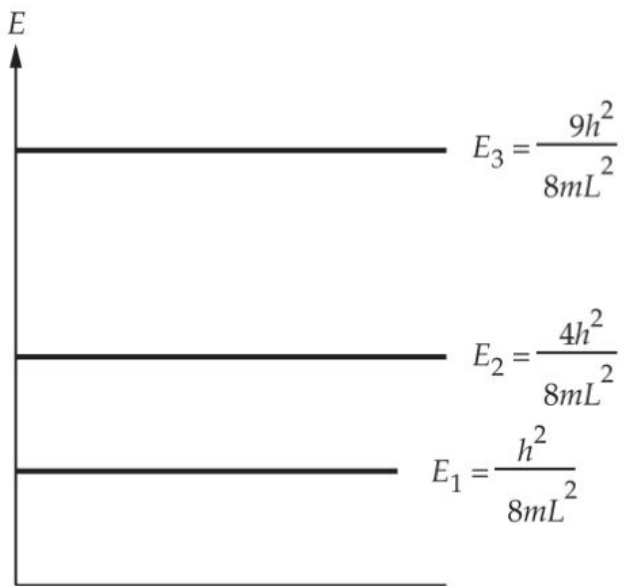


Fig. Q.55.2

Wave function :

- Substituting equation (7) in equation (6), we get,

$$\psi = A \sin\left(\frac{n\pi x}{L}\right) \quad \dots (9)$$

- The complex conjugate of ψ is

$$\psi^* = A \sin\left(\frac{n\pi x}{L}\right)$$

To normalize the wave function, we find $\int_0^L \psi\psi^* dx$

$$\begin{aligned} \int_0^L \psi\psi^* dx &= \int_0^L A^2 \sin^2\left(\frac{n\pi x}{L}\right) dx \\ &= A^2 \int_0^L \left[\frac{1 - \cos\left(\frac{n\pi x}{L}\right)}{2} \right] dx \\ &= \frac{A^2}{2} \left[x - \frac{\sin\left(\frac{n\pi x}{L}\right)}{\left(\frac{n\pi}{L}\right)} \right]_0^L \\ &= \frac{A^2}{2} [L - 0] \end{aligned}$$

$$\therefore \int_0^L \psi\psi^* dx = \frac{A^2 L}{2}$$

- Let the R.H.S. be N^2 i.e.,

$$N^2 = \frac{A^2 L}{2}$$

or

$$N = A\sqrt{\frac{L}{2}}$$

- The normalized wave function ψ_n is obtained using

$$\begin{aligned} \psi_n &= \frac{\psi}{N} \\ \therefore \psi_n &= \frac{A \sin\left(\frac{n\pi x}{L}\right)}{\left(A\sqrt{\frac{L}{2}}\right)} \end{aligned}$$

$$\therefore \psi_n = \sqrt{\frac{2}{L}} \sin\left(\frac{n\pi x}{L}\right) \quad \dots (10)$$


- These normalized wave functions are called eigen functions.

$$\psi_n^* = \sqrt{\frac{2}{L}} \sin\left(\frac{n\pi x}{L}\right)$$

- The probability function is

$$P(x) = |\psi_n|^2 = \psi_n \psi_n^* = \frac{2}{L} \sin^2\left(\frac{n\pi x}{L}\right) \quad \dots (11)$$

- The wave function and probability functions for $n = 1, 2, 3$ are shown in Fig. Q.55.3

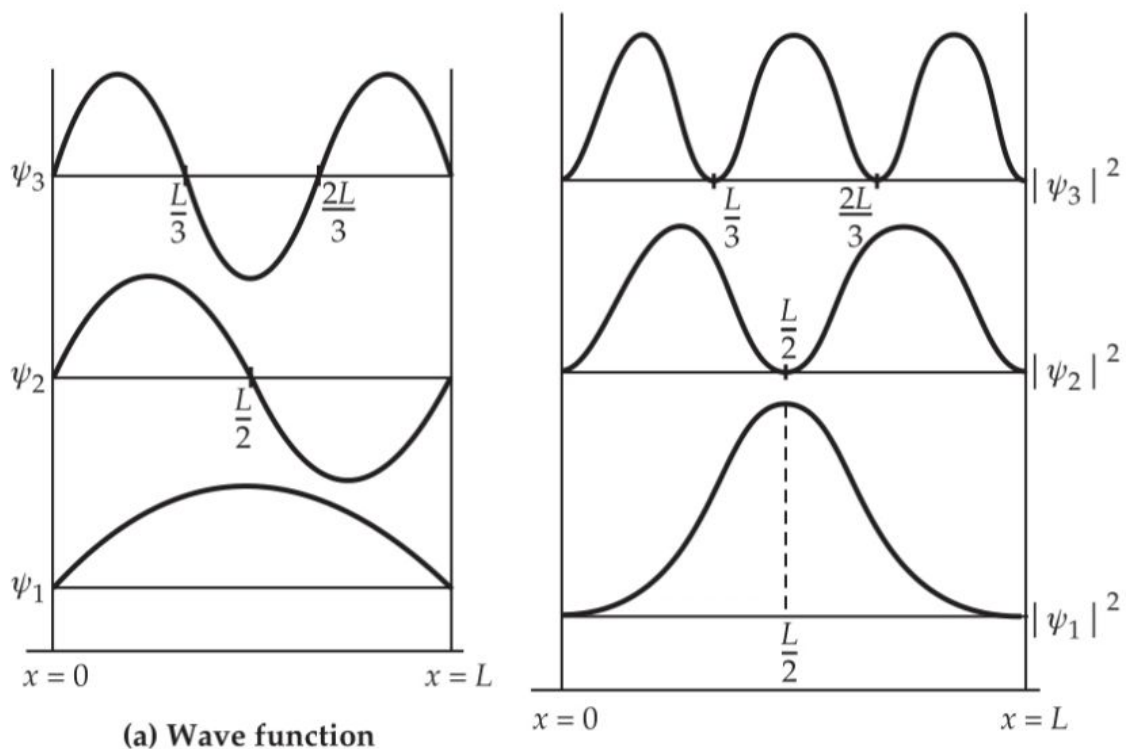

(a) Wave function

(b) Probability function

Fig. Q.55.3 (a)

Fig. Q.55.3 (b)

Q.56 Derive an expression for energy of a particle trapped in an infinite potential well.

👉 [SPPU : Dec.-13, 16 Marks 6]

Ans. : Refer Q.55

Q.57 Derive equation of energy when a particle is confined to an infinite potential well. Draw first three energy levels for an electron confined in it.

👉 [SPPU : May-18, Marks 6]

Ans. : Refer Q.55

Q.58 Derive expression for the energy and wave function of a particle enclosed in an infinite potential well (rigid box).

☞ [SPPU : Dec.-18, Marks 6]

Ans. : Refer Q.55.

Important Formula

$$E_n = \frac{n^2 h^2}{8mL^2}$$

Q.59 Compare the lowest three energy states for (i) An electron confined in a potential well of width 10 Å and (ii) A grain of dust with mass 10^{-6} gm in an infinite potential well of width 0.1 mm. What can you conclude from this comparison ? ☞ [SPPU : Dec.-03]

Ans. : For a particle of mass ' m ' in an infinite potential well, the energy levels are given by,

Formula : $E_n = \frac{n^2 h^2}{8mL^2}$

i) Given : $m = 9.1 \times 10^{-31}$ kg

$$L = 10 \text{ Å} = 10 \times 10^{-10} \text{ m}$$

∴ $L = 10^{-9} \text{ m}$

$$h = 6.63 \times 10^{-34} \text{ J-s}$$

∴ $E_n = \frac{n^2 \times (6.63 \times 10^{-34})^2}{8 \times 9.1 \times 10^{-31} \times (10^{-9})^2} \text{ J}$

$$= n^2 \times 6.038 \times 10^{-20} \text{ J}$$

$$= \frac{n^2 \times 6.038 \times 10^{-20}}{1.6 \times 10^{-19}} \text{ eV}$$

$$E_n = 0.3774 n^2 \text{ eV}$$

The lowest three energy states are obtained for $n = 1, 2$ and 3 .

$$E_1 = 0.3774 \text{ eV}$$

$$E_2 = 0.3774 \times 2^2 = 1.5096 \text{ eV}$$

$$E_3 = 0.3774 \times 3^2 = 3.3966 \text{ eV}$$

ii) Given :

$$\begin{aligned}
 m &= 10^{-6} \text{ gm} = 10^{-9} \text{ kg} \\
 L &= 0.1 \text{ mm} = 10^{-4} \text{ m} \\
 E_n &= \frac{n^2 \times (6.63 \times 10^{-34})^2}{8 \times 10^{-9} \times (10^{-4})^2} \text{ J} \\
 &= n^2 \times 5.4946 \times 10^{-51} \text{ J} \\
 &= \frac{n^2 \times 5.4946 \times 10^{-51}}{1.6 \times 10^{-19}} \text{ eV}
 \end{aligned}$$

$$\therefore E_n = 3.434 \times 10^{-32} n^2 \text{ eV}$$

The lowest three energy states are,

$$\begin{aligned}
 E_1 &= 3.434 \times 10^{-32} \text{ eV} \\
 E_2 &= 3.434 \times 10^{-32} \times 2^2 = 1.37365 \times 10^{-31} \text{ eV} \\
 E_3 &= 3.434 \times 10^{-32} \times 3^2 = 3.091 \times 10^{-31} \text{ eV}
 \end{aligned}$$

The energy levels of dust are very close to each other and hence will appear continuous whereas the energy difference is larger for electrons due to which the energy levels will appear discrete. Hence the quantization of energy will be observed more easily for the smaller particle, i.e., electron, compared to the larger dust particles.

Q.60 Lowest energy of an electron trapped in a potential well is 38 eV. Calculate the width of the well.

☞ [SPPU : Dec.-04,17, May-05,19]

Ans. : Given :

$$\begin{aligned}
 E_1 &= 38 \text{ eV} = 38 \times 1.6 \times 10^{-19} \text{ J} \\
 h &= 6.63 \times 10^{-34} \text{ J-s} \\
 m &= 9.1 \times 10^{-31} \text{ kg}
 \end{aligned}$$

Formula :

$$E_1 = \frac{h^2}{8mL^2}$$

$$L^2 = \frac{h^2}{8mE_1}$$

$$= \frac{(6.63 \times 10^{-34})^2}{8 \times 9.1 \times 10^{-31} \times 38 \times 1.6 \times 10^{-19}}$$

$$L^2 = 9.93 \times 10^{-21}$$

$$\therefore L = 9.965 \times 10^{-11} \text{ m}$$

$$\therefore \boxed{L = 0.9965 \text{ \AA}}$$

Q.61 An electron is bound by a potential which closely approaches an infinite square well of width 1 Å. Calculate the lowest three permissible energies (in electron volts) the electron can have.

📖 [SPPU : Dec.-05, May-10,11,18]

Ans. : Given data :

$$h = 6.63 \times 10^{-34} \text{ J-s}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

$$L = 1 \text{ \AA} = 10^{-10} \text{ m}$$

Formula :

$$E_n = \frac{n^2 h^2}{8mL^2}$$

$$\therefore E_n = \frac{n^2 \times (6.63 \times 10^{-34})^2}{8 \times 9.1 \times 10^{-31} \times (10^{-10})^2} \text{ J}$$

$$= n^2 \times 6.038 \times 10^{-18} \text{ J}$$

$$= \frac{n^2 \times 6.038 \times 10^{-18}}{1.6 \times 10^{-19}} \text{ eV}$$

$$\therefore E_n = 37.74 n^2 \text{ eV}$$

The lowest three permissible energies are

$$E_1 = 37.74 \text{ eV}$$

$$E_2 = 37.74 \times 2^2 = 150.96 \text{ eV}$$

$$E_3 = 37.74 \times 3^2 = 339.66 \text{ eV}$$

Q.62 An electron is trapped in a rigid box of width 2 Å. Find its lowest energy level and momentum. Hence find energy of the third energy level.

👉 [SPPU : May-06,12, Dec.-18]

Ans. : Given :

For lowest energy, $n = 1$

$$h = 6.63 \times 10^{-34} \text{ J-s}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

$$L = 2 \text{ Å} = 2 \times 10^{-10} \text{ m}$$

Formula :

$$E_n = \frac{n^2 h^2}{8mL^2}, p = \sqrt{2mE}$$

$$\begin{aligned} E_1 &= \frac{(6.63 \times 10^{-34})^2}{8 \times 9.1 \times 10^{-31} \times (2 \times 10^{-10})^2} \text{ J} \\ &= 1.5095 \times 10^{-18} \text{ J} \\ &= \frac{1.5095 \times 10^{-18}}{1.6 \times 10^{-19}} \text{ eV} \end{aligned}$$

∴

$$E_1 = 9.434 \text{ eV}$$

The corresponding momentum is,

$$\begin{aligned} p_1 &= \sqrt{2mE_1} \\ &= \sqrt{2 \times 9.1 \times 10^{-31} \times 1.5095 \times 10^{-18}} \end{aligned}$$

∴

$$p_1 = 1.66 \times 10^{-24} \text{ kg-m/s}$$

The third energy level is

$$\begin{aligned} E_3 &= E_1 \times 3^2 \\ &= 9.434 \times 3^2 \end{aligned}$$

∴

$$E_3 = 84.906 \text{ eV}$$

Q.63 An electron is confined in an infinite potential well of width 5 Å°. Calculate the energy and wavelength of the emitted photon if the electron makes a transition from its $n = 2$ energy level to $n = 1$.

Ans. : Given data :

$$h = 6.63 \times 10^{-34} \text{ J-s}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

$$L = 5 \text{ Å}^\circ = 5 \times 10^{-10} \text{ m}$$

Formula :

$$E_n = \frac{n^2 h^2}{8mL^2}$$

For $n = 1$,

$$E_1 = \frac{h^2}{8mL^2}$$

For $n = 2$,

$$E_2 = \frac{4h^2}{8mL^2}$$

The energy of emitted photon is $E_2 - E_1$, i.e.,

$$E_2 - E_1 = \frac{3h^2}{8mL^2}$$

$$\begin{aligned} \therefore E_2 - E_1 &= \frac{3 \times (6.63 \times 10^{-34})^2}{8 \times 9.1 \times 10^{-31} \times (5 \times 10^{-10})^2} \\ &= 7.246 \times 10^{-19} \text{ J} \\ &= \frac{7.246 \times 10^{-19}}{1.6 \times 10^{-19}} \text{ eV} \end{aligned}$$

∴

$$E_2 - E_1 = 4.53 \text{ eV}$$

The energy of photon in terms of wavelength is $\frac{hc}{\lambda}$

$$\therefore \frac{hc}{\lambda} = 7.246 \times 10^{-19} \text{ J}$$

$$c = 3 \times 10^8 \text{ m/s}$$

$$\therefore \lambda = \frac{6.63 \times 10^{-34} \times 3 \times 10^8}{7.246 \times 10^{-19}}$$

$$\therefore \lambda = 2.745 \times 10^{-7} \text{ m}$$

Q.64 Compute energy difference between the ground state and first excited state for an electron in a one-dimensional rigid box of length 10^{-8} cm.

 [SPPU : Dec.-10, Marks 4]

Ans. : Given data :

$$h = 6.63 \times 10^{-34} \text{ J-s}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

$$L = 10^{-8} \text{ cm} = 10^{-10} \text{ m}$$

Formula :
$$E_1 = \frac{h^2}{8 mL^2}$$

and in first excited state,

$$E_2 = \frac{4 h^2}{8 mL^2}$$

The difference in energy is,

$$\begin{aligned} E_2 - E_1 &= \frac{3h^2}{8 mL^2} \\ &= \frac{3 \times (6.63 \times 10^{-34})^2}{8(9.1 \times 10^{-31})(10^{-10})^2} \\ &= 1.8114 \times 10^{-17} \text{ J} \\ &= \frac{1.8114 \times 10^{-17}}{1.6 \times 10^{-19}} \text{ eV} \end{aligned}$$

$$\therefore E_2 - E_1 = 113.21 \text{ eV}$$

Q.65 The lowest energy of an electron trapped in a rigid box is 4.19 eV. Find the width of the box in A.U.

 [SPPU : Dec.-15, Marks 3]

Ans. : Given data :

$$E_1 = 4.19 \text{ eV} = 4.19 \times 1.6 \times 10^{-19} \text{ J}$$

$$h = 6.63 \times 10^{-34} \text{ Js}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

Formula :
$$E_1 = \frac{h^2}{8 m L^2}$$

$$\therefore 4.19 \times 1.6 \times 10^{-19} = \frac{(6.63 \times 10^{-34})^2}{8 \times 9.1 \times 10^{-31} \times L^2}$$

$$\therefore \boxed{L = 3 \times 10^{-10} \text{ m}}$$

Q.66 A neutron is trapped in an infinite potential well of width 10^{-14} m. Calculate its first energy eigen value in eV.

 [SPPU : May-16, Marks 3]

Ans. : Given data :

$$h = 6.63 \times 10^{-34} \text{ Js}$$

$$m = 1.675 \times 10^{-27} \text{ kg}$$

$$L = 10^{-14} \text{ m}$$

Formula :
$$E_1 = \frac{h^2}{8 m L^2}$$

$$\begin{aligned} E_1 &= \frac{(6.63 \times 10^{-34})^2}{8 \times 1.675 \times 10^{-27} \times (10^{-14})^2} \\ &= 3.28 \times 10^{-13} \text{ J} \\ &= \frac{3.28 \times 10^{-13}}{1.6 \times 10^{-19}} \text{ eV} \end{aligned}$$

$$\therefore \boxed{E_1 = 2.05 \times 10^6 \text{ eV}}$$

Q.67 Calculate the energy required to excite the electron from its ground state to fourth excited state in rigid box of length 0.1 nm.

 [SPPU : Dec.-16, Marks 3]

Ans. : Given data :

$$h = 6.63 \times 10^{-34} \text{ J s}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

$$L = 0.1 \text{ nm} = 0.1 \times 10^{-9} \text{ m}$$

Formula :
$$E_n = \frac{n^2 h^2}{8mL^2}$$

For ground state,
$$E_1 = \frac{h^2}{8mL^2}$$

For fourth excited state,

$$E_5 = \frac{5^2 h^2}{8mL^2} = \frac{25 h^2}{8mL^2}$$

Energy required to excite the electron is

$$E_5 - E_1 = \frac{25 h^2}{8mL^2} - \frac{h^2}{8mL^2} = \frac{24 h^2}{8mL^2}$$

$$\begin{aligned} E_5 - E_1 &= \frac{3 \times (6.63 \times 10^{-34})^2}{8 \times 9.1 \times 10^{-31} \times (0.1 \times 10^{-9})^2} \\ &= 181 \times 10^{-17} \text{ J} \\ &= \frac{181 \times 10^{-17}}{1.6 \times 10^{-19}} \text{ eV} \end{aligned}$$

$\therefore$

$$E_5 - E_1 = 113.125 \text{ eV}$$

Q.68 A neutron is trapped in an infinite potential well of width 1 A. Calculate the values of energy and momentum in its ground state.

 [SPPU : May-17, Marks 3]

Ans. : Given data :

$$h = 6.63 \times 10^{-34} \text{ Js, } m = 1.675 \times 10^{-27} \text{ kg}$$

$$L = 1 \text{ Å} = 1 \times 10^{-10} \text{ m}$$

Formula :

$$E = \frac{h^2}{8mL^2}, p = \sqrt{2mE}$$

$$E = \frac{(6.63 \times 10^{-34})^2}{8 \times 1.675 \times 10^{-27} \times (1 \times 10^{-10})^2}$$

∴

$$E = 3.28 \times 10^{-21} \text{ J}$$

$$p = \sqrt{2mE}$$

$$= \sqrt{2 \times 1.675 \times 10^{-27} \times 3.28 \times 10^{-21}}$$

∴

$$p = 3.315 \times 10^{-24} \text{ kg-m/s}$$

6.9 : Particle in a Non-Rigid Box (Finite Potential Well)

Q.69 Discuss the problem of particle in a non - rigid box.

Ans. : • Consider another one dimensional problem of a particle of mass 'm' confined to a non-rigid box of length 'L'.

- As the walls are not rigid, the potential energy of the particle would be finite, say V_0 outside the box. Inside the box, the potential energy is constant, taken to be zero for convenience

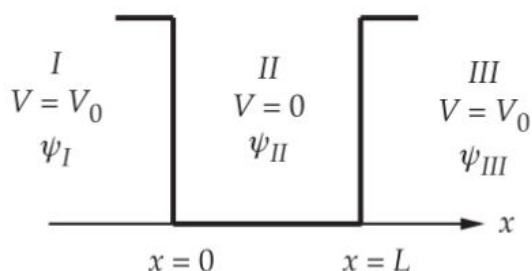


Fig. Q.69.1

- The potential energy distribution is shown in Fig. Q.69.1
- We consider a particular case of interest where $E < V_0$, i.e. the particle energy is less than the energy required to overcome the barrier represented by the walls.
- Schrödinger's time independent wave equation in one dimension is

$$\frac{d^2\psi}{dx^2} + \frac{8\pi^2m}{h^2} (E - V)\psi = 0 \quad \dots (1)$$

- In region I, $V = V_0$ and $\psi = \psi_I$

$$\therefore \frac{d^2\psi_I}{dx^2} + \frac{8\pi^2m}{h^2} (E - V_0)\psi_I = 0$$

As $E < V_0$, $E - V_0 < 0$

$$\therefore \text{Let } \frac{8\pi^2m}{h^2} (E - V_0) = -K'^2$$

$$\therefore \frac{d^2\psi_I}{dx^2} - K'^2\psi_I = 0$$

- The general solution of this equation is,

$$\psi_I = Ae^{K'x} + Be^{-K'x} \quad \dots (2)$$

- In region II, $V = 0$ and $\psi = \psi_{II}$

$$\therefore \frac{d^2\psi_{II}}{dx^2} + \frac{8\pi^2m}{h^2} E\psi_{II} = 0$$

$$\text{Let } K^2 = \frac{8\pi^2mE}{h^2}$$

$$\therefore \frac{d^2\psi_{II}}{dx^2} + K^2\psi_{II} = 0$$

- The general solution of this equation is,

$$\psi_{II} = Ce^{iKx} + De^{-iKx} \quad \dots (3)$$

- In region III, $V = V_0$, $\psi = \psi_{III}$

$$\therefore \frac{d^2\psi_{III}}{dx^2} + \frac{8\pi^2m}{h^2} (E - V_0)\psi_{III} = 0$$

$$\therefore \frac{d^2\psi_{III}}{dx^2} - K'^2\psi_{III} = 0$$

- The general solution of this equation is

$$\psi_{III} = Fe^{K'x} + Ge^{-K'x} \quad \dots (4)$$

- The condition in region I is

$$\psi_I \rightarrow 0 \text{ as } x \rightarrow -\infty$$

∴ From equation (2),

$$B = 0$$

$$\therefore \psi_I = Ae^{K'x} \quad \dots (5)$$

• Similarly in region III,

$$\psi_{III} \rightarrow 0 \text{ as } x \rightarrow \infty$$

$$\therefore F = 0$$

$$\therefore \psi_{III} = Ge^{-K'x} \quad \dots (6)$$

• The boundary conditions to be imposed on the wave function are :

i) Continuity of wave function at $x = 0$:

$$[\psi_I]_{x=0} = [\psi_{II}]_{x=0}$$

ii) Continuity of wave function at $x = L$:

$$[\psi_{II}]_{x=L} = [\psi_{III}]_{x=L}$$

iii) Continuity of first order derivative of wave function at $x = 0$:

$$\left[\frac{d\psi_I}{dx} \right]_{x=0} = \left[\frac{d\psi_{II}}{dx} \right]_{x=0}$$

iv) Continuity of first order derivative of wave function at $x = L$

$$\left[\frac{d\psi_{II}}{dx} \right]_{x=L} = \left[\frac{d\psi_{III}}{dx} \right]_{x=L}$$

- Using these four boundary conditions, the four arbitrary constants A, C, D and G in equations (3), (5) and (6) can be evaluated to obtain solution for ψ_I , ψ_{II} and ψ_{III} .
- The nature of ψ_{II} is similar to the wave function in a rigid box, except that the values at $x = 0$ and $x = L$ are not zero. ψ_I has a non-zero value at $x=0$ and decreases exponentially to zero as $x \rightarrow -\infty$. ψ_{III} has a non-zero value at $x = L$ and decreases exponentially to zero as $x \rightarrow +\infty$. The energy eigen values are discrete. The eigen functions and the corresponding probability functions are shown in Fig. Q.69.2

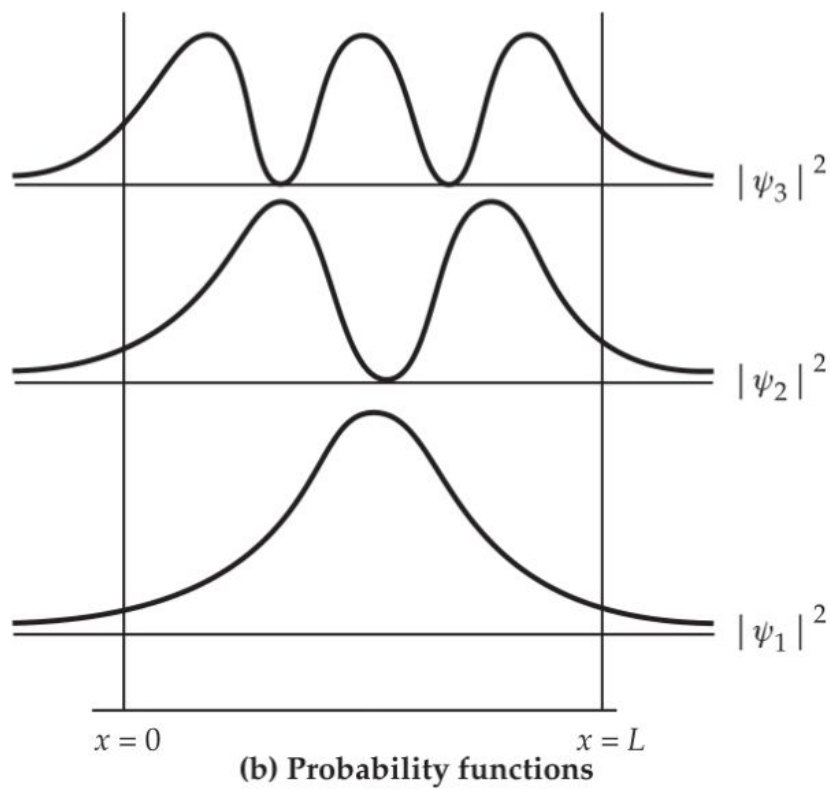
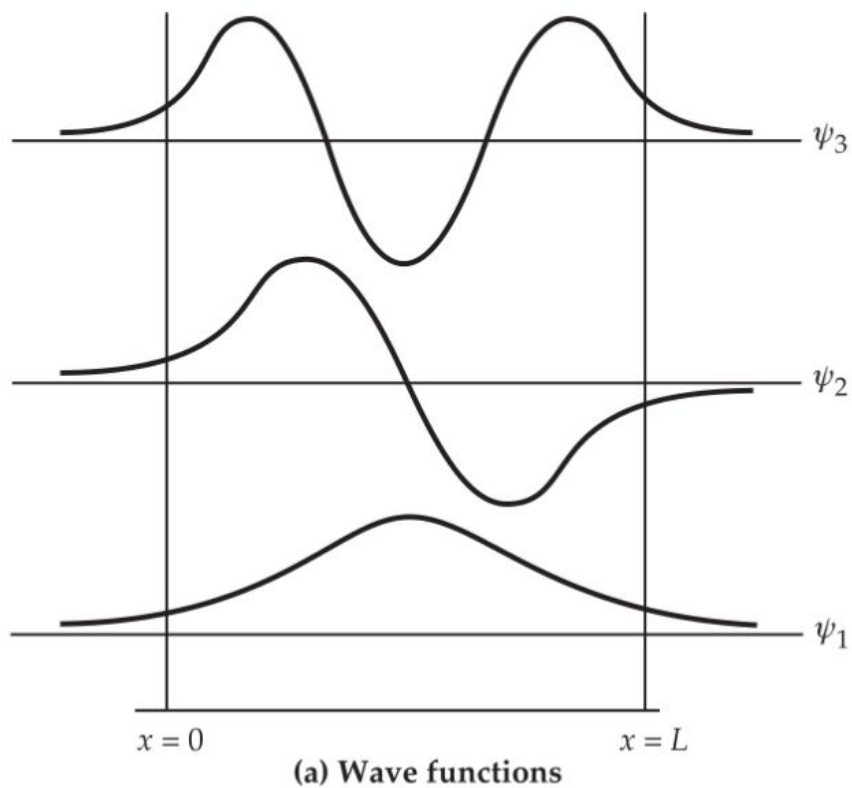


Fig. Q.69.2

- In addition to the discrete energy values and prediction of certain forbidden regions, like in the case of a rigid box, another significant result is the finite probability of finding the particle outside the box (as shown in Fig. Q.69.2 (b)).
- Even though the particle does not have sufficient energy to overcome the barrier, still there is some finite probability of the particle escaping from the box.
- This explains the phenomenon of α - decay where α -particles do not have sufficient energy to come out of the nucleus but still do escape from the nucleus. The tunnel diode and scanning tunneling microscope work on the same principle of particles being able to 'tunnel' through a barrier even though they do not have sufficient energy.

6.10 : Tunnel Diode


Q.70 Explain tunneling effect. How is this principle used in a tunnel diode.

 [SPPU : Dec.-17, Marks 4]

Ans. : • When impurity concentration in an n -type semiconductor is small. The donor levels are discrete as there is negligible interaction amongst the donor atoms.

- As the donor impurity concentration is increased the interaction amongst donor atoms increases. Due to this the donor levels which are just below the conduction band spread to form an energy band and overlap with the bottom of the conduction band.
- As a result the fermi level for n -type semiconductors with high doping concentration lies in the conduction band.
- Similarly, the fermi level in a heavily doped p -type semiconductor lies in the valence band.
- The tunnel diode is formed by heavily doped p and n -type semiconductors. The depletion region in these diodes is very thin.

- The conduction band of n -type overlaps with the valence band of p -type so as to equalize the fermi levels as shown in Fig. Q.70.1
- Under equilibrium conditions when no voltage is applied across the diode, the electrons from conduction band of n -type tunnel across the potential barrier in the depletion layer into valence band of p -type and the electrons from valence band of p -type tunnel into conduction band of n -type in equal numbers. Hence there is no current through the diode.
- When a small forward biased voltage is applied to the diode, the conduction band and fermi level in n -type is slightly raised with respect to valence band in p -type as shown in Fig. Q.70.1.
- The lower part of the n -type conduction band containing electrons is just next to the upper part of the valence band in p -type which is empty.
- As a result the electrons from the higher energy levels in conduction band of n -type tunnel into the lower energy levels in valence band of p -type.
- Tunnelling of electrons is not possible from p -type to n -type as the filled energy levels of p -type are at lower level compared to

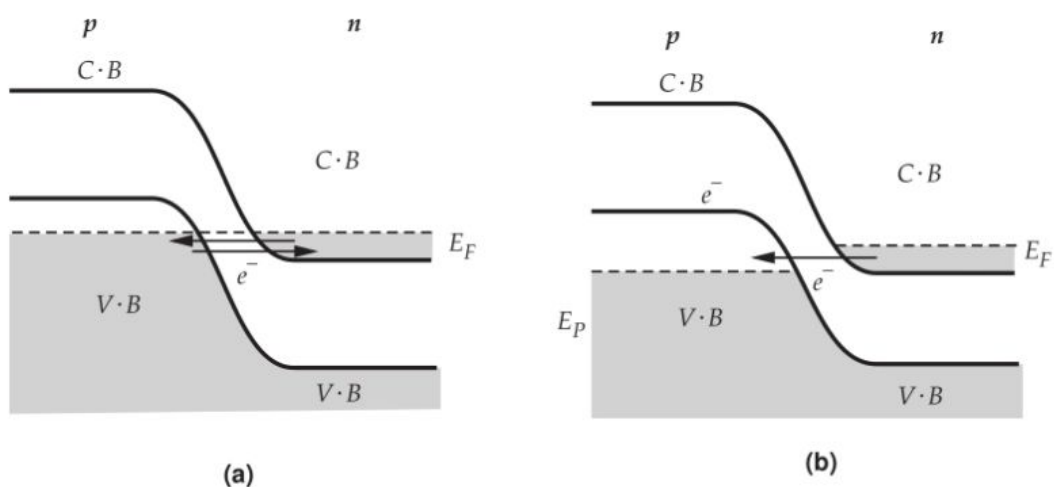

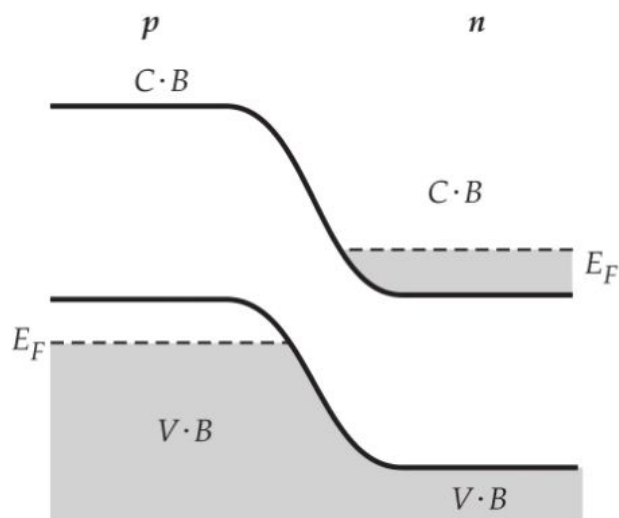


Fig. Q.70.1 (c)

empty levels of n -type. As the electrons tunnel from n -type to p -type, it constitutes a current from p -type to n -type.

- If the forward biased voltage is increased the conduction band of n -type is raised further with respect to valence band and the two bands no longer overlap as shown in Fig. Q.70.1 (c) as a result the tunnelling current decreases.

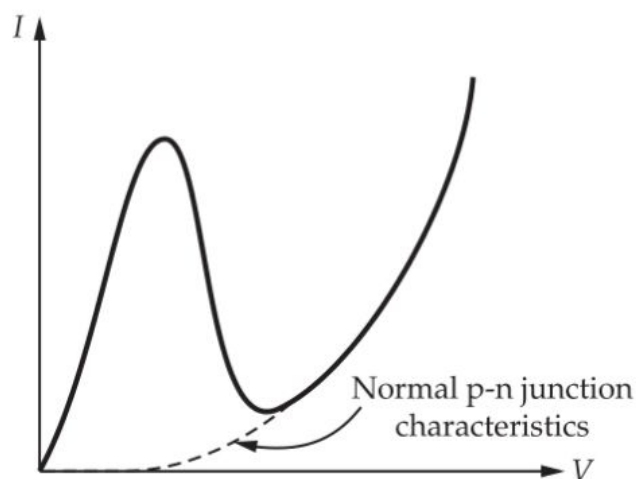


Fig. Q.70.2

- For further increase in voltage, the diffusion current starts due to injected charge carriers and the current increases exponentially as in any other p - n junction diode.

- The tunnel diode voltage-current characteristics are as shown in Fig. Q.70.2.
- The response time of tunnel diodes to small changes in voltage is very small. Hence they are used in high frequency oscillators and fast switching circuits.

6.11 : Scanning Tunneling Microscope

Q.71 Explain in brief, working of Scanning Tunneling Microscope (STM).

 [SPPU : May - 14, Marks 4]

Ans. : • The scanning tunneling microscope consists of a probe with a fine tip that is made to move on a surface which is to be studied.

- The probe is kept at a positive potential with respect to that surface and kept at a distance of about 1 nm above the surface.
- The microscope can be used in either constant height mode or the constant current mode.

Constant height mode :

- In this mode, the probe is maintained at a constant height above the surface.
- Due to the positive potential of the probe tip, electrons on the surface tunnel through to the probe tip giving rise to a small current.
- As the tip moves on the surface at a constant height, the distance of the tip from the surface changes due to the irregularities on the surface.
- As a result, the probe current changes. It increases when the distance of the probe tip from the surface decreases.
- Thus the probe current gives an indication of the surface topography when the probe tip is scanned on the surface as shown in Fig. Q.71.1 (see fig.Q.71.1 on next page)

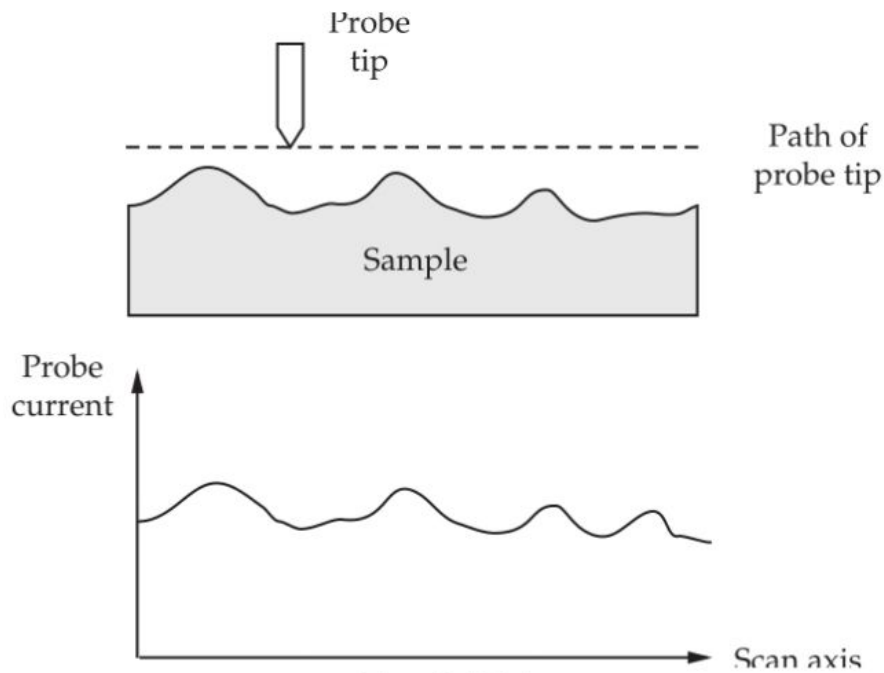


Fig. Q.71.1

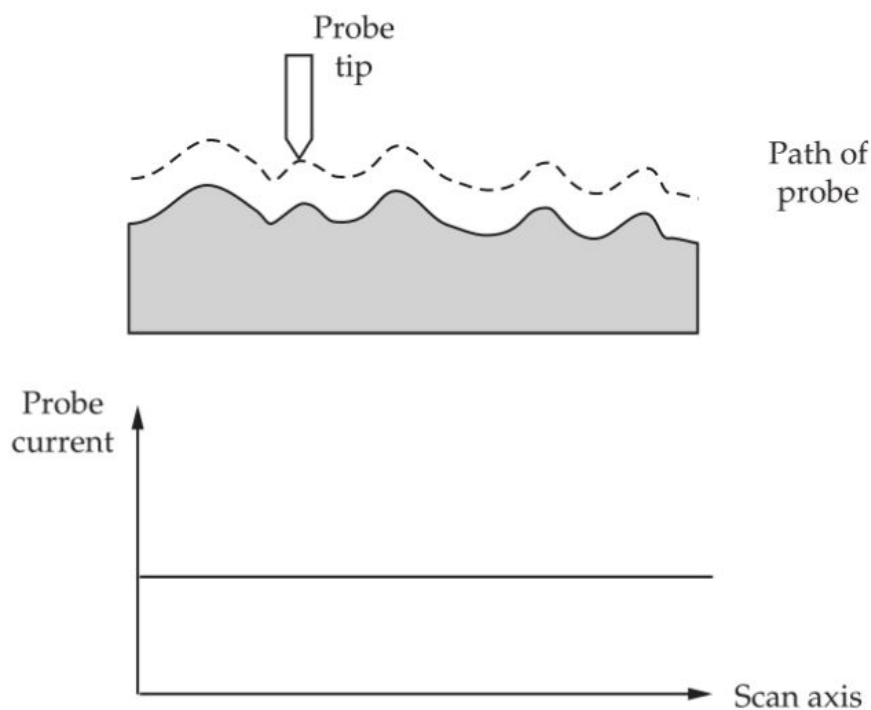


Fig. Q.71.2

Constant current mode :

- In this mode, the distance of the probe tip from the surface is varied so as to get a constant current.
- The movement of the probe tip perpendicular to the surface is recorded which is directly the surface topography as shown in above Fig. Q.71.2.

6.12 : Quantum Computing

Q.72 Explain the basic principle of working of quantum computers.

Ans. : • In digital computers, the basic unit of information is the 'bit'.

- A bit is a system that has two states, which we call '0' and '1'. For example, it can be a switch with two states 'ON' representing '1' and 'OFF' representing '0'
- The bits are classical states and hence a system will be either in its '0' state or '1' state.
- The information is processed by digital logic gates.
- Quantum computing uses a basic unit of information known as **qubit**. It is acronym for **quantum bit**.
- Quantum mechanics predicts that if a system can exist in two distinguishable states say 0 and 1, it can also exist in states which are coherent superposition of the two distinguishable states.
- A qubit can exist in state 0, state 1 or both 0 and 1 simultaneously in some proportion.
- A classical 3-bit register can store 8 numbers in one of its 8 possible configurations. 000, 001, 010, 111, which represent numbers from 0 to 7. It is in one of these states at an instant.
- A quantum 3-bit register consisting of 3 qubits stores these 8 numbers simultaneously. The 8 different numbers are physically present in the register simultaneously.
- A register made of n qubits is capable of storing 2^n numbers simultaneously. Hence it is possible to perform mathematical operations on all 2^n numbers simultaneously.
- This will greatly enhance the computing speed.
- A qubit can be an atom. A register of 250 atoms is capable of storing more numbers simultaneously than the estimated number of atoms in the universe.
- The quantum computer is made of qubits to store information which is processed by quantum logic gates.
- Quantum computers have the potential to increase computing power exponentially.

END... ✍

7**Semiconductor Physics****7.1 : Free Electron Theory**

Q.1 State the assumption in classical free electron theory.

Ans. :

Assumptions in classical free electron theory

- 1) The metal atoms have a core, which consists of a nucleus surrounded by the inner electrons and the valence electrons. The positive ion core along with the valence electrons is electrically neutral. The valence electrons are free to move throughout the volume of the sample.
- 2) The electrostatic forces of attraction between the free electrons and the ion cores are negligible.
- 3) The electrostatic forces of repulsion amongst the free electrons are negligible.
- 4) The electrons cannot escape from the metal due to potential barrier at the surface. Inside the metal the potential is constant.
- 5) The free electrons are equivalent to gas molecules and hence the kinetic theory of gases is applicable to them. In absence of electric field, they have random thermal motion. Their energies are distributed according to the Maxwell-Boltzmann distribution.

Q.2 Define (i) drift velocity, (ii) mean free path, (iii) relaxation time.

Ans. : (i) drift velocity : The electrons do not move in a straight line opposite to the electric field due to collisions with ion cores. They move in a zig-zag path with a small average velocity opposite to the electric field which is known as the **drift velocity**.

(ii) **mean free path** : The average time between two collisions is known as **mean collision time** and the average distance covered by the electrons between two collisions is known as **mean free path**.

(iii) **relaxation time** : When applied electric field is turned off, the drift velocity decreases and falls off to zero exponentially. The time required by the drift velocity to decrease to $\left(\frac{1}{e}\right)$ times the initial value is known as the **relaxation time**.

Q.3 List the successes and failures of classical free electron theory.

Ans. : Success of Classical Free Electron Theory

- 1) The classical free electron theory is able to explain the electrical and thermal conductivity of metals.
- 2) Ohm's law can be derived using classical free electron theory.
- 3) Optical properties of metals can be explained on the basis of this theory.

Failure of Classical Free Electron Theory

- 1) The classical free electron theory predicts that the resistivity is directly proportional to square root of the absolute temperature. However, experimental evidence shows that the resistivity is directly proportional to the absolute temperature.
- 2) According to classical theory, the free electron gas should contribute to the molar specific heat at constant volume of metal an amount equal to

$$C_V = \frac{3}{2} R$$

Experiments show that the contribution of free electrons to the molar specific heat at constant volume of any metal is much smaller ($C_V = 10^{-4} RT$). Also, the contribution of free electrons is found to be temperature dependent which is not predicted by the classical free electron theory.

- 3) According to classical theory, the mean free path must be of the order of the interatomic spacing in the crystal. However, calculations from various experiments show that the mean free

path is many interatomic spacings and it also depends on temperature. As the temperature decreases, the mean free path increases.

- 4) The classical free electron theory predicts larger conductivity for divalent and trivalent atoms like zinc and aluminium compared to monovalent atoms like copper and silver as it is based on the assumption that the valence electrons take part in conduction. This is contrary to observations that copper and silver are better conductors than zinc and aluminium.
- 5) The classical free electron theory predicts that the magnetic susceptibility of metals to be inversely proportional to temperature whereas experimentally it is established that the susceptibility is independent of temperature.

7.2 : Kronig-Penney Model

Q.4 Explain the Kronig-Penney model. Describe the concept of allowed and forbidden energy bands in a single crystal qualitatively from the result of Kronig-Penney model.

Ans. : • Kronig and Penney considered the electrons to be moving in a variable potential region in the crystal instead of being free.

- The potential was approximated by a square well periodic potential as shown in Fig. Q.4.1.

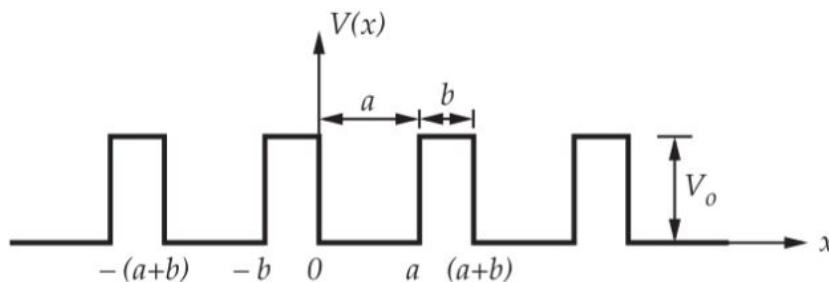


Fig. Q.4.1

- The time independent Schrodinger wave equation in one dimension is,

$$\frac{d^2\psi}{dx^2} + \frac{2m}{\hbar^2}(E - V)\psi = 0$$

or
$$\frac{\hbar^2}{2m} \frac{d^2 \psi}{dx^2} + (E - V)\psi = 0$$

- In region $0 < x < a$, where $v = 0$, the general solution for wave equation is,

$$\psi_1 = Ae^{iKx} + Be^{-iKx} \quad \dots (1)$$

and the energy is,

$$E = \frac{\hbar^2 K^2}{2m} \quad \dots (2)$$

- In the region $-b < x < 0$, $V = V_0$. The solution of wave equation is,

$$\psi_2 = Ce^{Qx} + De^{-Qx} \quad \dots (3)$$

- The continuity of wave function at $x = 0$ requires that the values of ψ_1 and ψ_2 be equal at this point.

$$\psi_1|_{x=0} = \psi_2|_{x=0}$$

$$\therefore A + B = C + D \quad \dots (4)$$

- $\frac{d\psi}{dx}$ is also continuous at $x = 0$

$$\therefore \left. \frac{d\psi_1}{dx} \right|_{x=0} = \left. \frac{d\psi_2}{dx} \right|_{x=0}$$

$$\therefore iK(A - B) = Q(C - D) \quad \dots (5)$$

- By Bloch theorem,

$$\psi(a < x < a + b) = \psi(-b < x < 0)e^{ik(a+b)}$$

- where k is the wave vector.

- The condition for continuity of ψ at $x = a$ with Bloch theorem is

$$\begin{aligned} \psi_1|_{x=a} &= \psi_2|_{x=-b} e^{ik(a+b)} \\ \therefore Ae^{iKa} + Be^{-iKa} &= (Ce^{-Qb} + De^{Qb})e^{ik(a+b)} \end{aligned} \quad \dots (6)$$

- For continuity of $\frac{d\psi}{dx}$ at $x = a$,

$$\begin{aligned} \left. \frac{d\psi_1}{dx} \right|_{x=a} &= \left. \frac{d\psi_2}{dx} \right|_{x=-b} \cdot e^{ik(a+b)} \\ \therefore iK(Ae^{iKa} - Be^{-iKa}) &= Q(Ce^{-Qb} - De^{Qb})e^{ik(a+b)} \end{aligned} \quad \dots (7)$$

- Equation (4), (5), (6) and (7) have solutions only if the determinant of coefficients of A, B, C and D vanishes. This leads to the condition.

$$\frac{P}{Ka} \sin Ka + \cos Ka = \cos ka \quad \dots(8)$$

where
$$P = \frac{Q^2 ba}{2}$$

- The R.H.S. of equation (8) is $\cos ka$ which lies between -1 and $+1$. Hence solutions are obtained only when the L.H.S lies between -1 and $+1$.
- The graph of $\frac{P}{Ka} \sin Ka + \cos Ka$ plotted for different values of Ka is shown in Fig. Q.4.2.
- In regions of the graph where the value of the function is either greater than 1 or less than 1, solutions for ψ do not exist.
- The corresponding energies which are forbidden can be obtained using equation (2).

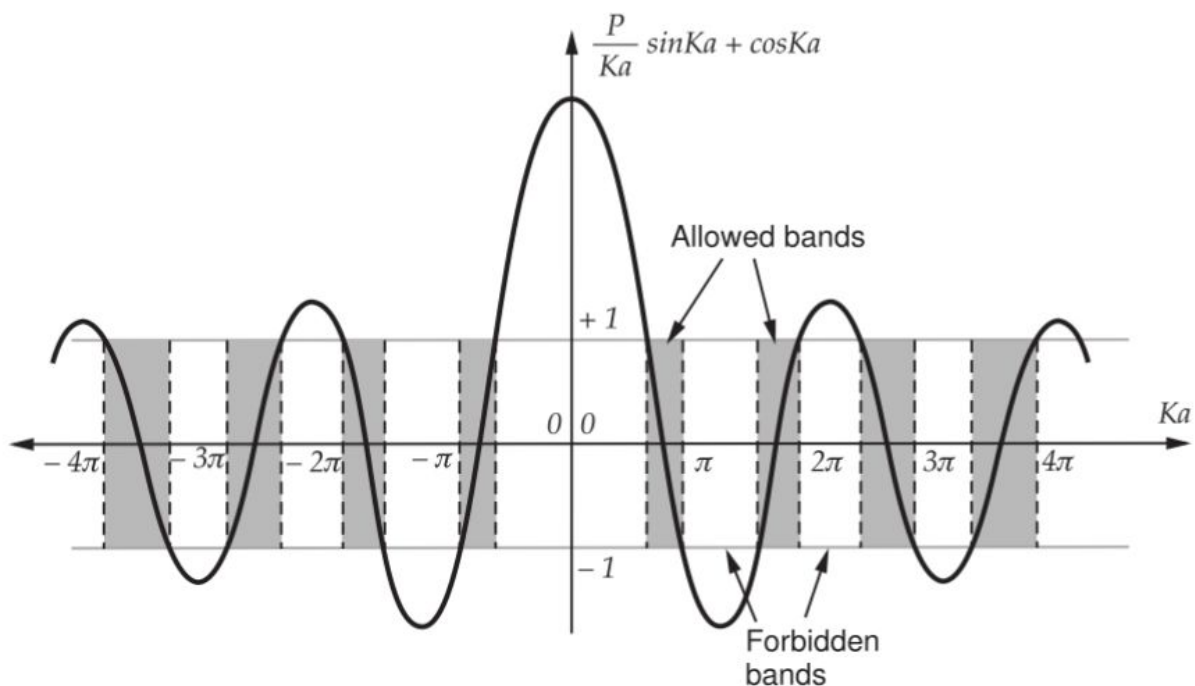


Fig. Q.4.2

- Thus, there are bands of allowed energies separated by energies which are not allowed and hence known as forbidden bands.
- The graph of energy E for different wave vectors k is shown in Fig. Q.4.3. There are discontinuities at $k = \pm \frac{\pi}{a}, \pm \frac{2\pi}{a}, \dots$ which correspond to the condition that $\left| \frac{P}{Ka} \sin Ka + \cos Ka \right| > 1$.
- Thus according to Kronig-Penney model, the motion of electrons in a periodic potential in crystals gives rise to certain allowed energy bands separated by forbidden energy bands.

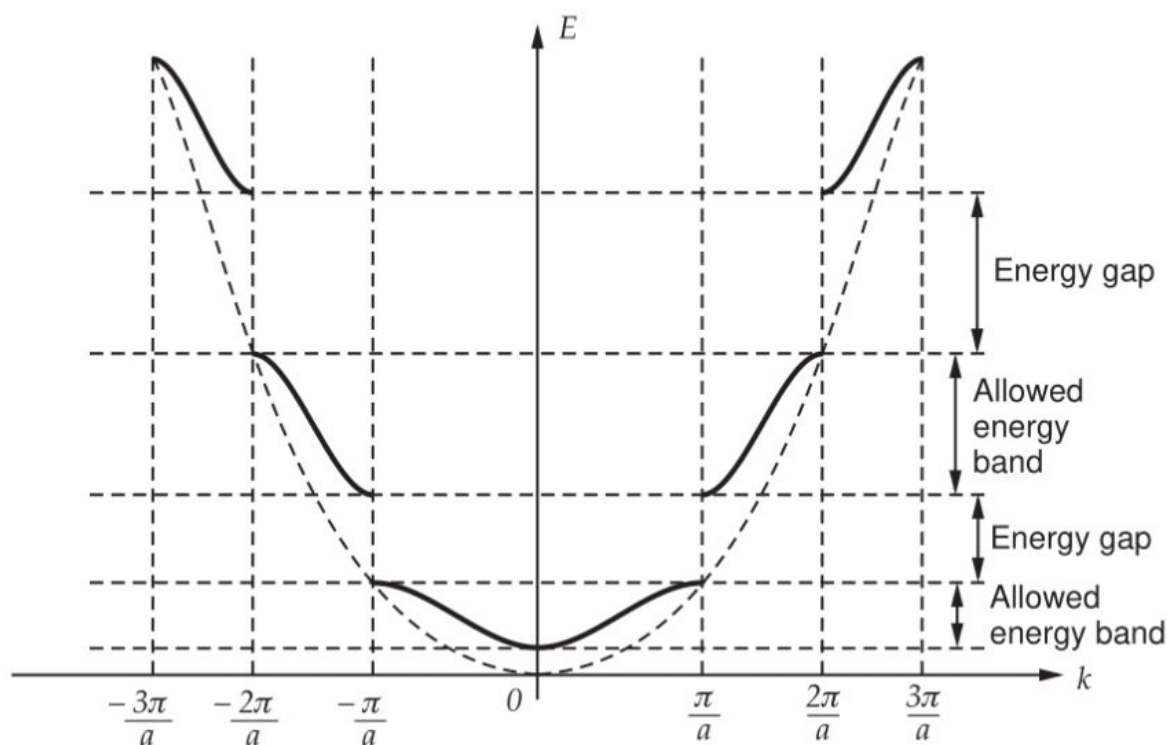


Fig. Q.4.3

7.3 : Band Theory of Solids

Q.5 Explain Classification of solids on the basic of band theory.

Ans. : Solids can be classified into conductors, insulators and semiconductors based on their energy band structure.

- 1) Conductors :** • In conductors, the valence band and the conduction band overlap. There is no forbidden band.

- The electrons can be made to move and constitute a current by applying a small potential difference.
- The resistivity of conductors is very low and increases with temperature. Hence the conductors are said to have a positive temperature coefficient of resistance.
- The energy band structure is shown in Fig. Q.5.1.
- Metals like copper, silver, gold, aluminium etc. are good conductors of electricity.

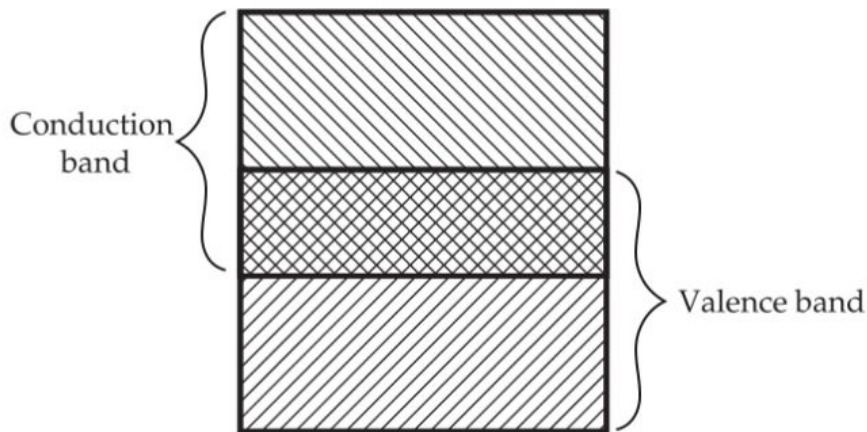


Fig. Q.5.1

2) Insulators : • Insulators have a completely filled valence band and an empty conduction band which are separated by a large forbidden band.

- The band gap energy is large (of the order of 5 eV). Hence large amount of energy is required to transfer electrons from valence band to conduction band.
- The insulators have very low conductivity and high resistivity. Diamond, wood, glass etc., are insulators.

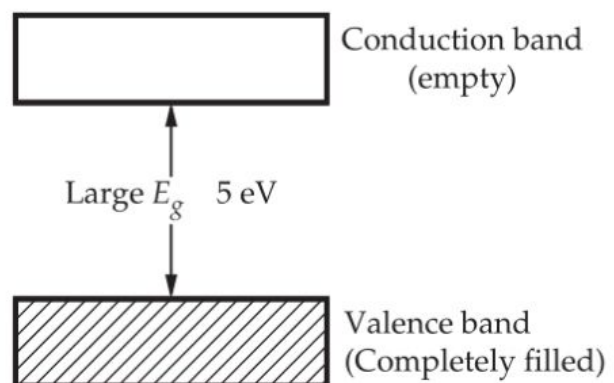


Fig. Q.5.2

- The energy band structure is shown in Fig. Q.5.2.

- 3) **Semiconductors** : • In semiconductors, the valence band is completely filled and the conduction band is empty at absolute zero temperature.
- The valence band and conduction band are separated by a small forbidden band of the order of 1 eV.
 - Hence, compared to insulators, smaller energy is required to transfer the electrons from valence band to conduction band. Hence the conductivity is better than insulators but not as good as the conductors.
 - Silicon and germanium are semiconductors having band gap energies of 1.1 eV and 0.7 eV respectively.
 - Some compounds formed between group III and group V elements like gallium arsenide (GaAs) are also semiconductors.
 - The energy band structure is shown in Fig. Q.5.3.

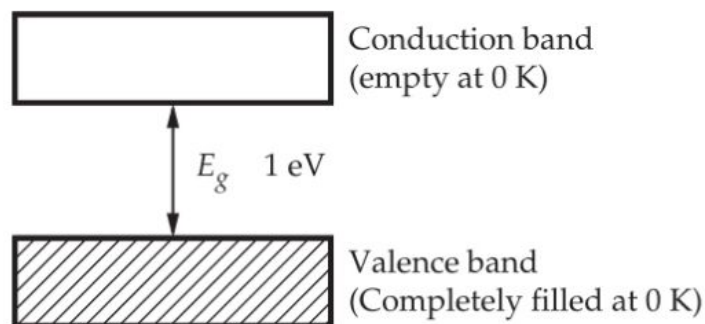


Fig. Q.5.3

- As temperature is increased, electrons from valence band jump to conduction band leaving a vacancy in valence band which is known as hole.
- The free electrons in conduction band and the holes in valence band take part in conduction.
- Hence conductivity increases and resistivity decreases with increase in temperature. The semiconductors are said to have a **negative temperature coefficient**.

Q.6 Calculate the band gap energy in silicon given that it is transparent to radiation of wavelength greater than 11000 Å°

☞ [SPPU : May-07, Dec.-17, 18, Marks 3]

Ans. : Given data : $h = 6.63 \times 10^{-34} \text{ J - s}$
 $c = 3 \times 10^8 \text{ m/s}$
 $\lambda = 11000 \text{ Å}^\circ = 11000 \times 10^{-10} \text{ m}$

Formula : $E_g = \frac{hc}{\lambda}$

$$\therefore E_g = \frac{6.63 \times 10^{-34} \times 3 \times 10^8}{11000 \times 10^{-10}}$$

$$= 1.8082 \times 10^{-19} \text{ J} = \frac{1.8082 \times 10^{-19}}{1.6 \times 10^{-19}} \text{ eV}$$

$\therefore$ $E_g = 1.13 \text{ eV}$

Q.7 Calculate the wavelength at which germanium starts to absorb light. The energy gap in germanium is 0.7 eV.

Ans. : Given data : $h = 6.63 \times 10^{-34} \text{ J - s}$
 $c = 3 \times 10^8 \text{ m/s}$
 $E_g = 0.7 \text{ eV} = 0.7 \times 1.6 \times 10^{-19} \text{ J}$

Formula : $E_g = \frac{hc}{\lambda}$

$\therefore \lambda = \frac{hc}{E_g}$

$$\therefore \lambda = \frac{6.63 \times 10^{-34} \times 3 \times 10^8}{0.7 \times 1.6 \times 10^{-19}} = 1.776 \times 10^{-6} \text{ m}$$

$\therefore$ $\lambda = 17760 \text{ Å}^\circ$

Q.8 Calculate the band gap energy in Germanium. Given that it is transparent to radiation of wavelength greater than 17760 Å°.

☞ [SPPU : May-10]

Ans. :

Given data :

$$h = 6.63 \times 10^{-34} \text{ Js}$$

$$c = 3 \times 10^8 \text{ m/s}$$

$$\lambda = 17760 \text{ \AA} = 17760 \times 10^{-10} \text{ m}$$

Formula :

$$E_g = \frac{hc}{\lambda}$$

$$E_g = \frac{6.63 \times 10^{-34} \times 3 \times 10^8}{17760 \times 10^{-10}}$$

$$= 1.12 \times 10^{-19} \text{ J} = \frac{1.12 \times 10^{-19}}{1.6 \times 10^{-19}} \text{ eV}$$

$\therefore$

$$E_g = 0.7 \text{ eV}$$

7.4 : Effective Mass of an Electron

Q.9 Derive an expression for effective mass of an electron. How is it used to describe motion of a hole ? Also find effective mass of a free electron.

Ans. : • An electron in a crystal is not free. When an external field is applied, the electron in a crystal behaves as if it had a mass different from its actual mass.

- Consider an electron described as a wave packet having wave function in the region of wave vector k .
- Let the electron be in a crystal to which an electric field $\mathcal{E}$ is applied. The group velocity of the wave packet will be

$$v_g = \frac{d\omega}{dk}$$

- If E is the energy of the wave packet,

$$E = h\nu = \frac{h}{2\pi} \cdot 2\pi\nu$$

$\therefore$

$$E = \hbar\omega$$

$\therefore$

$$\omega = \frac{E}{\hbar}$$

$$v_g = \frac{d\omega}{dk}$$

$$\therefore v_g = \frac{1}{\hbar} \frac{dE}{dk} \quad \dots (1)$$

$$\frac{dv_g}{dt} = \frac{1}{\hbar} \frac{d^2E}{dk dt}$$

$$\therefore \frac{dv_g}{dt} = \frac{1}{\hbar} \frac{d^2E}{dk^2} \frac{dk}{dt} \quad \dots (2)$$

- The work done dE by the electric field $\mathcal{E}$ in a time interval dt is

$$dE = -e\mathcal{E} v_g dt \quad \dots (3)$$

- (The force on the electron is $-e\mathcal{E}$ and the displacement is $v_g dt$)

$$\bullet \text{ As } dE = \frac{dE}{dk} \cdot dk$$

$$\text{and } E = \hbar v_g \quad \text{from equation (1)}$$

$$dE = \hbar v_g dk \quad \dots (4)$$

- From equations (3) and (4),

$$\hbar dk = -e\mathcal{E} dt$$

$$\therefore -e\mathcal{E} = \hbar \frac{dk}{dt} \quad \dots (5)$$

- The above equation describes the force $-e\mathcal{E}$ due to an external field $\mathcal{E}$ on an electron in terms of the rate of change of wave vector k . Hence we can write

$$F = \hbar \frac{dk}{dt} \quad \dots (6)$$

$$\therefore \frac{dk}{dt} = \frac{F}{\hbar}$$

- Substituting in equation (2)

$$\frac{dv_g}{dt} = \frac{1}{\hbar} \frac{d^2E}{dk^2} \cdot \frac{F}{\hbar}$$

$$\therefore F = \frac{\hbar^2}{\left(\frac{d^2E}{dk^2}\right)} \frac{dv_g}{dt}$$

- As $\frac{dv_g}{dt}$ has dimensions of acceleration, the quantity $\frac{\hbar^2}{\left(\frac{d^2 E}{dk^2}\right)}$ is

defined as the effective mass (m^*) of an electron.

$$\therefore m^* = \frac{\hbar^2}{\left(\frac{d^2 E}{dk^2}\right)} \quad \dots (7)$$

- Thus the curvature $\left(\frac{d^2 E}{dk^2}\right)$ of the energy band decides the effective mass of an electron in a crystal.
- The curvature $\frac{d^2 E}{dk^2}$ is negative for an electron at the top of the valence band and positive at the bottom of conduction band as shown in Fig. Q.9.1.
- Hence the effective mass of an electron is negative near the top of valence band and positive near the bottom of conduction band.

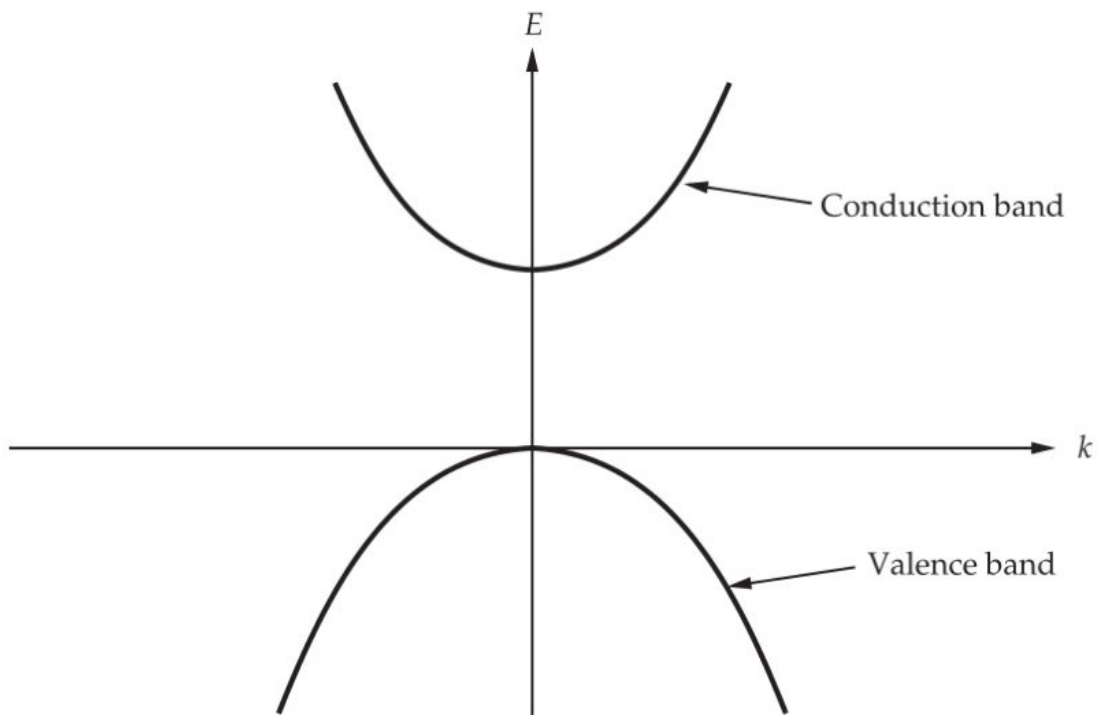


Fig. Q.9.1

- The motion of valence band electrons with negative charge and negative mass can be equivalently described by motion of holes having positive charge and positive effective mass in same direction.
- For a free electron,

$$E = \frac{P^2}{2m}$$

$$P = \frac{h}{\lambda} = \frac{h}{2\pi} \frac{2\pi}{\lambda}$$

$$\therefore P = \hbar k$$

$$\therefore E = \frac{\hbar^2 k^2}{2m}$$

$$\frac{d^2 E}{dk^2} = \frac{\hbar^2}{m}$$

From equation (7),

$$m^* = m$$

i.e. the effective mass is same as its mass for a free electron.

7.5 : Density of States

Q.10 Derive an expression for density of states for free electrons in metals.

Ans. : • The conduction band electrons in metals are treated as free electrons in the free electron gas model which move in three dimensions within the boundary of the specimen.

- As the electrons are considered as free electrons within the specimen, their potential energy can be taken as zero inside the specimen which we will consider to be a cube of side L .
- The time independent Schrodinger wave equation in three dimensions with $V = 0$ becomes,

$$\nabla^2 \psi + \frac{8\pi^2 m}{h^2} E \psi = 0 \quad \dots (1)$$

$$-\frac{h^2}{8\pi^2 m} \nabla^2 \psi = E \psi$$

$$\therefore -\frac{h^2}{8\pi^2m}\left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} + \frac{\partial^2}{\partial z^2}\right)\psi = E\psi \quad \dots (2)$$

- The solution of above equation i.e. of the form

$$\psi = A e^{i\vec{K} \cdot \vec{r}} \quad \dots (3)$$

- The wavefunction ψ has to be periodic in x , y and z with period L i.e.,

$$\psi(x+L, y, z) = \psi(x, y, z),$$

$$\psi(x, y+L, z) = \psi(x, y, z) \text{ and}$$

$$\psi(x, y, z+L) = \psi(x, y, z)$$

- These conditions are satisfied only if the components of wave vector k_x, k_y, k_z take values $0, \pm \frac{2\pi}{L}, \pm \frac{4\pi}{L}, \dots$ etc.

- Hence the components of k must be of the form $\frac{2n\pi}{L}$.

$$\therefore k_x = \frac{2n_x\pi}{L}, \quad k_y = \frac{2n_y\pi}{L} \quad \text{and} \quad k_z = \frac{2n_z\pi}{L}$$

where n_x, n_y and n_z are integers

- From equation (3)

$$\psi = A e^{i(k_x x + k_y y + k_z z)} \quad \dots (4)$$

$$[\text{as } \vec{k} = k_x \hat{i} + k_y \hat{j} + k_z \hat{k} \text{ and } \vec{r} = x\hat{i} + y\hat{j} + z\hat{k}]$$

$$\frac{\partial^2 \psi}{\partial x^2} = -A k_x^2 e^{i(k_x x + k_y y + k_z z)}$$

$$\frac{\partial^2 \psi}{\partial y^2} = -A k_y^2 e^{i(k_x x + k_y y + k_z z)}$$

$$\frac{\partial^2 \psi}{\partial z^2} = -A k_z^2 e^{i(k_x x + k_y y + k_z z)}$$

Substituting in equation (2),

$$\left(\frac{-h^2}{8\pi^2 m} \right) \left[-A(k_x^2 + k_y^2 + k_z^2) e^{i(k_x x + k_y y + k_z z)} \right] = EA e^{i(k_x x + k_y y + k_z z)}$$

$$\therefore \frac{h^2}{8\pi^2 m} (k_x^2 + k_y^2 + k_z^2) = E$$

$$\therefore E = \frac{h^2}{8\pi^2 m} \left[\left(\frac{2\pi n_x}{L} \right)^2 + \left(\frac{2\pi n_y}{L} \right)^2 + \left(\frac{2\pi n_z}{L} \right)^2 \right]$$

$$\therefore E = \frac{h^2}{8\pi^2 m} \times \frac{4\pi^2}{L^2} (n_x^2 + n_y^2 + n_z^2)$$

- Let $n_x^2 + n_y^2 + n_z^2 = n^2$ then,

$$E = \frac{h^2 n^2}{2mL^2} \quad \dots (5)$$

- The equation $n_x^2 + n_y^2 + n_z^2 = n^2$ represents a sphere in n -space with radius n . Hence the number of allowed energy states per unit volume can be obtained by using the volume of this sphere in n -space.
- As each energy level corresponding to a unique set of values of n_x , n_y and n_z can accommodate two electrons according to Pauli's exclusion principle, the total number of allowed states will be $2 \times \left(\frac{4}{3} \pi n^3 \right)$
- If N is the number of energy states per unit volume,

$$N \cdot L^3 = 2 \times \left(\frac{4}{3} \pi n^3 \right)$$

$$\therefore n^2 = \left(\frac{3NL^3}{8\pi} \right)^{2/3} \quad \dots (6)$$

Substituting in equation (5) we get,

$$E = \frac{h^2}{2mL^2} \left(\frac{3NL^3}{8\pi} \right)^{2/3}$$

$$\therefore E = \frac{h^2}{2m} \left(\frac{3N}{8\pi} \right)^{2/3}$$

$$\therefore N = \left(\frac{2mE}{h^2} \right)^{3/2} \times \frac{8\pi}{3} = \frac{8\pi}{3} \times \frac{2\sqrt{2} m^{3/2} E^{3/2}}{h^2}$$

$$\therefore N = \frac{16\sqrt{2} \pi m^{3/2} E^{3/2}}{3h^3} \quad \dots (7)$$

- The density of states, $g(E)dE$, which is the number of allowed energy states in the energy range E and $E+dE$, is obtained by differentiating equation (7) w.r.t. E .

$$g(E) dE = \frac{dN}{dE} dE = \frac{16\sqrt{2} \pi m^{3/2}}{3h^3} \times \frac{3}{2} E^{\frac{1}{2}} dE$$

$$\therefore g(E) dE = \frac{8\sqrt{2} \pi m^{3/2}}{h^3} \sqrt{E} dE \quad \dots (8)$$

7.6 : Fermi-Function and Fermi-Level

Q.11 Explain Fermi-Dirac distribution function specifying the meaning of each term in it. [SPPU : May - 14, Dec - 14, Marks 3]

Ans. : The Fermi-Dirac probability distribution function, also known as Fermi function, is

$$P(E) = \frac{1}{1 + e^{(E-E_F)/kT}}$$

where

$P(E)$ = Probability of an electron occupying the energy state E

E_F = Fermi energy

k = Boltzmann constant

and T = Absolute temperature

Q.12 Explain Fermi energy and Fermi level. Show the variation of Fermi function with energy at 0 K and at a higher temperature.

☞ [SPPU : May - 15, Marks 3]

Ans. : The Fermi-Dirac probability distribution function, also known as Fermi function, is

$$P(E) = \frac{1}{1 + e^{(E-E_F)/kT}}$$

where

$P(E)$ = Probability of an electron occupying the energy state E

E_F = Fermi energy

k = Boltzmann constant

and T = Absolute temperature

for $T = 0$ K, if $E > E_F$

$$P(E) = \frac{1}{1 + e^{\infty}} = \frac{1}{1 + \infty}$$

$$\therefore P(E) = 0$$

i.e. no electron can have energy greater than the Fermi energy at 0 K. It means that all energy states above the Fermi energy are empty at 0 K.

for $T = 0$ K, if $E < E_F$,

$$P(E) = \frac{1}{1 + e^{-\infty}} = \frac{1}{1 + 0}$$

$$\therefore P(E) = 1$$

i.e., all electrons occupy energy states below the Fermi energy at 0 K.

- Thus, all energy states below Fermi energy are filled and energy states above Fermi energy are empty at 0 K. Hence Fermi energy as the highest occupied energy state at 0 K.

for $T > 0$ K, if $E = E_F$,

$$P(E_F) = \frac{1}{1 + e^0} = \frac{1}{1 + 1}$$

$$\therefore P(E_F) = \frac{1}{2}$$

i.e, the Fermi energy level represents the energy state with a 50 % probability of being filled if forbidden gap does not exist as in the case of good conductors.

- The Fermi function is shown for different temperatures in Fig. Q.12.1.

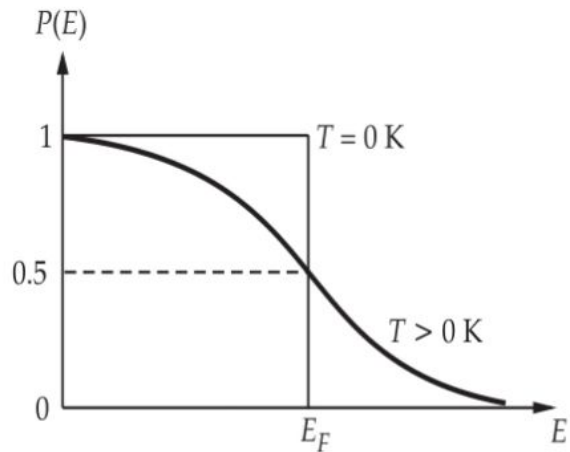


Fig. Q.12.1

Important Formula

$$P(E) = \frac{1}{1 + e^{(E-E_F)/kT}}$$

Q.13 Find the temperature at which there is 1.0 % probability that a state with an energy 0.5 eV above Fermi energy will be occupied.

Ans. : The Fermi distribution function is

$$P(E) = \frac{1}{1 + e^{(E-E_F)/kT}}$$

$$P(E) = 1.0 \% = 0.01$$

$$E - E_F = 0.5 \text{ eV} = 0.5 \times 1.6 \times 10^{-19} \text{ J}$$

$$\therefore E - E_F = 8 \times 10^{-20} \text{ J}$$

$$k = 1.38 \times 10^{-23} \text{ J/K}$$

$$\therefore 0.01 = \frac{1}{1 + e^{\left(\frac{8 \times 10^{-20}}{1.38 \times 10^{-23} T} \right)}}$$

$$1 + e^{\left(\frac{5797.1}{T} \right)} = 100$$

$$e^{\left(\frac{5797.1}{T} \right)} = 99$$

$$\frac{5797.1}{T} = 4.595$$

∴

$$T = 1261.6 \text{ K}$$

Q.14 Show that if the probability of occupancy is x at an energy level ΔE below the Fermi level, then x is also probability of non-occupancy at an energy level ΔE above the Fermi level.

Ans. : The Fermi distribution function is

$$P(E) = \frac{1}{1 + e^{(E - E_F)/kT}}$$

For $E - E_F = -\Delta E$, $P(E) = x$

∴ $x = \frac{1}{1 + e^{-\Delta E/kT}} \quad \dots (1)$

For $E - E_F = \Delta E$,

$$P(E + \Delta E) = \frac{1}{1 + e^{\Delta E/kT}}$$

- $P(E + \Delta E)$ is the probability of occupancy of energy level ΔE above the Fermi level.
- ∴ The probability of non-occupancy of energy level ΔE above the Fermi level is

$$\begin{aligned} 1 - P(E + \Delta E) &= 1 - \frac{1}{1 + e^{\Delta E/kT}} \\ &= \frac{1 + e^{\Delta E/kT} - 1}{1 + e^{\Delta E/kT}} = \frac{e^{\Delta E/kT}}{1 + e^{\Delta E/kT}} \\ &= \frac{1}{e^{-\Delta E/kT} + 1} \quad (\text{dividing numerator and} \end{aligned}$$

denominator by $e^{\Delta E/kT}$)

$$1 - P(E + \Delta E) = x$$

Q.15 Find the probability with which an energy level 0.02 eV below Fermi level will be occupied at room temperature of 300 K and at 1000 K.

Ans. : The Fermi distribution function is

$$P(E) = \frac{1}{1 + e^{(E-E_F)/kT}}$$

$$E - E_F = -0.02 \text{ eV}$$

$$k = 1.38 \times 10^{-23} \text{ J/K} = 8.625 \times 10^{-5} \text{ eV/K}$$

For

$$T = 300 \text{ K}$$

$$P(E) = \frac{1}{1 + e^{\left(\frac{-0.02}{8.625 \times 10^{-5} \times 300}\right)}}$$

$\therefore$

$$P(E) = 0.684$$

For

$$T = 1000 \text{ K}$$

$$P(E) = \frac{1}{1 + e^{\left(\frac{-0.02}{8.625 \times 10^{-5} \times 1000}\right)}}$$

$\therefore$

$$P(E) = 0.56$$

Note : It is clear from these values that the probability of occupancy of energy levels below Fermi level decreases on increasing the temperature.

Q.16 Calculate the probability of an electron occupying an energy level 0.02 eV above the Fermi level at 200 K and 400 K in a material.

Ans. : The Fermi distribution function is

$$P(E) = \frac{1}{1 + e^{(E-E_F)/kT}}$$

$$E - E_F = 0.02 \text{ eV}$$

$$k = 1.38 \times 10^{-23} \text{ J / K}$$

$$= 8.625 \times 10^{-5} \text{ eV / K}$$

For

$$T = 200 \text{ K,}$$

$$P(E) = \frac{1}{1 + e^{\left(\frac{0.02}{8.625 \times 10^{-5} \times 200}\right)}}$$

∴

$$P(E) = 0.239$$

For

$$T = 400 \text{ K}$$

$$P(E) = \frac{1}{1 + e^{\left(\frac{0.02}{8.625 \times 10^{-5} \times 400} \right)}}$$

∴

$$P(E) = 0.359$$

Note : The probability of occupancy of energy levels above Fermi level increases on increasing the temperature.

Q.17 The Fermi level in potassium is 2.1 eV. What are the energies for which the probabilities of occupancy at 300 K are 0.99, 0.01 and 0.5 ?

Ans. : The Fermi distribution function is

$$P(E) = \frac{1}{1 + e^{(E-E_F)/kT}}$$

$$1 + e^{(E-E_F)/kT} = \frac{1}{P(E)}$$

$$e^{(E-E_F)/kT} = \frac{1}{P(E)} - 1$$

$$\frac{E-E_F}{kT} = \ln \left[\frac{1}{P(E)} - 1 \right]$$

∴

$$E = E_F + kT \ln \left[\frac{1}{P(E)} - 1 \right]$$

$$E_F = 2.1 \text{ eV}$$

$$k = 1.38 \times 10^{-23} \text{ J / K} = 8.625 \times 10^{-5} \text{ eV / K}$$

$$T = 300 \text{ K}$$

For

$$P(E) = 0.99$$

$$E = 2.1 + 8.625 \times 10^{-5} \times 300 \ln \left[\frac{1}{0.99} - 1 \right]$$

∴

$$E = 1.981 \text{ eV}$$

For

$$P(E) = 0.01$$

$$E = 2.1 + 8.625 \times 10^{-5} \times 300 \ln \left[\frac{1}{0.01} - 1 \right]$$

∴

$$E = 2.219 \text{ eV}$$

For

$$P(E) = 0.5$$

$$E = 2.1 + 8.625 \times 10^{-5} \times 300 \ln \left[\frac{1}{0.5} - 1 \right]$$

∴

$$E = 2.1 \text{ eV}$$

7.7 : Conductivity of Conductor

Q.18 Derive expressions for conductivity and current in a conductor.

Ans. : • **Resistivity** or specific resistance is defined as the resistance of a conductor of unit length and unit cross-section area. It is related to the resistance 'R' by the following expression.

$$R = \rho \frac{l}{a} \quad \dots (1)$$

where

ρ = Resistivity

l = Length of conductor and

a = Area of cross-section

• Conductivity is defined as the reciprocal of resistivity. i.e.,

$$\text{Conductivity } \sigma = \frac{1}{\rho}$$

• By ohm's law,

$$V = IR$$

∴

$$I = \frac{V}{R}$$

• Substituting from equation (1),

$$I = \left(\frac{V}{\rho \frac{l}{a}} \right) = \frac{V}{l} \times \frac{a}{\rho}$$

- The current density 'J' is defined as the current flowing per unit cross section area.

$$\therefore J = \frac{I}{a} = \frac{V}{l} \cdot \frac{1}{\rho}$$

- As $\frac{V}{l} = E$, the electric field and

$$\frac{1}{\rho} = \sigma, \text{ the conductivity,}$$

$$J = \sigma E \quad \dots (2)$$

- Current density is also defined as the amount of charge that flows through unit cross section area per unit time.
- Consider a conductor of unit cross section area and length ' v_d ' where ' v_d ' is the drift velocity of the electrons.

Let n = Number of electrons per unit volume

and e = Charge of an electron

Then the distance travelled by electrons in 1 s = $v_d \times 1 = v_d$

- As electrons travel distance v_d in 1 s, all electrons within a distance ' v_d ' from the unit cross-section area shown in Fig. Q.18.1 will cross the area.

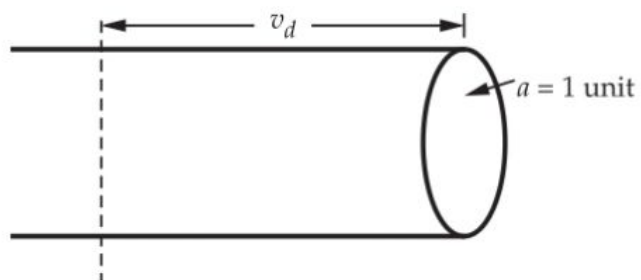


Fig. Q.18.1

$\therefore$ The volume of the conductor from which all electrons will cross the unit area = $v_d \times a = v_d$ (as $a = 1 \text{ unit}$)

$\therefore$ Number of electrons that cross unit area in 1 s = $n v_d$

$\therefore$ Amount of charge that flows through the unit

$$\text{area in } 1 \text{ s} = J = n e v_d \quad \dots (3)$$

- From equations (2) and (3),

$$\sigma E = n e v_d$$

$$\therefore \sigma = n e \frac{v_d}{E} \quad \dots (4)$$

- For the same electric field the charges which acquire larger drift velocity are said to be more mobile. Hence the quantity $\frac{v_d}{E}$ is a measure of mobility of charge carriers.

$$\therefore \text{Mobility } \mu = \frac{v_d}{E} \quad \dots (5)$$

$\therefore$ From equation (4)

$$\sigma = n e \mu \quad \dots (6)$$

- An equation for current can be obtained from equation (3). As

$$J = \frac{I}{a},$$

$$I = J \cdot a$$

$$\therefore I = n e a v_d \quad \dots (7)$$

Important Formulae

$$I = n e a v_d$$

$$\sigma = n e \mu$$

7.8 : Conductivity in a Semiconductor

Q.19 Derive an expression for conductivity in semiconductor.

 [SPPU : Dec - 12, May - 11, Marks 6]

OR Derive the expression for the conductivity of intrinsic and extrinsic semiconductor.

 [SPPU : May - 14, Marks 6]

Ans. : • In a semiconductor, the current is due to free electrons as well as holes.

- The current due to electrons can be written as,

$$I_e = n_e e a v_e \quad \dots (1)$$

where

v_e = Drift velocity of electrons

n_e = Number density of electrons

- Similarly the current due to holes is

$$I_h = n_h e a v_h \quad \dots (2)$$

where

v_h = Drift velocity of holes

and

n_h = Number density of holes

- The total current is

$$I = I_e + I_h$$

$$\therefore I = e a (n_e v_e + n_h v_h)$$

- The current density $J = \frac{I}{a}$

$$\therefore J = e (n_e v_e + n_h v_h) \quad \dots (3)$$

- Also,

$$J = \sigma E$$

$$\therefore \sigma E = e (n_e v_e + n_h v_h)$$

$$\sigma = e \left(n_e \frac{v_e}{E} + n_h \frac{v_h}{E} \right)$$

$$\frac{v_e}{E} = \mu_e, \text{ the mobility of electrons}$$

and $\frac{v_h}{E} = \mu_h, \text{ the mobility of holes.}$

$$\therefore \sigma = e (n_e \mu_e + n_h \mu_h) \quad \dots (4)$$

- For intrinsic semiconductors, $n_e = n_h = n_i$ where n_i is called the density of intrinsic charge carriers.

$$\therefore \sigma = n_i e (\mu_e + \mu_h) \quad \dots (5)$$

- For n -type semiconductors, $n_e \gg n_h$

$\therefore$ From equation (4),

$$\sigma \approx n_e e \mu_e \quad \dots (6)$$

- As each donor atom contributes one free electron, n_e is also the density of donor impurity atoms.

- For p -type semiconductors, $n_h \gg n_e$

$$\therefore \sigma \approx n_h e \mu_h \quad \dots (7)$$

where n_h is the density of holes which is same as the density of acceptor impurity atoms.

- The current due to motion of electrons and holes in a semiconductor under the action of an externally applied electric field is known as drift current.
- In semiconductors, another type of current can flow when there is difference in density of charge carriers. This current which is due to density difference of charge carriers is known as diffusion current.

Important Formulae

For intrinsic semiconductors, conductivity $\sigma = n_i e (\mu_e + \mu_h)$

For n -type semiconductors, conductivity $\sigma \approx n_e e \mu_e$

For p -type semiconductors, conductivity $\sigma \approx n_h e \mu_h$

Q.20 Calculate the conductivity of a germanium sample if a donor impurity is added to the extent of one part in 10^7 Ge atoms at room temperature.

Given : Avagadro number $N_a = 6.02 \times 10^{23}$ atoms/gm-mole

Atomic weight of Ge = 72.6, Mobility $\mu_e = 3800 \text{ cm}^2/\text{V-sec}$,

Density of Ge = 5.32 gm/cc

Ans. : Given data :

As density of Ge = 5.32 gm/cc, mass of 1 cc of Ge is 5.32 gm. 72.6 gm of Ge contains 6.02×10^{23} atoms.

$$\therefore \text{Number of Ge atoms in 1 cc} = \frac{6.02 \times 10^{23}}{72.6} \times 5.32 = 4.41 \times 10^{22}$$

i.e., there are 4.41×10^{22} Ge atoms per cc. As there is one donor impurity per 10^7 Ge atoms, the density of donor impurity atoms, which is same as density of free electrons is

$$n_e = \frac{4.41 \times 10^{22}}{10^7} = 4.41 \times 10^{15} / \text{cc}$$

Formula :

$$\sigma_n = n_e e \mu_e$$

$$e = 1.6 \times 10^{-19} \text{ C}, \mu_e = 3800 \text{ cm}^2/\text{V-s}$$

$$\therefore \sigma_n = 4.41 \times 10^{15} \times 1.6 \times 10^{-19} \times 3800$$

$\therefore$

$$\sigma_n = 2.6813 \text{ mho/cm}$$

Q.21 : Calculate the conductivity of pure silicon at room temperature when the concentration of carriers is 1.6×10^{10} per cm^3 .
Take $\mu_e = 1500 \text{ cm}^2/\text{V-s}$ and $\mu_h = 500 \text{ cm}^2/\text{V-s}$ at room temperature.

Ans. : Given data : $n_i = 1.6 \times 10^{10}$ per cm^3

$$e = 1.6 \times 10^{-19} \text{ C}$$

$$\mu_e = 1500 \text{ cm}^2/\text{V-s}$$

$$\mu_h = 500 \text{ cm}^2/\text{V-s}$$

Formula :

$$\sigma_i = n_i e (\mu_e + \mu_h)$$

$$\therefore \sigma_i = 1.6 \times 10^{10} \times 1.6 \times 10^{-19} (1500 + 500)$$

$\therefore$

$$\sigma_i = 5.12 \times 10^{-6} \text{ mho/cm}$$

Q.22 : Calculate the number of donor atoms which must be added to an intrinsic semiconductor to obtain the resistivity as $10^{-6} \Omega \text{ cm}$.

Given : $\mu_e = 1000 \text{ cm}^2/\text{V-sec}$

[SPPU : Dec.-07]

Ans. : Given data : $\rho = 10^{-6} \Omega\text{-cm}$

$$e = 1.6 \times 10^{-19} \text{ C}$$

$$\mu_e = 1000 \text{ cm}^2/\text{V-sec}$$

Formula :

$$\rho = \frac{1}{\sigma}$$

$\therefore$

$$\rho = \frac{1}{n_e e \mu_e}$$

$\therefore$

$$n_e = \frac{1}{\rho e \mu_e}$$

$$\therefore n_e = \frac{1}{10^{-6} \times 1.6 \times 10^{-19} \times 1000}$$

$$\therefore n_e = 6.25 \times 10^{21} \text{ per cm}^3$$

Q.23 Calculate the number of acceptors to be added to a Germanium sample to obtain the resistivity of 10 Ω -cm.

Given : $\mu = 1700 \text{ cm}^2/\text{V} - \text{sec}.$ [SPPU : May-08, 12, 19, Marks 3]

Ans. : Given data : $\rho = 10 \Omega\text{-cm}$

$$e = 1.6 \times 10^{-19} \text{ C}$$

$$\mu_h = 1700 \text{ cm}^2/\text{V} - \text{s}$$

Formula :
$$\rho = \frac{1}{n_h e \mu_h}$$

$$\therefore n_h = \frac{1}{\rho e \mu_h}$$

$$\therefore n_h = \frac{1}{10 \times 1.6 \times 10^{-19} \times 1700}$$

$$\therefore n_h = 3.676 \times 10^{14} \text{ per cm}^3$$

Q.24 Calculate the current produced in a small Germanium plate of area 1 cm^2 and of thickness 0.3 mm when a P.D. of 2 V is applied across the faces.

Given : $n_i = 2 \times 10^{19} / \text{m}^3$, $e = 1.6 \times 10^{-19} \text{ C}$, $\mu_e = 0.36 \text{ m}^2/\text{V} - \text{s}$, $\mu_h = 0.17 \text{ m}^2/\text{V} - \text{s}$

Ans. : Given data : $V = 2 \text{ V}$, $l = 0.3 \text{ mm} = 0.3 \times 10^{-3} \text{ m}$

$$A = 1 \text{ cm}^2 = 1 \times 10^{-4} \text{ m}^2$$

Formula :
$$J = \frac{I}{A} = \sigma E$$

$$\therefore I = \sigma E A$$

As
$$E = \frac{V}{l}, \text{ and } \sigma = n_i e (\mu_e + \mu_h)$$

$$I = n_i e (\mu_e + \mu_h) \frac{V}{l} A$$

$$\therefore I = 2 \times 10^{19} \times 1.6 \times 10^{-19} (0.36 + 0.17) \times \frac{2}{0.3 \times 10^{-3}} \times 1 \times 10^{-4}$$

$\therefore$

$$I = 1.13 \text{ A}$$

Q.25 Calculate the conductivity of Ge specimen if donor impurity is added to the extent of one part in 10^8 Ge atoms at room temperature. (Given : Atomic weight of Ge = 72.6, Density of Ge : 5.32 gm/cm^3 , mobility of electrons = $3800 \text{ cm}^2/\text{v} - \text{sec}$. Avagadro number = $6.02 \times 10^{23} \text{ atoms/mole}$).

 [SPPU : Dec.-09, 18, May-17, Marks 3]

Ans. : Given : As density of Ge = 5.32 gm/cm^3 , mass of 1 cm^3 of Ge is 5.32 gm.

72.6 gm of Ge contains 6.02×10^{23} atoms.

$$\therefore \text{Number of Ge atoms in } 1 \text{ cm}^3 = \frac{6.02 \times 10^{23}}{72.6} \times 5.32 = 4.41 \times 10^{22}$$

i.e, there are 4.41×10^{22} Ge atoms per cm^3 .

As there is one donor impurity per 10^8 Ge atoms, the density of donor impurity atoms and hence density of free electrons is,

$$n_e = \frac{4.41 \times 10^{22}}{10^8} = 4.41 \times 10^{14} \text{ per cm}^3$$

$$e = 1.6 \times 10^{-19} \text{ C}$$

$$\mu_e = 3800 \text{ cm}^2/\text{v} - \text{sec}$$

Formula :

$$\sigma_n = n_e e \mu_e$$

$\therefore$

$$\sigma_n = 4.41 \times 10^{14} \times 1.6 \times 10^{-19} \times 3800$$

$\therefore$

$$\sigma_n = 0.268 \text{ mho/cm}$$

Q.26 Intrinsic silicon is doped with phosphorus, with the atomic ratio of $10^8(\text{Si}) : 1(\text{P})$. Calculate the conductivity of N type of

silicon thus formed. Given mobility of electrons in silicon $\mu_e = 1400 \text{ cm}^2\text{V}^{-1}\text{s}^{-1}$. Atomic weight of intrinsic silicon = 28.085, Avogadro's number = 6.022×10^{23} atoms per mole, Density of silicon = 2.33 gm/cm^3 .

☞ [SPPU : Dec.-11]

Ans. : Given : As density of silicon is 2.33 gm/cm^3 , mass of 1 cm^3 silicon is 2.33 gm.

28.085 gm of silicon contains 6.022×10^{23} atoms,

$$\therefore \text{Number of silicon atoms in } 1 \text{ cm}^3 = \frac{6.022 \times 10^{23}}{28.085} \times 2.33 = 5 \times 10^{22}$$

As there is 1 phosphorus atom 10^8 atoms of silicon, the density of free electrons is

$$n_e = \frac{5 \times 10^{22}}{10^8} = 5 \times 10^{14} \text{ per cm}^3$$

Formula :

$$\sigma_n = n_e e \mu_e$$

$$\sigma_n = n_e e \mu_e = 5 \times 10^{14} \times 1.6 \times 10^{-19} \times 1400$$

$$\therefore \sigma_n = 0.112 \text{ mho/cm}$$

Q.27 The resistivity of copper wire of diameter 1.03 mm is 6.51 ohm per 300 m. The concentration of free electrons in copper is $8.4 \times 10^{28}/\text{m}^3$. If the current is 2 A, find the mobility of free electrons.

☞ [SPPU : May-12]

$$\text{Ans. : Given data : } R = 6.51 \text{ ohm ; } A = \frac{\pi}{4} d^2 = \frac{\pi}{4} \times (1.03 \times 10^{-3})^2$$

$$l = 300 \text{ m}$$

Formula :

$$\rho = R \times \frac{A}{l}$$

$$\therefore \rho = 6.51 \times \frac{\frac{\pi}{4} \times (1.03 \times 10^{-3})^2}{200}$$

$$= 1808 \times 10^{-8} \text{ ohm-m}$$

$$\sigma = \frac{1}{\rho} = n e \mu$$

$$\therefore \mu = \frac{1}{n e \rho} = \frac{1}{8.4 \times 10^{28} \times 1.6 \times 10^{-19} \times 1808 \times 10^{-8}}$$

∴

$$\mu = 4.115 \times 10^{-3} \text{ m}^2/\text{V-s}$$

Q.28 Calculate the number of acceptors to be added to a germanium sample to obtain the resistivity of 20 Ω cm.

Given : $\mu = 1700 \text{ cm}^2/\text{V}\cdot\text{sec}$

 [SPPU : Dec.-15, May-18, Marks 3]

Ans. : Given data : $\rho = 20 \text{ Ω cm}$, $e = 1.6 \times 10^{-19} \text{ C}$,

$$\mu_h = 1700 \text{ cm}^2/\text{V sec.}$$

Formula :

$$\rho = \frac{1}{n_h e \mu_h}$$

∴

$$n_h = \frac{1}{\rho e \mu_h}$$

∴

$$n_h = \frac{1}{20 \times 1.6 \times 10^{-19} \times 1700}$$

∴

$$n_h = 1.838 \times 10^{14} \text{ per cm}^3$$

Q.29 Calculate the number of acceptor atoms that need to be doped in germanium sample to obtain the resistivity of 8 Ω cm.

[Given : mobility $\mu = 1600 \text{ cm}^2/\text{V}\cdot\text{s}$]

 [SPPU : May-16, Marks 3]

Ans. : Given : $\rho = 8 \text{ Ω cm}$, $e = 1.6 \times 10^{-19} \text{ C}$

$$\mu_h = 1600 \text{ cm}^2/\text{V}\cdot\text{s}$$

Formula :

$$\rho = \frac{1}{n_h e \mu_h}$$

∴

$$n_h = \frac{1}{\rho e \mu_h}$$

∴

$$n_h = \frac{1}{8 \times 1.6 \times 10^{-19} \times 1600}$$

∴

$$n_h = 4.883 \times 10^{14} \text{ per cm}^3$$

7.9 : Fermi-Level in Semiconductors

Q.30

Using expression for concentration of free electrons and holes, derive an expression for fermi level in intrinsic semiconductors. Describe its variation with temperature.

Ans. : In an intrinsic semiconductor,

$$n = p$$

$$\therefore 2 \left[\frac{2\pi m_e^* kT}{h^2} \right]^{3/2} e^{-(E_c - E_F)/kT} = 2 \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/2} e^{-(E_F - E_v)/kT}$$

$$\therefore (m_e^*)^{3/2} e^{-(E_c - E_F)/kT} = (m_h^*)^{3/2} e^{-(E_F - E_v)/kT}$$

$$e^{-(E_c - E_F)/kT} e^{(E_F - E_v)/kT} = \left(\frac{m_h^*}{m_e^*} \right)^{3/2}$$

$$e^{-(E_c + E_v)/kT} e^{2E_F/kT} = \left(\frac{m_h^*}{m_e^*} \right)^{3/2}$$

$$e^{2E_F/kT} = \left(\frac{m_h^*}{m_e^*} \right)^{3/2} e^{(E_c + E_v)/kT}$$

Taking logs on both sides,

$$\frac{2E_F}{kT} = \frac{3}{2} \log_e \left(\frac{m_h^*}{m_e^*} \right) + \frac{E_c + E_v}{kT}$$

$$E_F = \frac{3}{4} kT \log_e \left(\frac{m_h^*}{m_e^*} \right) + \frac{E_c + E_v}{2} \quad \dots(1)$$

If $m_h^* = m_e^*$,

$$\log_e \left(\frac{m_h^*}{m_e^*} \right) = \log_e 1 = 0$$

$$\therefore E_F = \frac{E_c + E_v}{2} \quad \dots(2)$$

- Hence the Fermi level lies at the centre of the forbidden band as shown in Fig. Q.30.1.

- Actually, $m_h^* > m_e^*$. Hence E_F is slightly raised above the centre of the forbidden band as temperature increases.



Q.31 Derive expression for fermi level in an n-type semiconductor and describe its variation with temperature.

Fig. Q.30.1

Ans. : The number of electrons in conduction band per unit volume is given by,

$$n = 2 \left[\frac{2\pi m_e^* kT}{h^2} \right]^{3/2} e^{-(E_C - E_F)/kT} \quad \dots(1)$$

- Let N_d be the density of donor atoms added to an intrinsic semiconductor and E_d be the energy of the donor impurities (which are just below the bottom of conduction band).
- The density of free electrons in conduction band will be equal to the density of ionized donor atoms as for every donor atom that is ionized, there will be one free electron.
- The probability of an electron having energy E_d is $f(E_d)$. The electron will either be in the donor level or in the conduction band. Hence the probability of finding the electron in conduction band is same as the probability that it is not in donor energy level, i.e. $1 - f(E_d)$.

$\therefore$ Density of ionized donor atoms = $N_d [1 - f(E_d)]$

$$\begin{aligned} &= N_d \left[1 - \frac{1}{1 + e^{(E_d - E_F)/kT}} \right] = N_d \left[\frac{1 + e^{(E_d - E_F)/kT} - 1}{1 + e^{(E_d - E_F)/kT}} \right] \\ &= N_d \left[\frac{e^{(E_d - E_F)/kT}}{1 + e^{(E_d - E_F)/kT}} \right] = N_d \left[\frac{1}{e^{-(E_d - E_F)/kT} + 1} \right] \end{aligned}$$

As E_F lies more than a few kT above E_d ,

$$e^{-(E_d - E_F)/kT} \gg 1$$

Hence, 1 can be neglected in the denominator.

$$\begin{aligned} \therefore \text{Density of ionized donor atoms} &= N_d \left[\frac{1}{e^{-(E_d - E_F)/kT}} \right] \\ &= N_d e^{(E_d - E_F)/kT} \end{aligned}$$

Density of electrons in conduction band = Density of ionized donor atoms

$$\begin{aligned} \therefore 2 \left[\frac{2\pi m_e^* kT}{h^2} \right]^{3/2} e^{-(E_c - E_F)/kT} &= N_d e^{(E_d - E_F)/kT} \\ 2 \left[\frac{2\pi m_e^* kT}{h^2} \right]^{3/2} &= N_d e^{(E_c + E_d - 2E_F)/kT} \\ 2 \left[\frac{2\pi m_e^* kT}{h^2} \right]^{3/2} &= N_d e^{(E_c + E_d)/kT} e^{-2E_F/kT} \\ e^{2E_F/kT} &= \frac{N_d e^{(E_c + E_d)/kT}}{2 \left[\frac{2\pi m_e^* kT}{h^2} \right]^{3/2}} \\ e^{E_F/kT} &= \frac{N_d^{1/2} e^{(E_c + E_d)/2kT}}{2^{1/2} \left[\frac{2\pi m_e^* kT}{h^2} \right]^{3/4}} \quad \dots (2) \end{aligned}$$

Substituting in equation (1) for $e^{E_F/kT}$,

$$\begin{aligned} n &= 2^{1/2} \left[\frac{2\pi m_e^* kT}{h^2} \right]^{3/4} N_d^{1/2} e^{-E_c/kT} e^{(E_c + E_d)/2kT} \\ \therefore n &= (2N_d)^{1/2} \left[\frac{2\pi m_e^* kT}{h^2} \right]^{3/4} e^{(E_d - E_c)/2kT} \quad \dots (3) \end{aligned}$$

Fermi Level in n - Type

Taking log of equation (2),

$$\frac{E_F}{kT} = \frac{E_c + E_d}{2kT} + \frac{1}{2} \log \left[\frac{N_d}{2 \left(\frac{2\pi m_e^* kT}{h^2} \right)^{3/2}} \right]$$

$$E_F = \frac{E_c + E_d}{2} + \frac{kT}{2} \log \left[\frac{N_d}{2 \left(\frac{2\pi m_e^* kT}{h^2} \right)^{3/2}} \right]$$

At 0 K,

$$E_F = \frac{E_c + E_d}{2}$$

- i.e, the Fermi level lies mid way between donor impurity levels and bottom of conduction band.
- As temperature increases, E_F shifts downwards. The Fermi level shifts upwards on increasing the doping concentration N_d .

Q.32 Derive expression for fermi level in p-type semiconductor and describe its variation with temperature.

Ans. : • The number of holes in valence band per unit volume is given by,

$$p = 2 \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/2} e^{-(E_F - E_v)/kT} \quad \dots (1)$$

- Let N_a be the density of acceptor atoms added to an intrinsic semiconductor and E_a be the energy of the acceptor impurities (which are just above the top of valence band).
- When an acceptor atom gains an electron, it becomes a negative ion and the electron is in the energy level E_a .

- The probability of finding an electron in acceptor energy level is $f(E_a)$.

$$\therefore \text{Density of ionized acceptor atoms} = N_a f(E_a)$$

$$= N_a \times \frac{1}{1 + e^{(E_a - E_F)/kT}}$$

$E_a - E_F$ is large compared to kT .

$$\therefore e^{(E_a - E_F)/kT} \gg 1$$

Hence, 1 can be neglected in the denominator.

$$\therefore \text{Density of ionized acceptor atoms} = N_a \times \frac{1}{e^{(E_a - E_F)/kT}}$$

Density of holes in valence band = Density of ionized acceptor atoms

$$\begin{aligned} \therefore 2 \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/2} e^{-(E_F - E_v)/kT} &= N_a \times \frac{1}{e^{(E_a - E_F)/kT}} \\ 2 \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/2} &= N_a \times e^{(E_F - E_v - E_a + E_F)/kT} \\ 2 \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/2} &= N_a \times e^{2E_F/kT} e^{-(E_a + E_v)/kT} \\ e^{-2E_F/kT} &= \frac{N_d e^{-(E_a + E_v)/kT}}{2 \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/2}} \\ e^{-E_F/kT} &= \frac{N_d^{1/2} e^{-(E_a + E_v)/2kT}}{2^{1/2} \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/4}} \quad \dots(2) \end{aligned}$$

Substitute in equation (1).

$$\therefore p = 2 \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/2} e^{-(E_F - E_v)/kT}$$

$$\begin{aligned}
 &= 2 \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/2} e^{-E_F/kT} e^{E_v/kT} \\
 &= 2 \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/2} e^{E_v/kT} \times \frac{N_d^{1/2} e^{-(E_a + E_v)/2kT}}{2^{1/2} \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/4}}
 \end{aligned}$$

$$\therefore p = (2N_a)^{1/2} \left[\frac{2\pi m_h^* kT}{h^2} \right]^{3/4} e^{-(E_a - E_v)/2kT} \quad \dots(3)$$

Fermi Level in p - Type

Taking log of equation (2),

$$-\frac{E_F}{kT} = \frac{1}{2} \log \left[\frac{N_a}{2 \left(\frac{2\pi m_h^* kT}{h^2} \right)^{3/2}} \right] - \frac{E_a + E_v}{2kT}$$

$$\therefore E_F = \frac{E_a + E_v}{2} - \frac{kT}{2} \log \left[\frac{N_a}{2 \left(\frac{2\pi m_h^* kT}{h^2} \right)^{3/2}} \right] \quad \dots(4)$$

At $T = 0$ K,

$$E_F = \frac{E_C + E_v}{2}$$

- i.e, the Fermi level lies mid way between acceptor impurity levels and top of valence band.
- As temperature increases, E_F shifts upwards. The Fermi level shifts downwards on increasing the doping concentration N_d .

7.10 : p-n Junction Diode

Q.33 Explain the working of p-n junction diode in i) Zero bias ii) Forward Bias iii) Reverse Bias On the basis of energy level diagram.

Ans. : • i) Open circuited p-n junction (zero bias) : • The Fermi level is close to valence band in *p*-type and close to conduction band in *n*-type as shown in Fig. Q.33.1.

- When the *p* and *n*-type are brought in contact, the electrons in the *n*-type have a higher average energy than the *p*-type.
- The lower position of fermi level in *p*-type compared to *n*-type means that there are lower vacant energy states for the electrons in *p*-type as compared to *n*-type. Hence electrons start diffusing from *n*-type to *p*-type.
- Diffusion of electrons continues till the fermi levels are equalized across the junction.
- Under equilibrium conditions, there is a single Fermi level throughout the diode which is close to valence band in *p*-type and close to conduction band in *n*-type.
- The energy bands of the *n*-type shift downward with respect to energy bands of *p*-type by eV_B where V_B is the barrier potential for alignment of the fermi levels as shown in Fig. Q.33.2.

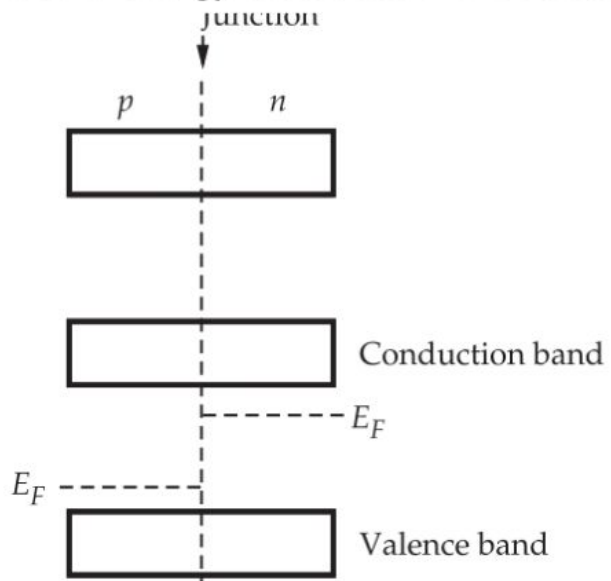


Fig. Q.33.1

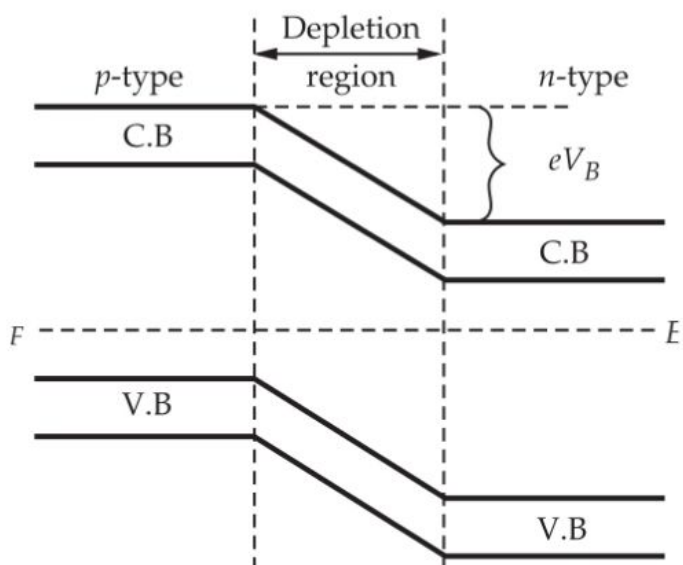


Fig. Q.33.2

- ii) **Forward bias :** • Diode is said to be forward biased

when the p -type is connected to positive terminal and n -type to negative terminal of battery.

- As electrons are removed from p -type by the positive terminal of battery, holes are created which lowers the Fermi level.
- The negative terminal of battery connected to n -type supplies free electrons due to which the Fermi level is raised.
- Hence the energy bands of n -type are raised compared to those of p -type. If ' V ' is the applied voltage, the energy difference between the conduction bands reduces to $e(V_B - V)$.
- Due to this reduced barrier the electrons can cross the junction and conduction starts when $V > V_B$, i.e. when conduction band in n -type is at higher level than conduction band of p -type.
- The energy band structure of forward biased diode is shown in Fig. Q.33.3.

iii) Reverse bias :

• Diode is said to be reverse biased when p -type is connected to negative terminal and n -type to positive terminal of battery.

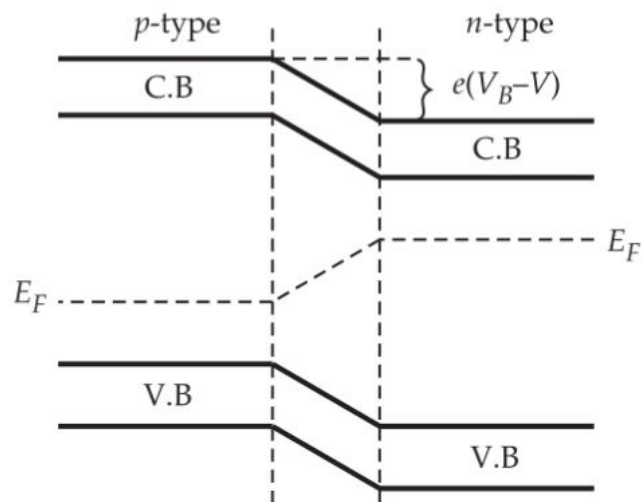


Fig. Q.33.3

- The negative terminal supplies free electrons into p -type which raises the Fermi level.
- The positive terminal takes away free electrons from n -type which lowers the Fermi level.
- Therefore the energy bands of n -type are shifted downwards with respect to p -type.
- The energy difference between the conduction bands of n and p -type increases to $e(V_B + V)$ where ' V ' is the applied voltage.
- The free electrons in n -type now face a larger potential barrier and the diode does not conduct.

The energy band structure of reverse biased diode is shown in Fig.Q.33.4.

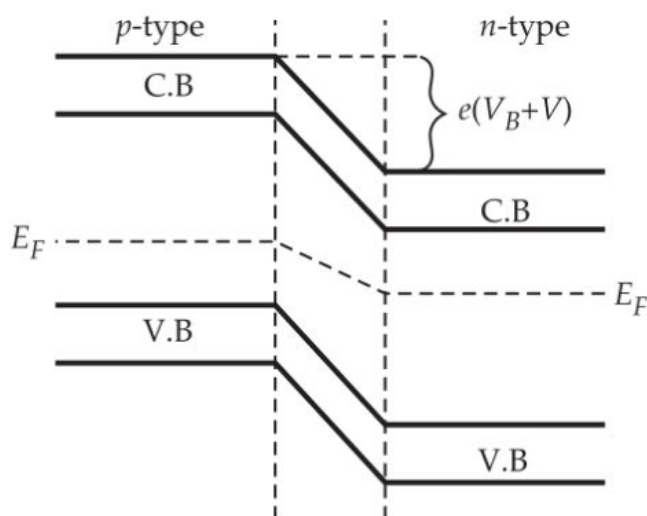


Fig. Q.33.4

Q.34 What is Fermi energy in semiconductor ? With the help of labeled diagram show the position of Fermi level in the case of a diode that is connected in forward bias. [SPPU : May-16, Marks 3]

Ans. : Refer Q.12 and Q.33.

Q.35 Derive an expression for barrier potential in diodes.

Ans. : • Consider the band diagram of an open circuited p-n junction as shown in Fig. Q.35.1

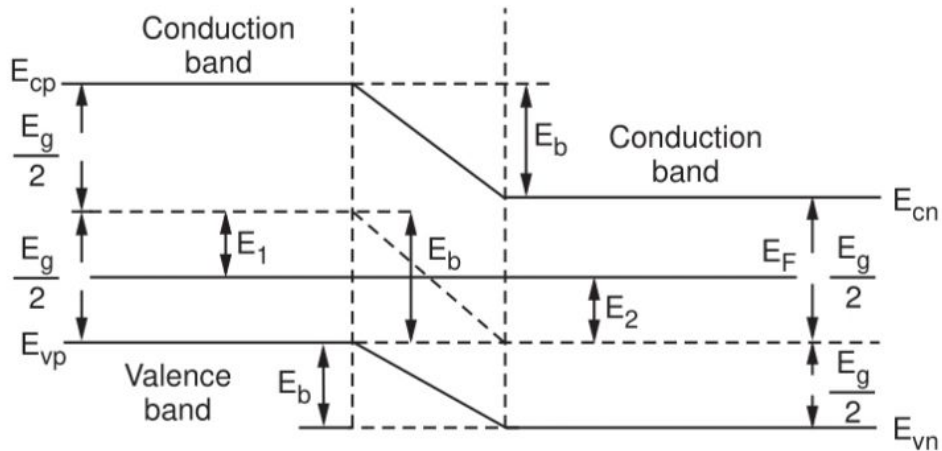


Fig. Q.35.1

- Let all energies be in electron volt (eV) so that the potential differences will be numerically equal to the corresponding energy difference.
- Let E_{vp} and E_{vn} be valence band energies in p and n types. E_{cp} and E_{cn} the conduction band energies in p and n types and E_b be the numerical value of the barrier potential. E_g is the energy gap.
- From Fig. Q.35.1,

$$\begin{aligned} E_b &= E_{cp} - E_{cn} = E_{vp} - E_{vn} \\ &= E_1 + E_2 \end{aligned} \quad \dots(1)$$

$$E_F - E_{vp} = \frac{E_g}{2} - E_1 \quad \dots(2)$$

$$E_{cn} - E_F = \frac{E_g}{2} - E_2 \quad \dots(3)$$

- Adding equations (2) and (3),

$$(E_F - E_{vp}) + (E_{cn} - E_F) = E_g - (E_1 + E_2)$$

$$\therefore E_1 + E_2 = E_g - (E_{cn} - E_F) - (E_F - E_{vp})$$

- From equation (1),

$$E_b = E_g - (E_{cn} - E_F) - (E_F - E_{vp})$$

- But,

$$E_g = KT \ln \frac{N_c N_v}{n_i^2}$$

$$E_{cn} - E_F = KT \ln \frac{N_c}{N_D}$$

And, $E_F - E_{vp} = KT \ln \frac{N_v}{N_A}$

$$\begin{aligned} \therefore E_b &= KT \left[\ln \frac{N_c N_v}{n_i^2} - \ln \frac{N_c}{N_D} - \ln \frac{N_v}{N_A} \right] \\ &= KT \ln \left[\frac{N_c N_v}{n_i^2} \times \frac{N_D}{N_c} \times \frac{N_A}{N_v} \right] \\ E_b &= KT \ln \left(\frac{N_D N_A}{n_i^2} \right) \quad \dots(4) \end{aligned}$$

Q.36 State the ideal diode equation. Explain diode characteristics predicted by this equation.

Ans. : • The ideal diode equation relates the current (I) through the diode with the voltage (V) across it.

The ideal diode equation, also known as Shockley ideal equation or diode law is given by

$$I = I_0 \left(e^{V/\eta V_T} - 1 \right) \quad \dots(1)$$

Where, I_0 is the reverse saturation current,

$$V_T = \frac{T}{11,600} \text{ is known as volt equivalent of temperature,}$$

$$T = \text{Absolute temperature}$$

- η is a constant which is 1 for germanium and approximately 2 for silicon.

At room temperature i.e. $T = 300 \text{ K}$, $V_T = 26 \times 10^{-3} \text{ V}$

- For reverse bias, v is negative. As V_T is very small, the exponential term in equation (Q.36.1) is nearly zero.

$$\therefore I \approx -I_0$$

- Hence, in reverse bias, the current is constant which is the reverse saturation current and the negative sign indicates that it flows from n to p type.

- In forward bias the exponential term is large compared to 1.

$$\therefore I = I_0 e^{v/\eta V_T}$$

- Hence, current rises exponentially and positive sign indicates that it flows from p to n type.

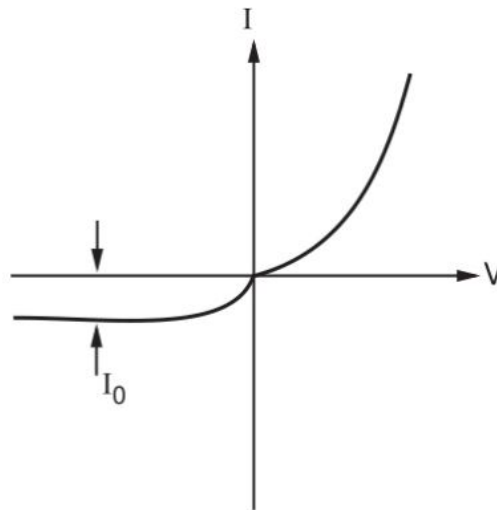


Fig. Q.36.1

- The diode characteristics predicted by ideal diode equation are shown in Fig. Q.36.1.

7.11 : Solar Cell

Q.37 Explain the construction and working of solar cell. Also draw the IV characteristics of solar cell and define fill factor.

☞ [SPPU : May-18, Marks 4]

Ans. : • Solar cell is a photovoltaic device used to convert solar energy into electrical energy. It is a p - n junction with a large

surface area as compared to p - n junction diodes and a very thin p -layer.

- When light falls on the upper p -type layer, electron - hole pairs are created. As the p -layer is very thin, the electron hole pairs are formed close to the depletion region.
- The electric field in the depletion region (due to barrier potential), separates the electron-hole pairs.
- The electrons diffuse into n -type and holes from n -type to p -type.

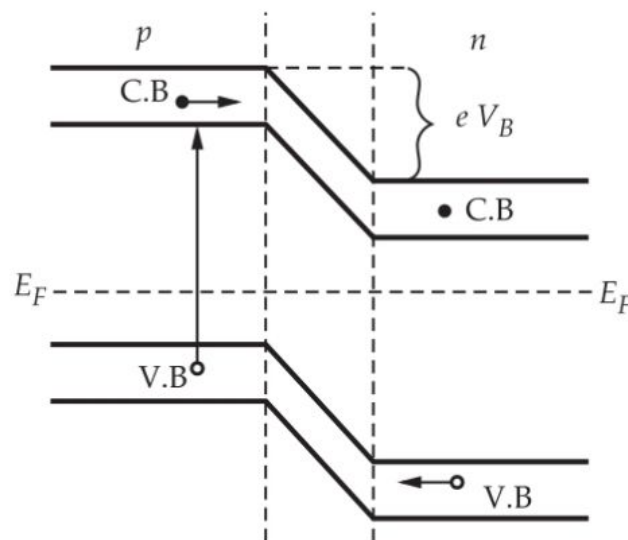


Fig. Q.37.1

- The electrons in p -type are the minority charge carriers and diffuse towards n -type as lower energy states are available for these electrons in n -type as shown in the energy band diagram in Fig. Q.37.1.
- As a result of this diffusion a potential difference develops across the solar cell which is proportional to the intensity of light but has a maximum value of about 0.5 V for silicon cells and 0.1 V for germanium cells.
- If an external load resistance is connected across the cell, current flows through the load and power is delivered to it.

- The circuit used to study characteristics of solar cell is shown in Fig. Q.37.2.
- When load resistance is infinite, no current flows through it and maximum voltage appears across the solar cell which is known as **open circuit voltage V_{oc}** .

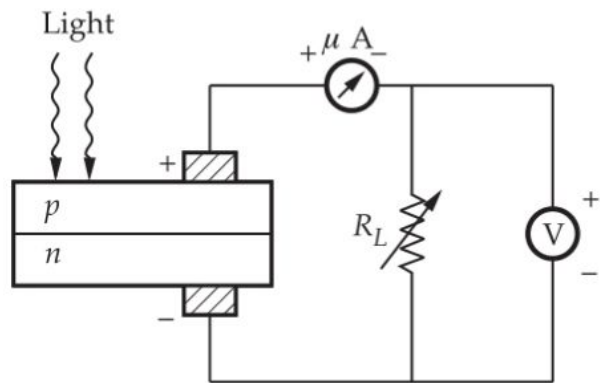


Fig. Q.37.2

- If $R_L = 0$, maximum current flows through it which is called the short circuit current I_{sc} .
- The typical I - V characteristics of a solar cell are shown in Fig. Q.37.3. $V_{oc} I_{sc}$ is theoretically the maximum power that can be obtained from the solar cell. Experimentally the maximum power is $V_m I_m$.

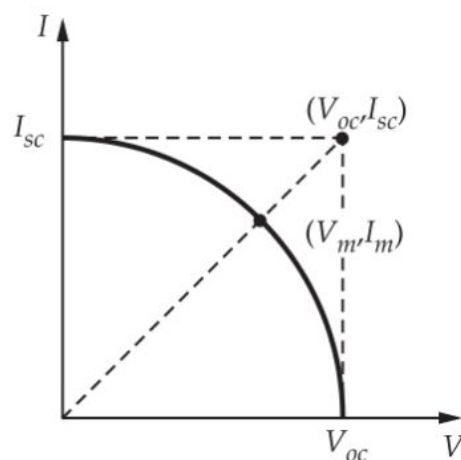


Fig. Q.37.3

- The fill factor of the solar cell is defined as the ratio of the experimentally maximum power to the ideal power.

$$\therefore \text{Fill factor} = \frac{V_m I_m}{V_{oc} I_{sc}}$$

Q.38 List any three applications of solar cell. Explain any one of them in brief.

☞ [SPPU : May-19, Marks 3]

Ans. : Applications of solar cells

- Solar cells are used in satellites, space vehicles and in remote places as a source of energy.

- They are used in battery charging system, outdoor lighting system and in telecommunication system.
- A few countries like USA and Germany have photovoltaic power plants.
- The solar cells are widely used in electronic equipments with low power consumption like calculators.
- As calculators require only about 2V at very low current, a series combination of 4 solar cells is sufficient to provide this power.
- As these cells are very small, they do not make the equipment bulky.

7.12 : Hall Effect

Q.39 What is hall effect ? Derive the expression for hall voltage and hall coefficient. State applications of hall effect.

👉 [SPPU : May-17, Marks 6]

Ans. : Hall voltage and Hall coefficient

- Consider a conductor of rectangular cross section of dimensions $w \times d$ in which current I flows along x -axis, magnetic field is applied along z -axis and Hall voltage develops along y -axis which is measured across terminals 1 and 2 as shown in Fig. Q.39.1.

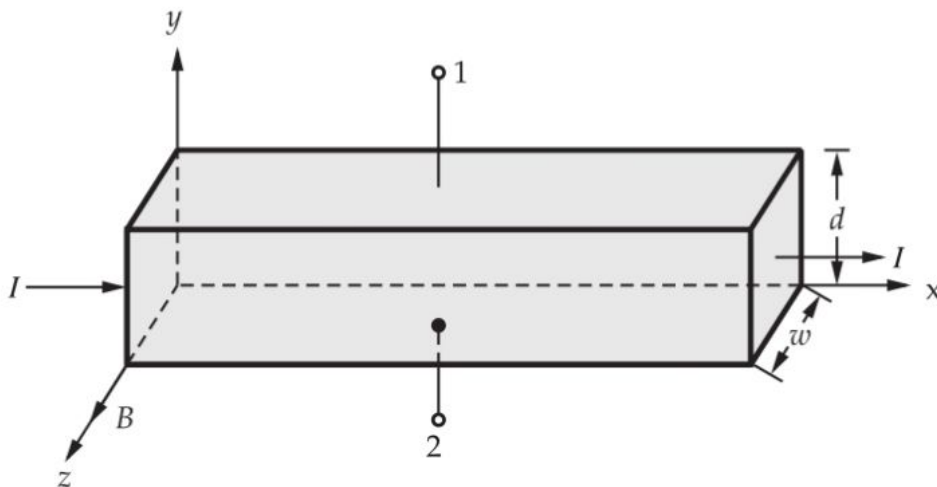


Fig. Q.39.1

- The dimension ' w ' (the width) is parallel to the direction of magnetic field and (' d ' the thickness) is parallel to the axis along which Hall voltage develops.
- Let V_H = Hall voltage and E_H , the corresponding electric field

and v = Drift velocity of charges

- Under equilibrium conditions, force on charge carriers due to magnetic field will be balanced by the force on them due to E_H .

$$\therefore q E_H = q v B$$

$$\therefore E_H = v B$$

- Also $E_H = \frac{V_H}{d}$

$$\therefore \frac{V_H}{d} = v B$$

$$\therefore V_H = v B d \quad \dots (1)$$

- From equation (1),

$$I = n q a v$$

$$\therefore v = \frac{I}{n q a}$$

- Substituting in equation (1),

$$V_H = \frac{I B d}{n q a} \quad \dots (2)$$

As $a = w \times d$

$$V_H = \frac{I B}{n q w} \quad \dots (3)$$

- The quantity $\frac{1}{n q}$ is the reciprocal of charge density and is defined as the Hall coefficient ' R_H '.

$$\therefore R_H = \frac{1}{n q} \quad \dots (4)$$

From equation (2),

$$V_H = R_H \frac{I B d}{a} \quad \dots (5)$$

- As V_H , B , d and a are measurable quantities, R_H and hence charge density nq can be determined using equation (7.19.7).
- If E is the electric field to produce current, V is the applied voltage along x -axis, and l is the length of the conductor along x - axis,

$$E = \frac{V}{l}$$

Also,
$$E_H = vB = \frac{BI}{nqa}$$

$$\therefore \frac{E_H}{E} = \frac{BI}{nqa} \times \frac{l}{V}$$

$$R = \frac{V}{I}$$

$$\therefore \frac{E_H}{E} = \frac{B}{nqa} \times \frac{l}{R}$$

But,
$$\rho = \frac{Ra}{l}$$

$$\therefore \frac{E_H}{E} = \frac{B}{nq\rho}$$

- Charges in the conductor will be under the influence of two mutually perpendicular electric fields - E along x - axis and E_H along y - axis.
- The angle made by the resultant electric field with the x - axis is known as the **Hall angle** (θ_H).

$$\therefore \tan \theta_H = \frac{E_H}{E} = \frac{B}{nq\rho} \quad \dots (6)$$

- Once charge density is known, we can determine mobility of charge carriers using

$$\sigma = n q \mu \quad \dots (7)$$

• Also,
$$\sigma = \frac{\mu}{R_H} \quad \dots (8)$$

Hence,
$$\rho = \frac{R_H}{\mu} \quad \dots (9)$$

- Equation (6) can be written as

$$\tan \theta_H = \frac{B\sigma}{nq}$$

$\therefore \tan \theta_H = B\mu \quad \dots(10)$

- Conductivity σ can be determined using

$$\sigma = \frac{1}{\rho} = \frac{l}{R a}$$

- Thus the Hall effect can be used to determine

- Whether charge carriers are positive or negative which in turn determines whether semiconductor is *n*-type or *p*-type.
- Density of charge carriers.
- Mobility of charge carriers.

Q.40 Explain Hall effect. Derive the equations of Hall voltage and Hall coefficient.

👉 [SPPU : Dec.-15, Marks 3]

Ans. : Refer Q.39.

Important Formulae

$$V_H = \frac{I B d}{n q a} \quad \dots (1)$$

$$V_H = \frac{I B}{n q w} \quad \dots (2)$$

$\therefore R_H = \frac{1}{n q} \quad \dots (3)$

$$V_H = R_H \frac{I B d}{a} \quad \dots (4)$$

Q.41 A copper specimen having length 1 meter, width 1 cm and thickness 1 mm is conducting 1 ampere current along its length and is applied with a magnetic field of 1 tesla along its thickness. It experience Hall effect and a Hall voltage of 0.074 microvolts appear along its width. Calculate the Hall coefficient and the mobility of electrons in copper. Conductivity of copper is $\sigma = 5.8 \times 10^7 (\text{Wm})^{-1}$.

👉 [SPPU : Dec.-05]

Ans. : Given data : $V_H = 0.074 \mu\text{V} = 0.074 \times 10^{-6} \text{ V}$

$$a = 1 \times 10^{-2} \times 1 \times 10^{-3} = 10^{-5} \text{ m}^2$$

$$B = 1 \text{ T}, I = 1 \text{ A}, d = 1 \text{ cm} = 10^{-2} \text{ m}$$

Formula : $V_H = R_H \frac{B I d}{a}$

$$\therefore R_H = \frac{V_H a}{B I d}$$

$$\therefore R_H = \frac{0.074 \times 10^{-6} \times 10^{-5}}{1 \times 1 \times 10^{-2}}$$

$$\therefore R_H = 7.4 \times 10^{-11} \text{ m}^3/\text{C}$$

$$\text{Mobility } \mu = \sigma R_H$$

$$\sigma = 5.8 \times 10^7 (\Omega\text{m})^{-1}$$

$$\therefore \mu = 5.8 \times 10^7 \times 7.4 \times 10^{-11}$$

$$\therefore \mu = 4.292 \times 10^{-3} \text{ m}^2/\text{V-s}$$

Q.42 A slab of copper 2.0 mm in thickness and 1.5 cm wide is placed in a uniform magnetic field with magnitude 0.40 T. When a current of 75 amp flows along the length, the voltage measured across the width is 0.81 μV . Determine the concentration of mobile electrons in copper.

 [SPPU : May-06]

Ans. : Given data : $B = 0.4 \text{ T}$

$$I = 75 \text{ A}$$

$$d = 1.5 \text{ cm} = 1.5 \times 10^{-2} \text{ m}$$

$$V_H = 0.81 \mu\text{V} = 0.81 \times 10^{-6} \text{ V}$$

$$q = 1.6 \times 10^{-19} \text{ C}$$

$$a = 2 \times 10^{-3} \times 1.5 \times 10^{-2} = 3 \times 10^{-5} \text{ m}^2$$

Formula : $V_H = \frac{B I d}{n q a}$

$$\therefore n = \frac{B I d}{V_H q a}$$

$$\therefore n = \frac{0.4 \times 75 \times 1.5 \times 10^{-2}}{0.81 \times 10^{-6} \times 1.6 \times 10^{-19} \times 3 \times 10^{-5}}$$

$$\therefore n = 1.157 \times 10^{29} \text{ per } m^3$$

Q.43 A silver wire is in the form of a ribbon 0.50 cm wide and 0.10 mm thick . When a current of 2 amp passes through the ribbon, perpendicular to 0.80 tesla magnetic field, calculate the Hall voltage produced. The density of silver is 10.5 gm/cc and atomic weight of Ag = 108. ✍ [SPPU : May-07]

Ans. : Given data : Mass of 1 cc of silver is 10.5 gm

108 gm of silver contains 6.025×10^{23} atoms

$$\therefore \text{Density of electrons } n = \frac{6.025 \times 10^{23}}{108} \times 10.5 = 5.8576 \times 10^{22} \text{ per } cm^3$$

$$\therefore n = 5.8576 \times 10^{28} \text{ per } m^3$$

$$B = 0.8 \text{ T, } I = 2 \text{ A}$$

$w = 0.1 \text{ mm} = 0.1 \times 10^{-3} \text{ m}$ (Assuming that magnetic field is applied along this length)

$$q = 1.6 \times 10^{-19} \text{ C}$$

$$a = 0.1 \times 10^{-3} \times 0.5 \times 10^{-2}$$

Formula :
$$V_H = \frac{BI}{nqw}$$

$$\therefore V_H = \frac{0.8 \times 2}{5.8576 \times 10^{28} \times 1.6 \times 10^{-19} \times 0.1 \times 10^{-3}}$$

$$\therefore V_H = 1.71 \times 10^{-6} \text{ V}$$

$$\therefore V_H = 1.71 \mu\text{V}$$

Q.44 Calculate the mobility of charge carriers in a doped silicon whose conductivity is 100 per $\Omega - m$ and the Hall coefficient is $3.6 \times 10^{-4} m^3/\text{coulomb}$. ✍ [SPPU : May-09,11, Dec.-16, 17, Marks 3]

Ans. : Given data : $\sigma = 100 (\Omega - m)^{-1}$

$$R_H = 3.6 \times 10^{-4} \text{ m}^3/\text{C}$$

Formula :

$$\mu = \sigma R_H$$

$\therefore$

$$\mu = 100 \times 3.6 \times 10^{-4}$$

$\therefore$

$$\mu = 3.6 \times 10^{-2} \text{ m}^3/\text{V-s}$$

Q.45 A specimen having length 1.00 cm, width 1.00 mm and thickness 0.1 mm is made to conduct with 1.00 mA current and is placed in a magnetic field of 1.0 Wb/m², acting along the thickness. Calculate the hall voltage in case of

i) N type semiconductor with hall coefficient of $-3.44 \times 10^{-8} \text{ m}^3/\text{C}$ and ii) Aluminum with hall coefficient of $-0.3 \times 10^{-10} \text{ m}^3/\text{C}$. Which of these materials is more sensitive to hall effect ? Why ?

 [SPPU : Dec.11, Marks 5]

Ans. : Given data : $I = 1 \text{ mA} = 1 \times 10^{-3} \text{ A}$

$$B = 1.0 \text{ Wb/m}^2$$

$$W = 1.00 \text{ mm} = 1 \times 10^{-3} \text{ m}$$

$$d = 0.1 \text{ mm} = 1 \times 10^{-4} \text{ m}$$

$$a = 1 \times 10^{-3} \times 1 \times 10^{-4} = 1 \times 10^{-7} \text{ m}^2$$

Formula :

$$V_A = R_H \frac{B I d}{a}$$

i) $R_H = 3.44 \times 10^{-8} \text{ m}^3/\text{C}$

(The negative sign only indicates that the charge carriers are negative)

$$\therefore V_H = \frac{3.44 \times 10^{-8} \times 1.0 \times 1 \times 10^{-3} \times 1 \times 10^{-4}}{1 \times 10^{-7}}$$

$$\therefore V_H = 3.44 \times 10^{-8} \text{ V}$$

ii) $R_H = 0.3 \times 10^{-10} \text{ m}^3/\text{C}$

$$\therefore V_H = \frac{0.3 \times 10^{-10} \times 1.0 \times 1 \times 10^{-3} \times 1 \times 10^{-4}}{1 \times 10^{-7}}$$

$$\therefore V_H = 0.3 \times 10^{-10} \text{ V}$$

- The N-type semiconductor is more sensitive to hall effect as more hall voltage is produced in it for the same current and magnetic field.

END... 

8**Magnetism****8.1 : Origin of Magnetism**

Q.1 Explain the origin of magnetic properties of materials.

Ans. : • Magnetic properties of materials are due to electrons in the atoms.

- In atoms, the electrons have orbital angular momentum and spin angular momentum.
- The orbital as well as spin angular momentum are quantized and give rise to orbital magnetic dipole moment and spin magnetic dipole moment respectively.
- The vector addition of these two magnetic dipole moments gives the resultant magnetic dipole moment for an electron.
- The resultant of magnetic dipole moments of all electrons in an atom gives the magnetic dipole moment of an atom and the dipole moments of all atoms in a specimen of the material will give the resultant magnetic dipole moment of that specimen.
- If the resultant magnetic dipole moment produces a magnetic field, the material behaves like a magnet.
- Nuclei also have a magnetic moment known as nuclear magnetic moment. But this moment is about 10^3 times smaller than the magnetic moment due to electrons and hence is neglected.
- When materials are placed in external magnetic fields, the magnetic dipole moments of the electrons are modified.

Q.2 Derive an expression for magnetic moment due to orbital angular momentum of electron. Hence define Bohr magneton.

Ans. : • The orbital motion of an electron around the nucleus is equivalent of a current loop. Every current loop is associated with a magnetic moment.

- The magnetic moment associated with a loop carrying current I and having area A is

$$\mu_L = IA. \quad \dots(1)$$

Let e = charge of an electron and

T = Time period of revolution of electron motion around the nucleus.

- Current is defined as the charge per unit time. Hence the current I associated with this electron motion will be

$$I = \frac{e}{T}$$

- If the electron moves with velocity v in a circular path of radius r around the nucleus,

$$T = \frac{2\pi r}{v}$$

$$\therefore I = \frac{ev}{2\pi r} \quad \dots(2)$$

- The area of current loop is

$$A = \pi r^2 \quad \dots(3)$$

- Substitute equations (2) and (3) in equation (1)

$$\mu_L = \left(\frac{ev}{2\pi r} \right) \times (\pi r^2)$$

$$\therefore \mu_L = \frac{evr}{2}$$

- Multiply and divide by the mass m of the electron.

$$\therefore \mu_L = \left(\frac{evr}{2} \right) \times \frac{m}{m} = \frac{e}{2m} \times mvr$$

$L = m v r$ is the orbital angular momentum of the electron.

$$\therefore \mu_L = \frac{e}{2m} \times L \quad \dots(4)$$

- According to quantum theory, the orbital angular momentum is an integer multiple of $\frac{h}{2\pi}$ where h is the Planck's constant. i.e,

$$L = \frac{nh}{2\pi}$$

$$\therefore \mu_L = \frac{e}{2m} \times \frac{nh}{2\pi}$$

$$\therefore \mu_L = n \left(\frac{eh}{4\pi m} \right) \quad \dots(5)$$

where $n = 1, 2, 3, \dots$ is the principal quantum number.

- The above equation gives the magnetic moment associated with the orbital motion of electron.

Bohr Magneton

- Bohr magneton is defined as the angular momentum of an electron in ground state i.e, with principal quantum number 1. It is denoted by μ_B .

$$\therefore \mu_B = \frac{eh}{4\pi m} \quad \dots(6)$$

8.2 : Types of Magnetic Materials

Q.3 What is diamagnetism ? Explain using Langevin's theory.

Ans. : • The atoms of diamagnetic materials do not possess any net magnetic dipole moment.

- When diamagnetic materials are placed in an external magnetic field, magnetic dipole moments are developed which are directed opposite to the external field. Hence the magnetic flux density inside the material decreases. i.e. the material has a tendency to expel the magnetic flux.
- All materials show diamagnetic property. Ordinary materials are only weakly diamagnetic. Superconductors show very strong diamagnetic property.
- The magnetic susceptibility is negative for diamagnetic materials. When diamagnetic materials are placed in non uniform magnetic

fields, they move from region of larger magnetic field to region of smaller magnetic field. This phenomenon is used in magnetic levitation.

- The induced magnetic dipole moments disappear on switching off the external field. Copper, gold and zinc show diamagnetic properties.

Langevin's Theory of Diamagnetism

- According to Langevin's theory of diamagnetism, the orbital motion of electrons gives rise to diamagnetic properties.
- The orbital motion of electrons gives rise to magnetic moment.
- In an atom of a diamagnetic material, the magnetic moments of all electrons cancel each other as they are in random directions.
- When an external magnetic field is applied, the orbital motion of the electrons in atoms are altered. It causes current loops to develop.
- The magnetic moments produced by these induced current loops are opposite to the applied field in accordance with Lenz's law.
- Based on the above considerations, Langevin derived the equation for susceptibility of a diamagnetic material as,

$$\chi = -\frac{NZe^2\mu_0}{6m}\langle r^2 \rangle$$

where μ_0 = Permeability of free space,

N = Number of atoms per unit volume,

Z = Number of electrons in the atom = atomic number,

e = Charge of an electron,

m = Mass of an electron and

$\langle r^2 \rangle$ = Mean square distance of the electrons from the nucleus.

- From the above equation, it is clear that the diamagnetic susceptibility of a diamagnetic substance is always negative. Also,

it is independent of the temperature and the strength of applied field.

Q.4 What is paramagnetism ? Explain.

Ans. : • In paramagnetic materials, each atom possesses a net magnetic dipole moment.

- In absence of external magnetic field, these dipole moments are randomly oriented due to which the net magnetic dipole moment of the material is zero.
- When placed in a magnetic field, the dipoles tend to get aligned with the field which leads to an increase in magnetic flux density inside it.
- When paramagnetic materials are placed in non uniform magnetic fields, they move towards region of stronger magnetic field.
- The net magnetic dipole moment of the material is lost when the external field is switched off.
- The susceptibility of paramagnetic materials is a small positive value. Salts of iron and nickel show paramagnetism.

Langevin's Theory of Paramagnetism

- According to Langevin's theory of paramagnetism, the magnetic dipole moments get aligned in the direction of the magnetic field. The random thermal motion tends to disturb this alignment making this effect temperature dependent.
- The paramagnetic susceptibility is given by,

$$\chi = \frac{\mu_0 \mu_m^2 N}{3kT} = \frac{C}{T}$$

where, $C = \frac{\mu_0 \mu_m^2 N}{3k}$ is a constant known as Curie constant,

μ_0 = Permeability of free space,

μ_m = Magnetic dipole moment,

N = Number of atoms per unit volume,

k = Boltzmann constant,

T = Absolute temperature.

- Hence the susceptibility of a paramagnetic material is inversely proportional to the temperature. The above equation is known as Curie's law.
- Langevin's theory failed to explain the exact temperature dependence of susceptibility of certain paramagnetic materials like crystals and salts.

Weiss Theory of Paramagnetism

- Weiss assumed that in addition to the externally applied field, the internal molecular field produced by neighboring molecules also acts on the magnetic dipole moment of any molecule.
- According to Weiss theory, the expression for susceptibility of a paramagnetic material is,

$$\chi = \frac{\mu_0 \mu_m^2 N}{3k(T - \theta_c)} = \frac{C}{T - \theta_c}$$

where,

μ_0 = Permeability of free space,

μ_m = Magnetic dipole moment,

$C = \frac{\mu_0 \mu_m^2 N}{3k}$ is the Curie constant,

k = Boltzmann constant,

T = Absolute temperature.

N = Number of atoms per unit volume,

θ_c = Paramagnetic Curie point.

- The above equation is called Curie - Weiss law.

Q.5 Explain ferromagnetism.

Ans. : • The atoms of ferromagnetic materials have a large magnetic dipole moment. In unmagnetized specimen, these magnetic dipole moments are randomly oriented due to which the net magnetic dipole moment of the sample is zero.

- When the specimen is kept in an external magnetic field, these magnetic dipole moments get aligned with the external field to give the specimen a large net magnetic dipole moment.
- On removing the external magnetic field, the material retains the magnetic properties and the material shows permanent magnetism.
- The material loses its magnetic properties on increasing the temperature upto the Curie temperature beyond which it becomes paramagnetic.
- The ferromagnetic materials have a very large positive value of magnetic susceptibility. The magnetic susceptibility changes with temperature above the Curie temperature according to the Curie-Weiss law given by,

$$\chi = \frac{C}{T - \theta} \quad \text{for } T > \theta$$

where C is the Curie constant and θ is the Curie temperature.


- Iron, nickel and cobalt show ferromagnetic properties.

8.3 : Applications of Magnetic Devices

Q.6 Explain how magnetic properties of materials are utilized for recording and reading data.

Ans. : Magnetic recording : • Magnetic recording is based on the concept that data (in the form of sound or optical signal, or in digital form) can be converted to electrical signal which in turn is used to produce a magnetic field that orients magnetic moments in a ferromagnetic material.

- To achieve this, a coil is wound on a ferrite ring with an air gap as shown in Fig. Q.6.1.
- A magnetic tape which consists of a coating of ferromagnetic material on a plastic tape is made to move below the air gap.
- The input signal converted to electrical form is fed to the coil which sets up a magnetic field in the ferrite ring.

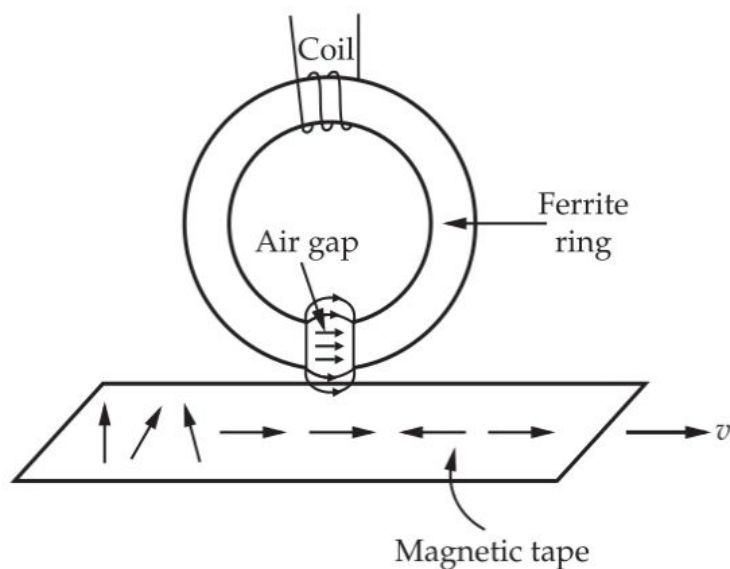**Fig. Q.6.1**

- As the air gap has less permeability than the magnetic material just below it, most of the magnetic flux completes its path through the magnetic material.
- This flux aligns the randomly oriented magnetic moments according to the applied signal in the horizontal direction. This recording method is known as longitudinal recording as the bits are magnetized along the length of the tape.
- For small magnetic fields, the number of dipoles getting aligned with the applied magnetic field increases with the magnitude of the field. This is used in analog recording as in the case of audio recording.
- For sufficiently large magnetic fields, most of the magnetic dipoles get aligned with the applied magnetic field due to saturation. As a result, the number of magnetic dipole moments getting aligned with the applied magnetic field does not change with the field. This condition is used for digital recording.
- To read the data, the tape is made to move under a read head which is similar to the write head. The flux associated with the ring changes as it moves over the aligned magnetic moments and induces current in the coil.

Q.7 Explain the construction and working of a magnetic tape. State its advantages and disadvantages.

Ans. : • Magnetic tapes used for data storage are made up of a plastic strip with a thin layer of ferric oxide. The tape width is typically about half an inch. These are rolled into large reels or smaller cassettes.

- In this type of recording, the magnetic moments are aligned in a vertical direction perpendicular to the plane of the tape. This type of recording increases the data density on the tape.
- The recording head is made up of a ferrite with a coil wound around it as shown in Fig. Q.7.1. There is an air gap in the ferrite with one end sharp and the other flat.

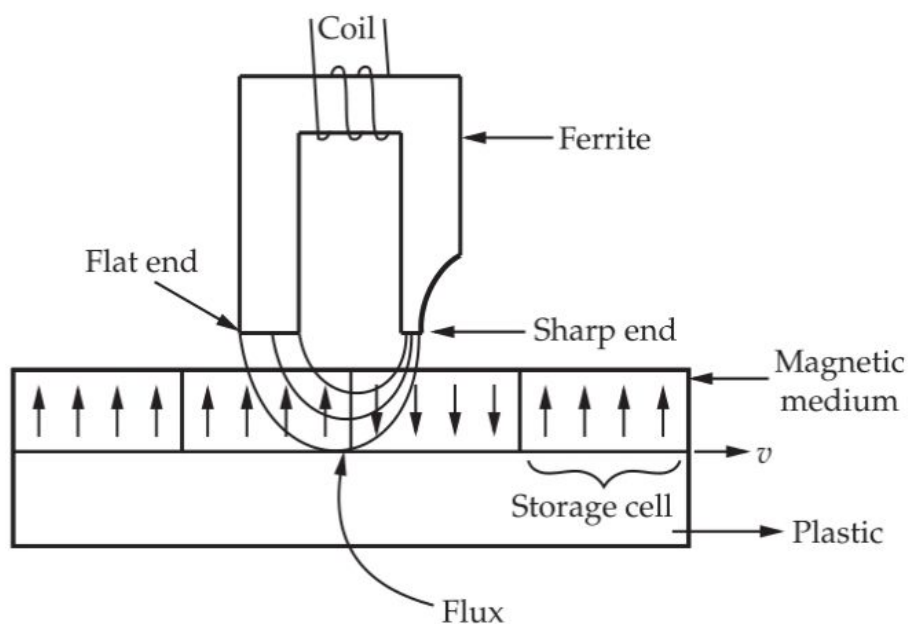


Fig. Q.7.1

- The magnetic flux emerging out from the sharp end is nearly perpendicular to the plane of the tape whereas the flux at the flat end has lower density due to larger area and is not perpendicular to the tape.
- The tape is moved from flat end towards the sharp end so that the flux at the sharp end will be utilized to align the magnetic moments. The data is stored on multiple tracks.

- The data is stored in cells in the form of '0' and '1'. A '0' is represented by one direction of magnetic moments and the opposite direction represents a '1'.
- While reading, voltages of opposite polarity are induced in the coil connected to the ferrite for '0' and '1' when the tape passes below the read head which is similar to the writing head.

Advantages

- 1) Magnetic tapes have very high data storage capacity. They can have capacity of upto 5 tera bytes.
- 2) Low cost.
- 3) Easy to handle and portable.

Disadvantage

- The access to data is sequential. Random access to a particular data on the tape takes longer time as the tape head has to be moved to that position which requires the tape to be either wound or unwound.

Q.8 Explain construction and working of a floppy disk.

Ans. : • Floppy disks are made of thin plastic disk with a coating of magnetic material on it. The disk is enclosed in a thick plastic covering with an opening for the read / write head.

- The opening remains closed until it is inserted into the floppy disk drive.
- The floppy disk is divided into circular concentric tracks as shown in Fig.Q.8.1 where the data is recorded. The disk is divided into sectors as shown.
- The disk is rotated and the write head aligns the

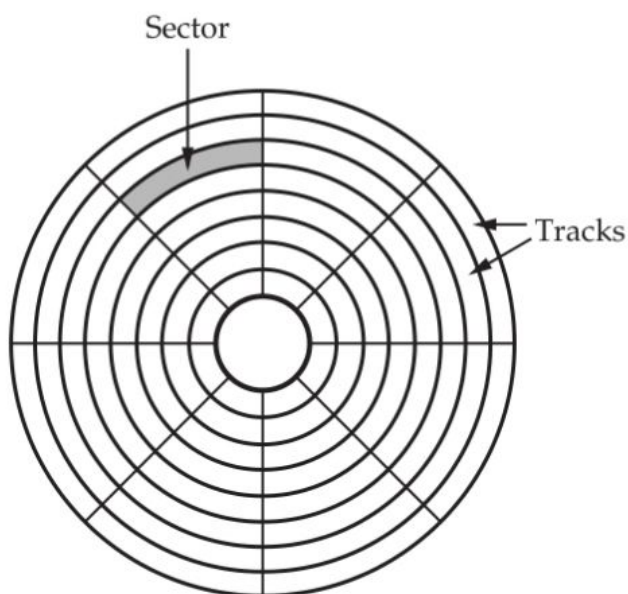


Fig. Q.8.1

magnetic moments on the tracks as it passes over them. The movement of the head is controlled by a servo mechanism.

- The floppy disks have small storage capacity of 1.44 MB. These are now phased out and new computer systems do not have floppy drives. They have been replaced by the optical devices like compact disk (CD) and DVD.

Q.9 Explain construction and working of a hard disk.

Ans. : • Hard disks are magnetic disk drives like the floppy disks but with a larger number of disks.

- A large number of disks mounted on a common central shaft are coated on both sides with a magnetic material except the two outermost disks which are coated only on the inner side.
- One read / write head is provided per surface as shown in Fig. Q.9.1.

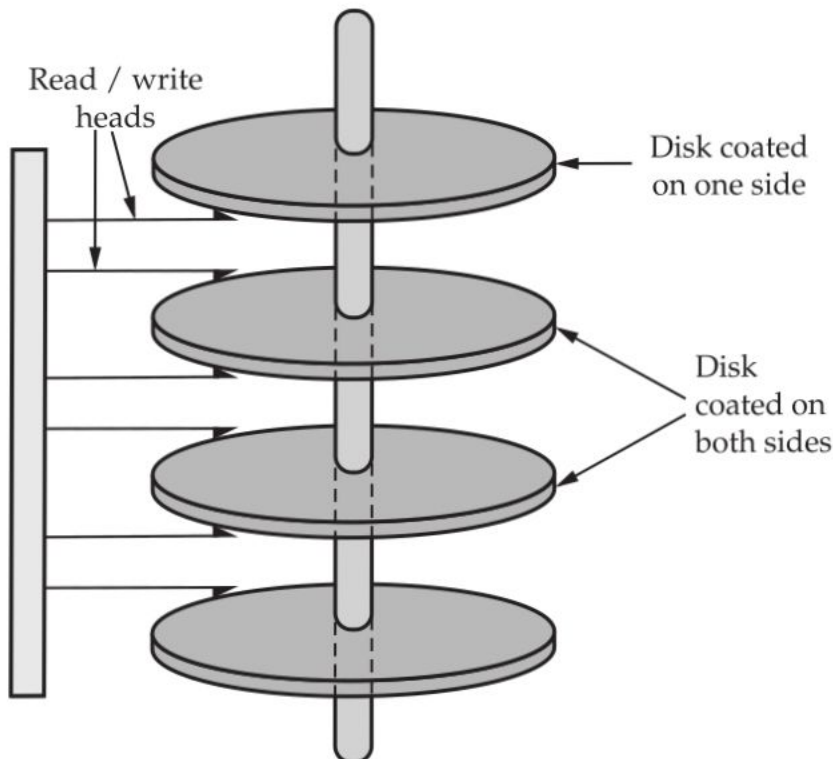


Fig. Q.9.1

- The read / write operation is similar to that in floppy disks. Each disk is divided into tracks and sectors. The write head aligns the magnetic moments on the tracks as it passes over the track.

- Vertical alignment of magnetic moments is used for higher storage density.
- Data can be stored on both sides of the disks. Hence these hard disks have a very large storage capacity. Hard disks with capacity upto 5 tera bytes (TB) have become available in the market.
- These are available as both internal hard disks which are used inside computer systems or as external disks.

END... ✍

9**Superconductivity****9.1 : Properties of Superconductors****Q.1 What is superconductivity ?**

Ans. : For certain materials, like mercury, the resistivity suddenly drops to zero at very low temperature typically near the boiling point of liquid helium. This phenomenon is known as superconductivity.

Q.2 Explain zero electrical resistance property of superconductor.

☞ [SPPU : Dec.-16, Marks 2]

Ans. : Zero electrical resistance property :

- The electrical resistivity of superconductors is zero.
- The experimental testing of zero resistance was tried by connecting the specimen at room temperature to a battery. A voltmeter was connected across the specimen as shown in Fig. Q.2.1 to measure the potential difference across the specimen.

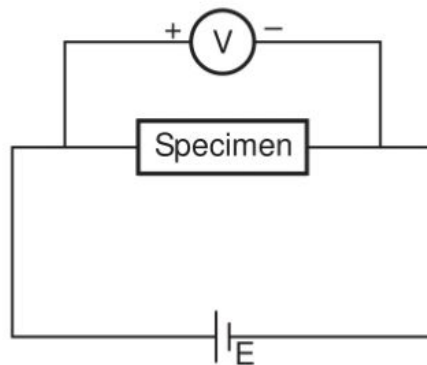


Fig. Q.2.1

- The temperature of the specimen is then lowered.
- It was observed that below a particular temperature, known as the critical temperature, the potential difference across the specimen suddenly dropped to zero.

Isotope effect : Refer Q.5

Q.3 State and explain :

a) Meissner effect b) Persistent current

👉 [SPPU : Dec-12, May-15, Marks 3]

Ans. :

a) Meissner effect :

- When a specimen is placed in a weak magnetic field and cooled below the critical temperature, the magnetic flux originally present in the specimen is ejected from the specimen as shown in Fig. Q.3.1. This effect is known as Meissner effect.

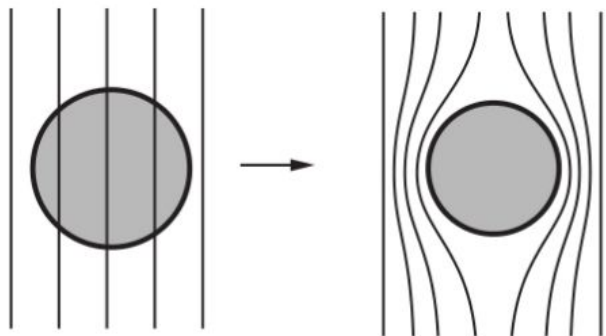
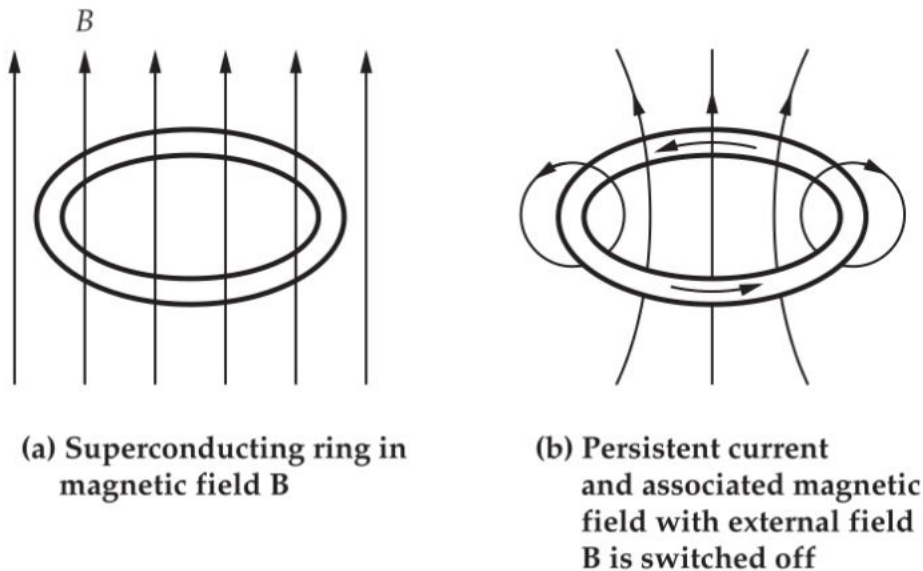


Fig. Q.3.1

- This effect is reversible and the specimen returns to its normal state when its temperature is raised above its critical temperature. Thus superconductors act as perfect diamagnets with zero magnetic induction in the interior when placed in weak magnetic fields.
- This indicates perfect diamagnetism.
- Meissner effect cannot be explained by assuming that the superconductor is a perfect conductor with zero electrical conductivity.
- Due to Meissner effect, superconductors strongly repel external magnets which leads to magnetic levitation.

b) Persistent current :

- When a superconducting ring is placed in a magnetic field and the field is switched off, a current is induced in the ring as shown in Fig Q.3.2.

**Fig. Q.3.2**

- The magnitude of current remains constant even though there is no source of e.m.f. as the resistance of the superconducting ring is zero.
- Such steady currents flowing in a superconductor are called persistent currents. These currents flowing in the ring produce a magnetic field.
- Thus superconducting rings can be used to produce magnetic fields which do not require any power supply to maintain a constant field.

Q.4 Explain Meissner effect and critical magnetic field for superconductivity.

☞ [SPPU : May-13, Marks 6]

Ans. : For Meissner effect, refer Q.3.

Critical magnetic field :

- Superconductivity is destroyed by sufficiently strong magnetic fields.

- The minimum value of the applied magnetic field required to destroy superconductivity is called the critical field H_c and is a function of temperature.
- Above the critical temperature, $H_c = 0$.
- Below critical temperature the variation of H_c with temperature ' T ' is as shown in Fig. Q.4.1 and can be represented by the equation

$$H_c = H_0 \left[1 - \left(\frac{T}{T_c} \right)^2 \right]$$

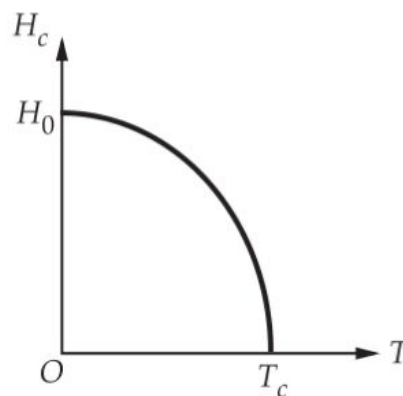


Fig. Q.4.1

where H_0 is the critical field at absolute zero.

Q.5 Explain the isotope effect and its significance.

👉 [SPPU : Dec.-05, Marks 4]

Ans. : • According to observations, the critical temperature of superconductors varies with isotopic mass. The critical temperature is smaller for larger isotopic mass.

- This phenomenon is known as isotope effect. The relation between critical temperature ' T_c ' and isotopic mass ' M ' is given by,

$$T_c M^{1/2} = \text{Constant}$$

or $T_c \propto M^{-1/2}$

- As lattice vibrations are reduced for larger isotopic masses, the isotope effect indicates that superconductivity is due to interaction between electrons and lattice vibrations.

Q.6 Show that superconductors are perfectly diamagnetic.

Ans. : • The magnetic induction inside the specimen in the normal state is given by,

$$B = \mu_0(H + M) \quad \dots (1)$$

where ' H ' is the externally applied magnetic field and ' M ' is the magnetization inside the specimen.

- When the temperature 'T' of the specimen is lowered below its critical temperature ' T_c ',

$$B = 0$$

$$\therefore \mu_0(H + M) = 0$$

$$H = -M$$

- The susceptibility χ is given by,

$$\chi = \frac{M}{H}$$

$$\therefore \chi = -1 \quad \dots (2)$$

- As the relative permeability $\mu_r = 1 + \chi$

$$\therefore \mu_r = 0$$

This indicates perfect diamagnetism.

- Meissner effect cannot be explained by assuming that the superconductor is a perfect conductor with zero electrical conductivity. The electric field is given by,

$$E = \frac{V}{l} = \frac{IR}{l} = \frac{IR}{l} \times \frac{A}{A} = \frac{RA}{l} \cdot \frac{I}{A}$$

$$\therefore E = \rho J \quad \dots (3)$$

where ρ = Resistivity

and J = Current density

- If ρ becomes zero for a finite current density J , then $E = 0$.

From Maxwell's equations,

$$\nabla \times \vec{E} = - \frac{d\vec{B}}{dt}$$

$$\text{As } E = 0, \frac{d\vec{B}}{dt} = 0$$

$$\therefore \vec{B} = \text{Constant}$$

$\therefore$ In a conductor the flux cannot change on cooling below the critical temperature. This contradicts Meissner effects according to which the flux must reduce to zero and hence superconductor is not just a perfect conductor.

Q.15 Superconducting tin (Sn) has a critical temperature of 3.7 K at zero magnetic field and a critical field of 0.0306 tesla at 0 K. Find the critical field at 2 K.

Ans. :

$$H_c = H_0 \left[1 - \left(\frac{T}{T_c} \right)^2 \right]$$

As $H_c = \frac{B_c}{\mu_0}$ and $H_0 = \frac{B_0}{\mu_0}$,

$$B_c = B_0 \left[1 - \left(\frac{T}{T_c} \right)^2 \right]$$

$$B_0 = 0.0306 \text{ T}$$

$$T_c = 3.7 \text{ K}$$

$$T = 2 \text{ K}$$

$$B_c = 0.0306 \left[1 - \left(\frac{2}{3.7} \right)^2 \right]$$

$\therefore$

$$B_c = 0.02166 \text{ T}$$

Q.16 Calculate the critical current for a wire of lead having a diameter of 1 mm at 4.2 K. Critical temperature of lead is 7.18 K and H_c at 0 K is 6.5×10^4 A/m.

Ans. :

$$H_c = H_0 \left[1 - \left(\frac{T}{T_c} \right)^2 \right]$$

$$H_0 = 6.5 \times 10^4 \text{ A/m}$$

$$T_c = 7.18 \text{ K}$$

$$T = 4.2 \text{ K}$$

$$H_c = 6.5 \times 10^4 \left[1 - \left(\frac{4.2}{7.18} \right)^2 \right] = 4.276 \times 10^4$$

A/m

$$I_c = 2 \pi r H_c$$

$$r = 0.5 \text{ mm} = 0.5 \times 10^{-3} \text{ mm}$$

$$\therefore I_c = 2 \pi \times 0.5 \times 10^{-3} \times 4.27 \times 10^4$$

$$\therefore \boxed{I_c = 134.33 \text{ A}}$$

Q.17 The critical temperature for a metal with isotopic mass 199.5 is 4.185 K. Calculate the isotopic mass if the critical temperature falls to 4.133 K. Assume $\alpha = 0.5$.

Ans. :

$$T_c M^\alpha = \text{Constant}$$

$$\alpha = 0.5$$

$$\therefore T_c M^{0.5} = \text{Constant}$$

$$T_{c1} M_1^{0.5} = T_{c2} M_2^{0.5}$$

$$T_{c1} = 4.185 \text{ K} ; M_1 = 199.5 ; T_{c2} = 4.133 \text{ K}$$

$$4.185 \times 199.5^{0.5} = 4.133 \times M_2^{0.5}$$

$$\therefore \boxed{M_2 = 204.55}$$

Q.18 The critical temperature for lead is 7.2 K. However at 5 K it loses its superconductivity when subjected to a magnetic field of $3.3 \times 10^4 \text{ A/m}$. Find the maximum value of critical magnetic field which will allow the metal to retain its super conductivity at 0 K.

 [SPPU : May-18, Marks 3]

Ans. : Given data :

$$T_c = 7.2 \text{ K}, T = 5 \text{ K},$$

$$H_c = 3.3 \times 10^4 \text{ A/m}$$

Formula :

$$H_c = H_0 \left[1 - \left(\frac{T}{T_c} \right)^2 \right]$$

$$3.3 \times 10^4 = H_0 \left[1 - \left(\frac{5}{7.2} \right)^2 \right]$$

$\therefore$

$$H_0 = 6.37 \times 10^4 \text{ A/m}$$

9.2 : BCS Theory

Q.19 Explain BCS theory of super-conductivity.

 [SPPU : Dec-12, Marks 4]

Ans. : • Superconductivity was explained by Bardeen, Cooper and Schrieffer on the basis of quantum theory. This theory which is named after the three scientists is known as the BCS theory.

- When a free electron passes near an ion in a lattice, there is coulomb attraction between them. This causes deformation of the lattice.
- A second free electron passing nearby, takes advantage of the deformation to lower its energy.
- Thus the second electron interacts attractively with the first through the lattice deformation.
- This interaction is called electron - lattice - electron interaction which can be considered to take place through phonons.
- The quantum of lattice vibrational energy is called phonon, similar to quantum of electromagnetic which energy which is called photon.
- The first electron emits a phonon which is absorbed by the second electron.
- Electrons in such an interaction have same energy and equal and opposite spins. Such pairs of electrons coupled together through a phonon are called Cooper pairs.
- The attraction between electrons in a Cooper pair is very weak and the pair can be separated by a small increase in temperature which causes thermal vibrations.
- At very low temperature, density of Cooper pairs is large and they move collectively through the lattice which minimizes collisions.
- Also, due to large density of Cooper pairs, their velocity is small even for large currents.

- Due to small velocity and the collective movement of the Cooper pairs, collisions are reduced and resistivity decreases.
- The BCS theory was able to explain the critical field, the isotope effect and the Meissner effect.
- It could also explain the quantization of magnetic field in a superconducting ring with effective charge ' $2e$ ' instead of ' e ' as the ground state in BCS theory consists of pairs of electrons.

Q.20 Explain in brief the BCS theory of superconductivity.

 [SPPU : Dec.-15, Marks 4]

Ans. : Refer Q.19.

Q.21 Explain BCS theory of superconductivity. Mention why superconductivity is observed below critical temperature.

 [SPPU : May-16, Marks 6]

Ans. : Refer Q.19.

Q.22 Explain the formation of cooper pairs in superconductors with the help of electron phonon interaction.

 [SPPU : Dec.-17, 18, Marks 3]

Ans. : Refer Q.19.

Q.23 What is superconductivity ? Explain BCS theory of superconductors.

 [SPPU : May-18, Marks 6]

Ans. : Refer Q.1 and Q.19.

9.3 : Types of Superconductors

Q.24 Explain the phenomena of super-conductivity. Explain type-I and type-II super-conductors.

 [SPPU : Dec-12, Marks 6]

Ans. : For explanation of phenomenon of super-conductivity, refer Q.1.

Type-I Superconductors (Soft superconductors)

- The magnetization curve for a Type-I superconductor is shown in Fig. Q.24.1.

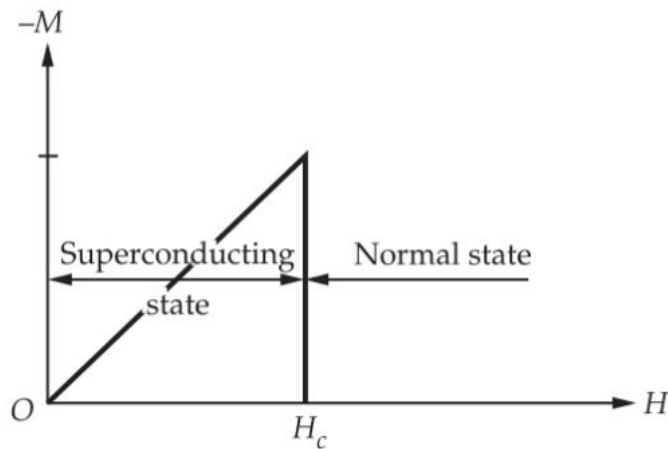


Fig. Q.24.1

- Type-I superconductors show complete Meissner effect when the applied magnetic field H is less than the critical field H_c .
- The magnetization in the specimen is proportional to the applied field and the specimen acts like a perfect diamagnet.
- For $H > H_c$, the magnetization is negligible and the specimen becomes a normal conductor.
- Pure elements show such magnetization curves. The values of H_c are very low.

Type-II Superconductors (Hard superconductors)

- The magnetization curve for a type-II superconductor is shown in Fig. Q.24.2.

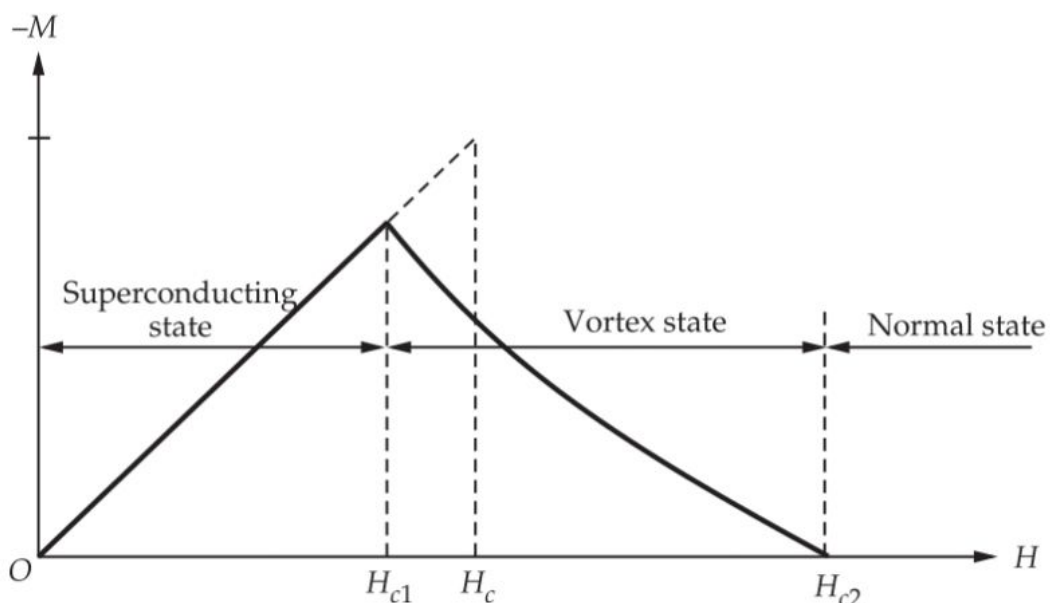


Fig. Q.24.2

- Type-II superconductors are characterized by two critical fields H_{c1} and H_{c2} .
- Upto the lower critical field H_{c1} the specimen is perfectly diamagnetic and flux is completely ejected out from the specimen.
- The magnetization in the specimen is proportional to the applied field. Between H_{c1} and H_{c2} , Meissner effect is incomplete but electrically the specimen is a superconductor.
- This state is called the mixed state or the vortex state as the specimen is electrically a superconductor but not magnetically.
- The values of H_{c2} may be 100 times or more higher than the critical field H_c for type-I superconductors.
- Above the higher critical field H_{c2} , the specimen becomes a normal conductor.
- Type-II superconductors are usually alloys or transition metals with high values of electrical resistivity in the normal state.

Q.25 Differentiate between type-I and type-II superconductor with diagram.

👉 [SPPU : May-13, 15 Marks 4]

OR Differentiate between type-I and type-II superconductor with diagram. (Any three points)

👉 [SPPU : Dec-13, Marks 3]

Ans. : For diagrams, refer Q.24.

Sr.No.	Type - I superconductor	Type - II superconductor
1	There is only one critical field.	There are two critical fields.
2	They show complete Meissner effect when the applied magnetic field H is less than the critical field H_c .	Upto the lower critical field H_{c1} the specimen is perfectly diamagnetic. Between H_{c1} and H_{c2} , Meissner effect is incomplete but electrically the specimen is a superconductor.
3	There is no vortex state.	There is a vortex state.

4	These are normally pure elements.	These are usually alloys or transition metals with high values of electrical resistivity in the normal state.
---	-----------------------------------	---

Q.26 Explain critical magnetic field of superconductor. Differentiate between type-I and type-II superconductors (four points).

☞ [SPPU : May-17, Marks 6]

Ans. : Refer Q.24 and Q.25.

Q.27 Give any four points to distinguish between type I and type II superconductors.

☞ [SPPU : May-18, 19, Marks 4]

Ans. : Refer Q.25.

9.4 : High Temperature Superconductors

Q.28 What are high temperature superconductors ? Explain.

Ans. : • Kamerlingh Onnes discovered superconductivity in mercury in 1911 with a critical temperature of 4.2 K.

- Research was then focussed on materials with larger critical temperatures so that the phenomenon could become commercially viable.
- But, till about 1986, the highest critical temperatures were observed to be nearly 20 K.
- In 1986, an oxide of lanthanum, barium and copper ($\text{La}_{1.85}\text{Ba}_{0.15}\text{CuO}_4$) was observed to have a critical temperature of 36 K.
- In 1987, an oxide of yttrium, barium and copper ($\text{YBa}_2\text{Cu}_3\text{O}_7$) was found to have a critical temperature of 90 K and then an oxide of thallium, barium, calcium and copper ($\text{Tl}_2\text{Ba}_2\text{Ca}_2\text{Cu}_3\text{O}_{10}$) was found to have a critical temperature of 120 K.
- The main feature of these high temperature superconductors is the presence of parallel sheets of CuO_2 .

- Efforts are going on to find superconductors with critical temperatures near room temperature.

9.5 : Josephson Effect

Q.29 Explain D.C. and A.C. Josephson effect.

👉 [SPPU : Dec-13, Marks 4]

Ans. : • Two superconductors separated by a thin layer of insulator is called a weak link or Josephson junction.

- The superconducting electron pairs (Cooper pairs) tunnel through the insulating layer from one superconductor to another.
- The following two effects are observed due to this tunneling of electron pairs :

D.C. Josephson effect : In absence of any electric or magnetic field, a d.c. current flows across the junction.

A.C. Josephson effect : Radio frequency current oscillations are produced across the junction when a d.c. voltage is applied across it. Also, when a radio frequency voltage is applied along with the d.c. voltage, it can cause d.c. current across the junction.

- If a d.c. voltage 'V' is applied across the junction, the current oscillates with frequency

$$\nu = \frac{2eV}{h}$$

- Josephson junctions are used in superconducting quantum interference devices (SQUIDS) which are used as diagnostic tools in detecting brain signals.

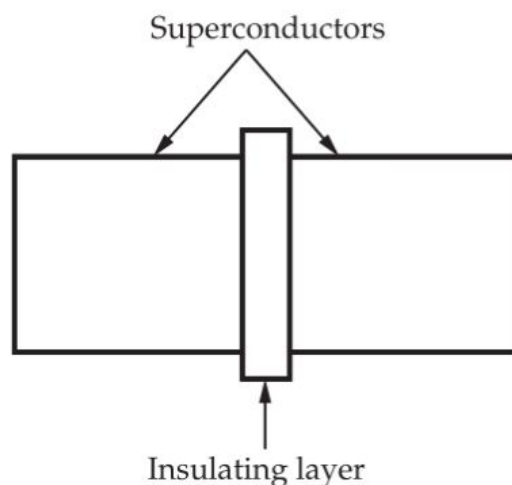


Fig. Q.29.1 Josephson junction

9.6 : Applications of Superconductors

Q.30 Explain two applications of superconductivity.

 [SPPU : May-13, Dec-14, Marks 3]

Ans. : 1) Magnetic levitation :

- When a magnet is brought near a superconducting coil, current is induced in the superconductor which in turn produces a magnetic field which repels the magnet.
- The magnet can thus be made to float in air (i.e., levitate) on the superconducting coil.
- This phenomenon is called magnetic levitation.
- This concept has been used in the development of Maglev trains (i.e., magnetic levitation trains) which can attain speeds of upto 500 km/h as there is no friction between the rails and the wheels.

2) Superconducting magnets :

- Solenoids made of superconducting wires can generate strong magnetic fields without consuming large amount of power.
- As superconductors can carry much larger current densities without energy loss, the superconducting magnets will be light weight and compact.

Q.31 Explain the applications of superconductors in the field of electronics.

 [SPPU : May-16, Marks 3]

Ans. : • In integrated circuits, there is generation of heat in interconnecting metal films due to their resistance. Also, their finite resistance makes the charging and discharging of capacitors slow. The use of superconductors will decrease heat loss and make the charging and discharging of capacitors very fast.

- This will make the circuits work faster and will make it possible to increase the density of components very fast switching times have been obtained using superconductors in digital electronic circuits. This will increase the speed of digital communication. Very sensitive microwave detectors, magnetometers and SQUIDS have been developed using Josephson junctions.

Q.32 Give any six applications of superconductivity.

 [SPPU : Dec.-15, Marks 3]

OR State any six applications of superconductors.

 [SPPU : May-14, 19, Marks 3]

Ans. :

- 1) Superconductors are used in magnetic levitation trains.
- 2) Superconductors are used in superconducting magnets.
- 3) They can be used in superconducting transmission lines.
- 4) They can be used in superconducting bearings.
- 5) Superconductors are used in IC fabrication.
- 6) They are used in supercomputers.

Q.33 Explain any one application of superconductors in brief.

 [SPPU : Dec.-16, Marks 3]

OR State applications of superconductors. Explain any one application.

 [SPPU : May-17, Marks 3]

Ans. : Refer Q.30, Q.31 and Q.32.

END... 

10**Non-Destructive Testing****10.1 : Testing Methods**

Q.1 Compare destructive and non-destructive testing.

Ans. :

Sr. No	Destructive Testing	Non-Destructive Testing
1.	The component is destroyed	The component is not destroyed.
2.	All components cannot be tested	All components can be tested.
3.	Tests are more time consuming.	Testing is rapid.
4.	Testing during operation is not possible.	Testing during operation is possible.
5.	Test results are quantitative	Test results are generally qualitative.

10.2 : Types of Defects

Q.2 List the various types of defects.

Ans. : • The following types of defects are required to be detected as they affect the performance of components :

- 1) Surface cracks
- 2) Surface irregularities
- 3) Internal cracks
- 4) Presence of impurities or air bubbles

- 5) Variation in dimensions
- 6) Creep : It is the permanent deformation of a component when subjected to constant load for a long time.
- 7) Fatigue : It is the failure of a material due to repeated cycles of loading and unloading.

10.3 : Objectives of Non-Destructive Testing

Q.3 List the objectives of non-destructive testing.

Ans. : • The objectives of non-destructive testing are as follows :

- 1) To detect flaws during the manufacturing of components so that defective components can be detected at an early stage of production. This saves time and money.
- 2) To detect flaws of finished components which will enhance their performance and reliability.
- 3) To detect flaws which may develop during operation which will ensure that there is no reduction in the rate of production
- 4) To increase the safety by ensuring that the defective components are replaced during periodic checks.

10.4 : Methods of Non-Destructive Testing

Q.4 List the methods of non-destructive testing.

Ans. : • The following methods are used for non-destructive testing :

- 1) Liquid/dye penetrant test
- 2) Radiography methods :
 - a) x-ray radiography and b) γ -ray radiography.
- 3) Ultrasonic inspection
- 4) Magnetic particle inspection.
- 5) Visual inspection
- 6) Eddy current inspection.
- 7) Thermography.

10.5 : Acoustic Emission Testing

Q.5 Describe acoustic emission testing. State its advantages and disadvantages.

Ans. : • Acoustic emission is defined as the generation of an elastic wave due to rapid release of energy within the material.

- If a structure is subjected to change in pressure, temperature or load, some sites within the structure develop more deformation than its surrounding regions. This leads to release of energy in the form of stress waves.
- The stress waves propagate to the surface of the structure and can be detected by sensors.
- Such acoustic emission is also observed when iron, tin or ceramics are cooled from high temperatures.
- Acoustic emission also takes place due to development of cracks and breaking of fibres in a stressed material. Hence, these can also be detected by sensors.
- The sensors are piezo-electric crystals which are placed in arrays. They can detect the presence of defects and also locate their position.
- For example, if two sensors are placed at some distance from each other and acoustic emission takes place at the centre of the line joining them, the time interval between each sensor receiving the signal will be zero. If the acoustic emission takes place towards one of the detector, there will be some time interval between the each sensor receiving the signal. The position of the site of acoustic emission can be obtained from this time interval.
- This method gives real time data on development of cracks and breaking of fibres within the structure.
- This method is used in bridges, dams and aerospace structures.

Advantages :

- 1) Gives real time data during operation of the structure.
- 2) This method is highly sensitive.
- 3) Leads to early detection of flaws.
- 4) Cost is less.
- 5) There is no need to shut down the structure as the sensors are mounted permanently on the structure which continuously monitor it.

Disadvantages :

- 1) Requires the loading to be sufficiently high to produce a significant signal.
- 2) Requires sensors to be permanently mounted on the structure.

10.6 : X-ray Radiography

Q.6 Describe X-ray radiography method for non-destructive testing of engineering components. State its advantages and disadvantages.

Ans. : • X-ray have high penetration power. The smaller the wavelength, larger is the penetration power.

- When x-rays are passed through metals, the intensity decreases due to absorption.
- Larger the distance travelled by x-rays in the metal, larger is the decrease in intensity and smaller is the transmitted intensity.
- The decrease in intensity also depends on the density of the material.
- If x-rays are passed through a metal piece containing a flaw (e.g an air bubble) as shown in Fig. Q.6.1, larger intensity of x-rays will be transmitted through that region due to small thickness of metal in that region compared to surrounding region.
- The x-ray film kept behind the object will become darker in the region of the flaw as shown in Fig. Q.6.1.

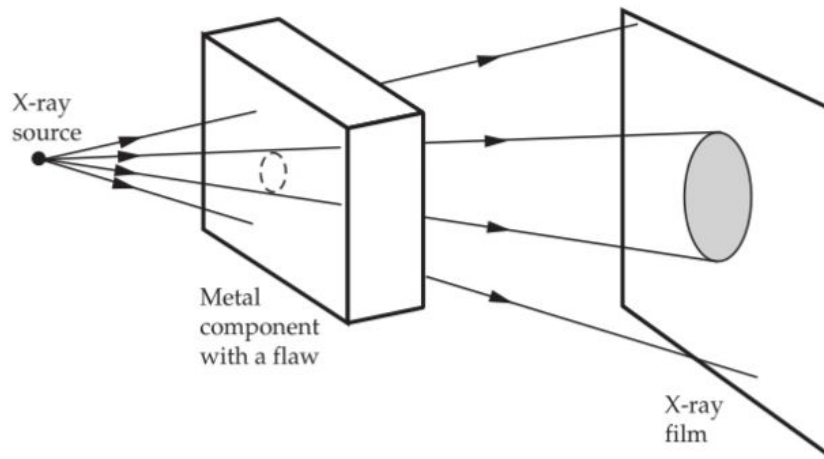


Fig. Q.6.1

- This is similar to the x-rays of human body in which the bones appear transparent on the film as they block the x-rays and remaining regions are darker.
- This method is able to reveal the flaws hidden in the interior of the component.
- If x-ray image is taken for only one position of the source, the flaw can be detected but its position cannot be located.
- To locate position of the flaw, the image is taken for two positions of the source as shown in Fig. Q.6.2

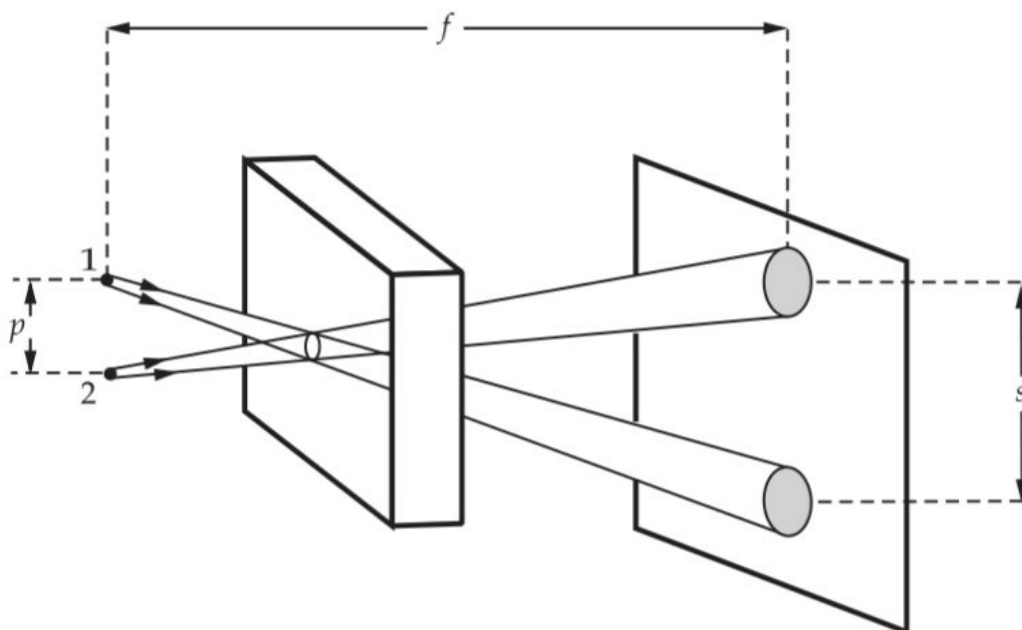


Fig. Q.6.2

If f = Distance between source and film,
 p = Distance between two positions of source
and s = Distance between the two image,

The depth d of the flaw from the upper surface is given by

$$d = \frac{fs}{s+p}$$

- A similar approach is used in x-ray fluoroscopy except that the x-ray film is replaced by a fluorescent screen.
- This method gives live images of the components.
- Instead of x-rays, γ -rays can also be used to form images.

Advantages :

- 1) Hidden flaws can be detected.
- 2) Inspection takes very little time.
- 3) A wide variety of materials can be tested.

Disadvantages :

- 1) It is expensive compared to other methods.
- 2) Inspection has to be carried out in an isolated place as long exposure to x-rays is harmful to human beings.
- 3) Very small flaws cannot be detected.

10.7 : Ultrasonic Inspection Method
--

Q.7 Describe the ultrasonic testing method of flow detection. State its advantages and disadvantages.

Ans. : • Ultrasonic flaw detection technique uses the property of ultrasonic waves that they get partially reflected from any boundary separating two media having different densities.

- The time interval between the transmission of an ultrasonic pulse and the arrival of an echo is proportional to the distance of the boundary separating the two media from the transducer.

- An ultrasonic pulse is transmitted into the specimen from one end by an ultrasonic transducer like quartz crystal which also performs the function of a receiver.
- In absence of any flaw, the pulse is reflected from the other end of the specimen and the two pulses are displayed on a C.R.O. as shown in Fig. Q.7.1.

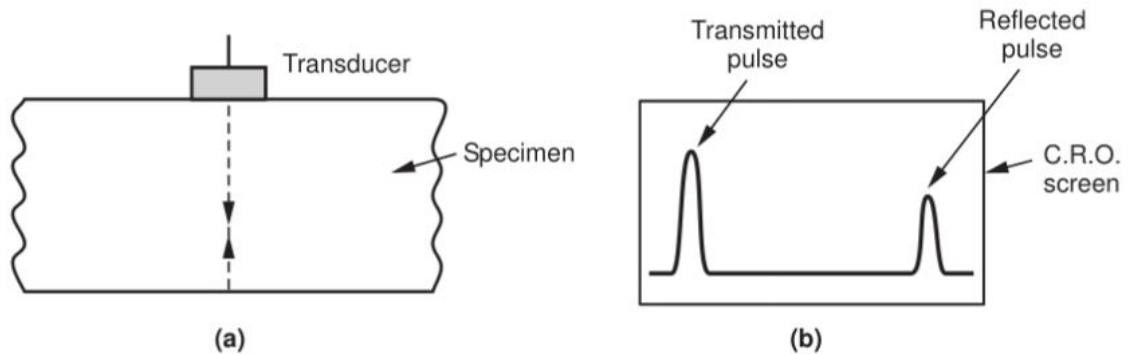


Fig. Q.7.1

- The distance between the two pulses on the C.R.O. screen can be calibrated in terms of the distance travelled by the ultrasonic waves in the specimen.
- If there is a flaw, an additional peak will be seen between the transmitted pulse and the pulse reflected from the other end as shown in Fig. Q.7.2.

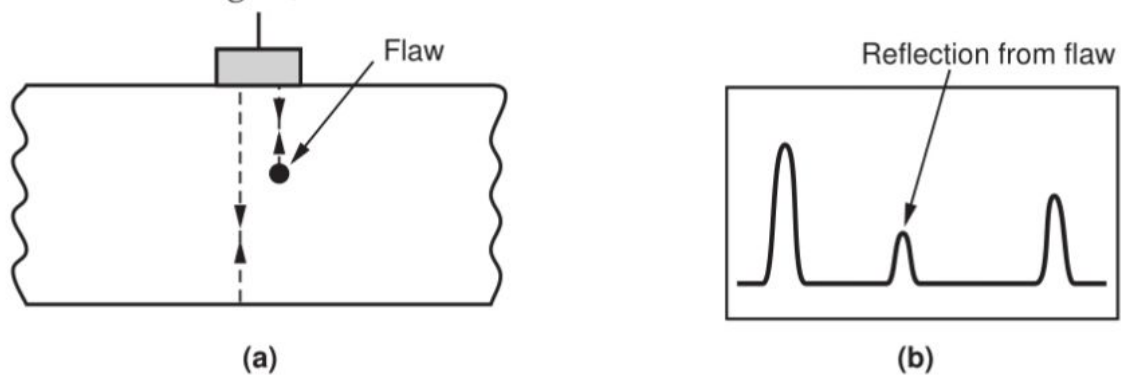


Fig. Q.7.2

- From the distance between transmitted pulse and the pulse corresponding to the flaw on the C.R.O. screen, the distance of the flaw from the surface through which ultrasonic wave was transmitted can be obtained.

- The position and dimensions of the flaw can be obtained by moving the transducer on the specimen surface and finding the distance of the flaw from different locations on the specimen surface.
- The ultrasonic flaw detection method is used in automobile, aircraft, railway and shipping industries to test machine parts and rails for flaws.
- Three types of visual display units are used in ultrasonic inspection. They are known as A-scan display, B-scan display and C-scan display .
- The A-scan display shows peaks corresponding to transmitted and reflected pulses as shown in Fig. Q.7.2 (b).
- The B-scan display gives a two dimensional cross sectional view. It gives two horizontal lines corresponding to reflection from top and bottom surfaces and additional lines in between if there are flaws as shown in Fig. Q.7.3.

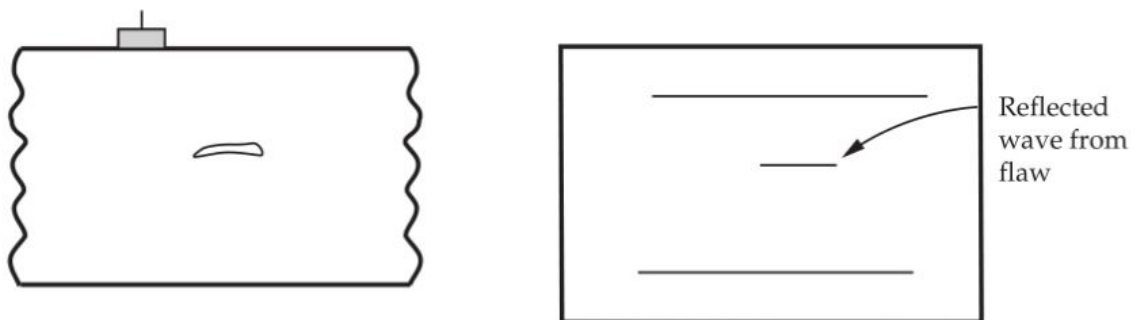


Fig. Q.7.3

- The C-scan display gives image similar to an x-ray in which the shape of the flaw is visible in two dimensions as shown in Fig. Q.7.4.

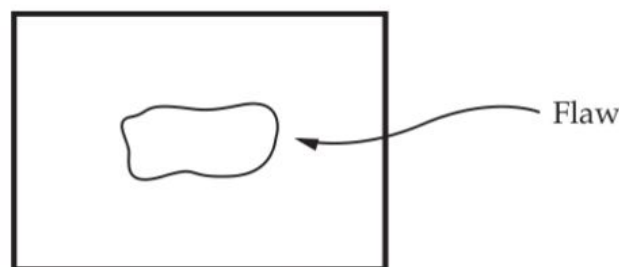


Fig. Q.7.4

Advantages :

- 1) Components with larger thicknesses can be tested compared to x-ray radiography.
- 2) This method is more accurate.
- 3) Low cost
- 4) High speed
- 5) Small flaws can also be detected.

Disadvantages :

- 1) Surface of the component needs to be smooth.
- 2) Very thin specimens cannot be tested.
- 3) Specimen must have homogeneous composition.
- 4) Defects very close to the surface are not detected.

END... ✍

11**Nanotechnology****11.1 : Nano-particles**

Q.1 What are nano-particles ? Explain.

Ans. : • The radii of atoms and most of the molecules are less than a nanometer.

- Nanoparticles are generally considered to have radius in the range of 1 nm to 100 nm which can have 25 to 10^6 atoms. A cluster of 1 nm radius has approximately 25 atoms.
- This definition of nanoparticles based on size does not distinguish between molecules and nanoparticles as many organic molecules contain more than 25 atoms.
- Nanoparticles can be more appropriately defined as an aggregate of atoms between 1 nm and 100 nm with dimensions less than the characteristic length of some physical phenomena.
- When particle size is less than the characteristic length of some physical phenomena, the particles show different properties.
- The nanoparticles show unique properties that change with their size.
- Classical mechanics is able to explain properties of bulk materials but is unable to explain properties of nanoparticles.
- Quantum mechanical principles have to be used to explain properties of the nanoparticles.
- The state of matter around the nanosize is known as **mesoscopic state**.

11.2 : Quantum Confinement

Q.2 Explain quantum confinement and its effect on allowed energies for electrons in various types of quantum structures.

Ans. : • Density of states is the possible electron quantum energy states between energies E and $E+dE$ per unit volume. The density of states for metals in three dimensions in a bulk material is given by

$$g(E) = \frac{8\sqrt{2} \pi m^{3/2}}{h^3} E^{1/2}$$

- Hence, the density of states increases with energy as shown in Fig. Q.2.1 (a). From the above equation, we can conclude that the density of states in a bulk material is proportional to $E^{1/2}$ and hence increases with energy.
- If the electrons are confined in one or more directions by reducing the dimensions of the material in those directions, the density of states changes due to quantization of energy.
- For a quantum well, which is a material reduced in one dimension to nano - scale, there is quantization of energy due to confinement of electrons in one direction. The density of states for a quantum well is given by,

$$g(E) = \frac{4 \pi m}{h^2}$$

- Hence, the density of states for a given quantum state will be constant as shown in Fig. Q.2.1(b)(ii). For the different quantum states, it has different constant values as shown in Fig. Q.2.1(b)(iii).
- For a quantum wire, which is a material reduced in two dimensions to nano - scale, there is quantization of energy due to confinement of electrons in two directions. The density of states for a quantum wire is given by

$$g(E) = \frac{2 \sqrt{2} m^{1/2}}{h^3} E^{-1/2}$$

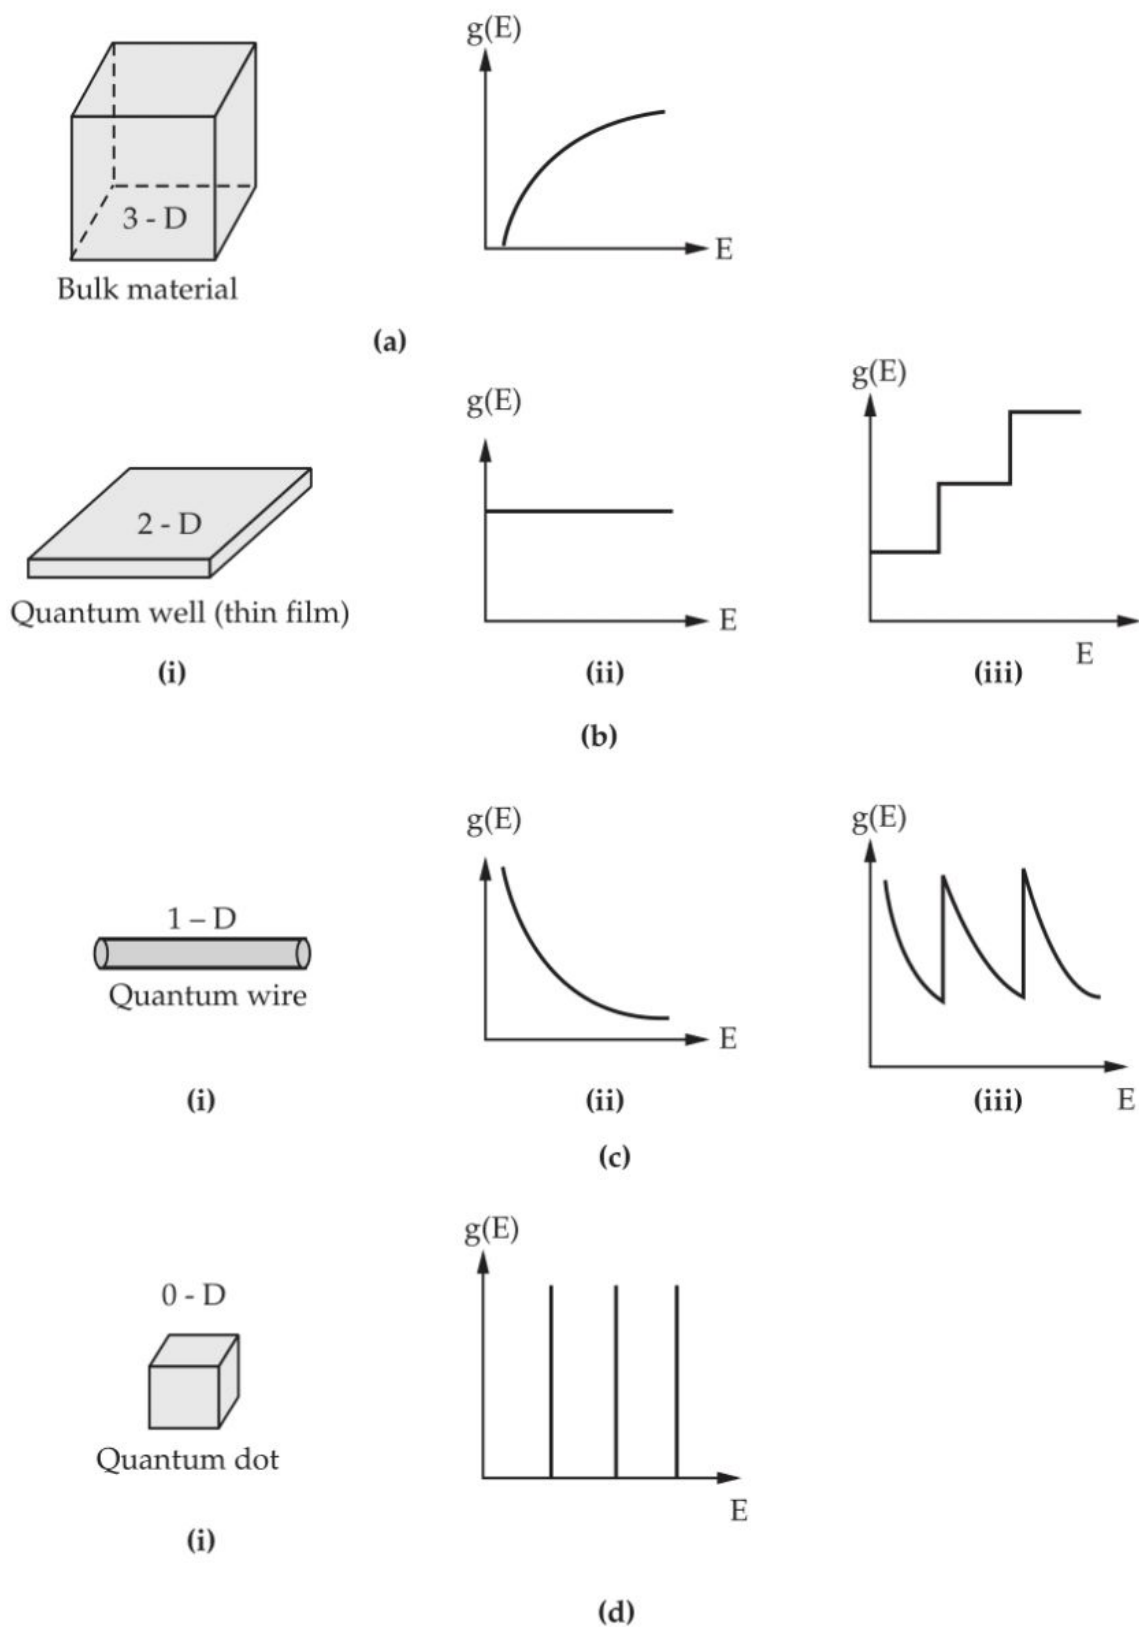


Fig. Q.2.1

- Hence, the density of states for a given quantum state will decrease with increasing energy as shown in Fig. Q.2.1 (c)(ii). For the different quantum states, it has variation as shown in Fig. Q.2.1 (c)(iii).
- For a quantum dot, which is a material reduced in all three dimensions to nano - scale, there is quantization of energy due to confinement of electrons in all the directions. Hence, for a quantum dot, only some discrete energy states are allowed for the electrons. As only certain energy states are allowed, the density of states has a discrete structure as shown in Fig. Q.2.1 (d).

11.3 : Surface to Volume Ratio

Q.3 Describe the effect of surface to volume ratio on properties of nanomaterials.

Ans. : • When particle size decreases, the fraction of atoms on the surface to the total number of atoms increases.

- Hence, nanomaterials have larger fraction of atoms at the surface compared to bulk materials.
- Also, the surface energy per unit mass is larger for nanomaterials.
- The surface to volume ratio, which represents the fraction of the atoms on the surface, is larger for nanomaterials.
- The large surface to volume ratio is responsible for higher reactivity of nanomaterials and also their energy band structure.

11.4 : Properties of Nanoparticles

Q.4 Explain optical, electrical and mechanical properties of nanoparticles.

Ans. : 1) Optical properties :

- The colour of nanoparticles is different from the bulk material.

- When a bulk material is reduced in size to a few hundred atoms, the energy band structure of the bulk material changes to a set of discrete energy levels.
- Atomic clusters of different sizes will have different energy level separations.
- As clusters of different sizes have different energy level separations, the colour of the clusters (which are due to transitions between the energy levels) will depend on their size.
- Hence the size of the cluster can be altered to change the colour of a material.
- For example, gold in bulk form appears yellow but gold nanoparticles appear bright red in colour.
- The medieval glass makers produced tinted glass with beautiful variety of colours by dissolving metal particles like gold, silver, cobalt, iron etc.
- Due to these metal nanoparticles, the glasses appear coloured.
- In semiconductor nanoparticles (which are used in quantum dots) there is significant shift in the optical absorption spectra towards blue as the particle size is reduced.

2) Electrical properties :

- The resistivity in bulk matter is mainly due to scattering of electrons by ions and crystal defects.
- In nanostructures, the resistivity mainly depends on scattering from boundaries of nanoparticles when particle size becomes less than the mean free path between collisions.
- Thus smaller particle size increases the resistivity.
- Various types of defects in the lattice also increase the resistivity by limiting the mean free path. But many nanostructures are too small to have internal defects.

- Another effect of reduced size is the confinement of conduction electrons. In bulk conductors, the electrons move freely throughout the entire conductor.
- The situation changes when one or more dimensions of the conductor are made very small.
- In a **quantum well**, the electron will be confined along one dimension but will move freely along the remaining two dimensions.
- If a conducting wire has a long length but very small diameter, the electrons can move freely along the length but will be confined in two mutually perpendicular transverse directions. This configuration is known as a **quantum wire**.
- If all the three dimensions of the conductor are in nanometer range, the configuration is called a **quantum dot** and the electron is confined in all the three dimensions.
- Confinement of electrons to small dimensions leads to quantization of energy.
- The level of doping in semiconductors gives rise to another important phenomenon.
- For typical doping levels of 1 donor impurity atom in 10^8 atoms of semiconductor atoms, a quantum dot of 10^7 semiconductor atoms would have an average of 10^{-1} electrons.
- In other words, on an average, one quantum dot in 10 will have a free electron.
- These result in the phenomena of single-electron tunneling and coulomb blockade.
- The conduction is due to tunneling of electrons through the quantum dot. The electrons are blocked from tunneling except at discrete voltage change positions.
- This phenomenon is called coulomb blockade.

- The I - V characteristic shown in Fig. Q.4.1 is called coulomb staircase.

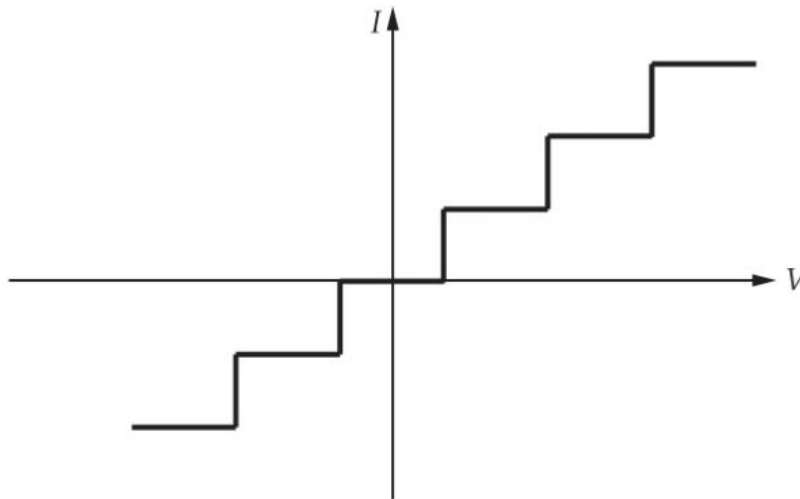


Fig. Q.4.1

3) Mechanical properties :

- Mechanical properties like hardness, elasticity and ductility depend upon the bonds between atoms.
- Imperfections in the crystal structure and impurities result in changes in these properties.
- As the nanoparticles are highly pure and free from imperfections, they show different mechanical properties than the bulk material.
- It has been observed that the Young's modulus decreases in metallic nanocrystals with decrease in particle size.
- The yield stress has been observed to increase with the decrease in grain size in bulk materials with nanosized grains.
- Hence stronger materials can be produced by making materials with nanosized grains.
- The carbon nanotubes are estimated to be about 20 times stronger than steel.

Q.5 Explain any two properties of nano-particles in brief.

👉 [SPPU : Dec.-15, Marks 4]

Ans. : Refer Q.4.

Q.6 Why are the properties of nano-particles different from that of the bulk materials ? Explain any two properties of nano-particles.

 [SPPU : May-16, Marks 6]

Ans. : Refer Q.4.

Q.7 Explain the mechanical property of nano-particles.

 [SPPU : Dec.-16, Marks 2]

Ans. : Refer Q.4.

Q.8 What is nano technology ? Explain optical and electrical properties of nano-particles.

 [SPPU : May-17, Marks 6]

Ans. : Refer Q.1 and Q.4.

Q.9 Explain the mechanical properties of nanoparticles.

 [SPPU : Dec.-17, Marks 3]

Ans. : Refer Q.4.

Q.10 Explain the optical and electrical properties of nanoparticles.

 [SPPU : May-18,19, Marks 6]

Ans. : Refer Q.4.

11.5 : Applications of Nanoparticles

Q.11 Explain applications of nanoparticles.

Ans. : Nanotechnology has found wide ranging applications in many fields. Some of these applications are discussed below.

1) Electronics : Nanosized electronic components show unique properties which are different from the larger semiconductor components. The semiconductor devices are based on the concept of charge transport only whereas the nanosized components work on the concept of charge as well as spin transport of electrons. This has been used in devices like spin FET, spin LED etc. These devices have increased the data

storage capacities of hard disks and have led to small and faster microprocessors.

- 2) **Energy** : Attempts are being made to increase the efficiency of solar cells by using nanotechnology. Another important area of research is the use of hydrogen as a fuel. The main problem with hydrogen is that it is highly combustible and hence cannot be stored easily. Efforts are being made to use carbon nanotubes to trap and store hydrogen.

Nanoparticles are also being used to increase the energy density of rechargeable batteries. Which are used in laptops and mobile phones.

- 3) **Automobiles** : Nanotube composites have better mechanical strength compared to steel but are costly at present. Efforts are being made to develop cheaper nanotube composites that can replace steel which is used to construct the body structure of automobiles. Use of nanoparticles in paints provides thin and smooth coatings.

Nanoparticles are being used to develop light weight and less rubber consuming tyres for automobiles which will increase the mileage of the automobiles. The use of carbon nanotubes for storing hydrogen is being explored so that the automobiles can be run on hydrogen as a fuel.

Nanonmaterial catalysts can be used as catalysts to convert the harmful emissions from automobiles to less harmful gases.

- 4) **Space and defence** : Aerogels are porous materials with nanosized pores. They have very low density and are poor conductors of heat. They can be used in spacecrafts, light weight suits and jackets.

Polymer composites using silica fibers and nanoparticles have larger mechanical strength and low temperature coefficient of expansion. They can be used in spacecrafts which have to withstand high temperature and stress conditions during launching and re-entry into the earth's atmosphere.

Satellites and spacecrafts use solar energy.

The efficiency of solar cells can be increased using nanoparticles. The use of nanoparticles will also make the solar cells smaller in size and light weight.

- 5) **Medical** : Nanoparticles can be used for detection and treatment of cancers and tumours. The nanoparticles are injected into the body and guided towards a specific part. Drugs can be encapsulated in nanocapsules and guided towards any specific part where the drug can be delivered in a controlled manner by opening the capsule at a desired rate using magnetic fields or infrared light. This targeted drug delivery does not affect the healthy organs. Nanotechnology based tests are being developed for fast detection of viruses and antibodies.
- 6) **Environmental** : Nanoparticle based sensors are capable of detecting water and air pollution due to toxic ions and pesticides with a very high sensitivity. Nanomaterial catalysts can be used as catalysts to convert the harmful emissions from industries and automobiles to less harmful gases.

Nanotubes can be used to store hydrogen fuel which, when used in automobiles, will reduce harmful emissions.
- 7) **Textiles** : The use of nanotechnology in textile industry has led to the development of water repellent and wrinkle free clothes.
- 8) **Cosmetics** : Zinc oxide and titanium oxide nanoparticles are used in sunscreen lotions which protect the skin from the ultraviolet radiations. These nanoparticles absorb ultraviolet radiations. Nanoparticle based dyes and colours are harmless to the skin and hence are used in hair creams, gels and hair dyes.

Q.12 Explain the applications of nano-particles in electronic industry.

👉 [SPPU : Dec.-15, Marks 6]

Ans. : Refer Q.11.

Q.13 Explain the applications of nano-particles in the field of automobiles.

👉 [SPPU : May-16, Marks 3]

Ans. : Refer Q.11.

Q.14 Explain the application of nano particles in medical and automobile field.

☞ [SPPU : Dec.-16, Marks 3]

Ans. : Refer Q.11.

Q.15 State applications of nano-particles. Explain any one application.

☞ [SPPU : May-17,19, Marks 3]

Ans. : Refer Q.11.

Q.16 List the applications of nanotechnology in the field of automobile. Explain any one application in brief.

☞ [SPPU : May-18, Marks 3]

Ans. : Refer Q.11.

END... ✍

**SOLVED SAMPLE QUESTION PAPER - 1 [END SEM]
[AS PER 2019 PATTERN]**

Time : $2\frac{1}{2}$ Hours]

[Maximum Marks : 70

Instructions to the candidates :

- (1) Answer Q.1 or Q.2, Q.3 or Q.4, Q.5 or Q.6, Q.7 or Q.8
- (2) Neat diagrams must be drawn wherever necessary.
- (3) Figure to the right indicate full marks
- (4) Make suitable assumptions if necessary

Physical Constants :

Avogadro number = 6.023×10^{23} g/mole

Charge on electron (e) = 1.6×10^{-19} C

Planck's constant (h) = 6.63×10^{-23} J s

Mass of electron (m_e) = 9.1×10^{-31} kg

Velocity of light in vacuum (c) = 3×10^8 m/s

Q.1 a) *Deduce Schrödinger's time dependent wave equation.*

(Refer Q.54 of Chapter 6)

[7]

b) *What is the difference between phase velocity and group velocity ? Show that the de Broglie wave group associated with a moving particle travels with the same velocity as the particle. (Refer Q.29 and Q.30 of Chapter 6)*

[7]

c) *An electron is bound by a potential which closely approaches an infinite square well of width $1 \text{ \AA}$. Calculate the lowest three permissible energies (in electron volts) the electron can have. (Refer Q.61 of Chapter 6)*

[4]

OR

Q.2 a) *Derive an expression for the energy levels of a particle enclosed within an infinite deep potential well. Show necessary waveforms. (Refer Q.55 of Chapter 6)*

[7]

- b) What do you understand by the wave function of a moving particle ? Explain the physical significance and state the conditions satisfied by a physically acceptable wave function.
(Refer Q.45 and Q.46 of Chapter 6) [7]
- c) Calculate the minimum uncertainty in the velocity of an electron confined to a box of length $10 \text{ \AA}$.
(Refer Q.41 of Chapter 6) [4]
- Q.3** a) Explain Hall effect in semiconductors. Drive equation for Hall voltage and Hall coefficient.
(Refer Q.39 of Chapter 7) [7]
- b) Explain the formation of depletion region in a semiconductor diode. Derive expression for barrier potential.
(Refer Q.33 and Q.35 of Chapter 7) [6]
- c) Calculate the conductivity of a germanium sample if a donor impurity is added to the extent of one part in 10^7 Ge atoms at room temperature.
Given : Avagadro number $N_a = 6.02 \times 10^{23}$ atoms/gm-mole
Atomic weight of Ge = 72.6, Mobility $\mu_e = 3800 \text{ cm}^2/\text{V-sec}$,
Density of Ge = 5.32 gm/cc. (Refer Q.20 of Chapter 7) [4]

OR

- Q.4** a) Using expressions for concentration of charge carriers in n-type semiconductor, derive expression for the position of Fermi level. Explain its variation with temperature.
(Refer Q.31 of Chapter 7) [7]
- b) Explain the construction and working of a solar cell. Draw its I-V characteristics and define its important parameters.
(Refer Q.37 of Chapter 7) [6]
- c) A copper specimen having length 1 meter, width 1 cm and thickness 1 mm is conducting 1 ampere current along its length and is applied with a magnetic field of 1 tesla along its thickness. It experience Hall effect and a Hall voltage of

0.074 microvolts appear along its width. Calculate the Hall coefficient and the mobility of electrons in copper. Conductivity of copper is $\sigma = 5.8 \times 10^7 (\Omega \text{ m})^{-1}$.

(Refer Q.41 of Chapter 7) [4]

Q.5 a) What are Cooper pairs ? Explain BCS theory of superconductivity. **(Refer Q.19 of Chapter 9)** [7]

b) How are magnetic materials classified ? Compare their properties. **(Refer Q.3, Q.4 and Q.5 of Chapter 8)** [7]

c) Calculate the critical current for a wire of lead having a diameter of 1 mm at 4.2 K. Critical temperature of lead is 7.18 K and H_c at 0 K is $6.5 \times 10^4 \text{ A/m}$.

(Refer Q.16 of Chapter 9) [4]

OR

Q.6 a) Discuss the origin of magnetic properties of materials on the atomic scale. **(Refer Q.1 and Q.2 of Chapter 8)** [7]

b) Explain Meissner effect. Prove that superconductors are perfect diamagnets, i.e., they have susceptibility -1 and relative permeability zero.

(Refer Q.3 and Q.6 of Chapter 9) [7]

c) Describe the construction and working of SQUID.

(Refer Q.29 of Chapter 9) [4]

Q.7 a) Explain x-ray radiography for non destructive testing. State its advantages and disadvantages.

(Refer Q.6 of Chapter 10) [7]

b) Explain the use of nanoparticles in the field of medicine and in space applications. **(Refer Q.11 of Chapter 11)** [6]

c) State the objectives of non-destructive testing (NDT).

(Refer Q.3 of Chapter 10) [4]

OR

- Q.8** a) *Explain electrical properties of nanoparticles.*
(Refer Q.4 of Chapter 11) [7]
- b) *Discuss acoustic emission testing in detail.*
(Refer Q.5 of Chapter 10) [6]
- c) *Explain the effect of surface to volume ratio on properties of nanoparticles. (Refer Q.3 of Chapter 11)* [4]

**SOLVED SAMPLE QUESTION PAPER - 2 [END SEM]
[AS PER 2019 PATTERN]**

Time : $2\frac{1}{2}$ Hours]

[Maximum Marks : 70

- Q.1** a) *Explain the concept of group velocity and wave velocity. Show that group velocity is equal to the velocity of particle.*
(Refer Q.29 and Q.30 of Chapter 6) [7]
- b) *Derive equation of energy and wave function when a free particle is trapped in an infinite potential well.*
(Refer Q.55 of Chapter 6) [7]
- c) *Compute the minimum uncertainty in the location of a 2 gm mass moving with a speed of 1.5 m/s and the minimum uncertainty in the location of an electron moving with a speed of 0.5×10^8 m/s, given that the uncertainty in the momentum is $\Delta p = 10^{-3} p$ for both.*
(Refer Q.38 of Chapter 6) [4]

OR

- Q.2** a) *Derive Schrödinger time independent wave equation.*
(Refer Q.52 of Chapter 6) [7]
- b) *Draw the first three eigen functions and the corresponding probability distributions for a particle enclosed in a non-rigid box. Using these results, explain tunneling effect and the working of a tunnel diode.*
(Refer Q.69 and Q.70 of Chapter 6) [7]

- c) Determine the velocity and kinetic energy of a neutron having de Broglie wavelength $1 \text{ \AA}$. Mass of neutron = $1.67 \times 10^{-27} \text{ kg}$. (Refer Q.8 of Chapter 6) [4]

Q.3 a) Using expressions for concentration of charge carriers in intrinsic semiconductor, derive expression for the position of Fermi level. Explain its variation with temperature. (Refer Q.30 of Chapter 7) [7]

- b) Explain the classification of solids into conductors, insulators and semiconductors on the basis of energy band theory. (Refer Q.5 of Chapter 7) [6]

- c) A slab of copper 2.0 mm in thickness and 1.5 cm wide is placed in a uniform magnetic field with magnitude 0.40 T. When a current of 75 amp flows along the length, the voltage measured across the width is $0.81 \mu\text{V}$. Determine the concentration of mobile electrons in copper. (Refer Q.42 of Chapter 7) [4]

OR

Q.4 a) What is fermi energy level ? Explain the working of p-n junction diode on the basis of fermi energy level in unbiased, forward biased and reverse biased modes. (Refer Q.12 and Q.33 of Chapter 7) [7]

- b) What is Hall effect ? Obtain an expression for the Hall voltage and for the Hall coefficient. (Refer Q.39 of Chapter 7) [6]

- c) Calculate the band gap energy in silicon given that it is transparent to radiation of wavelength greater than $11000 \text{ \AA}$. (Refer Q.6 of Chapter 7) [4]

Q.5 a) *Classify magnetic materials on the basis of their permeability.*
(Refer Q.3, Q.4 and Q.5 of Chapter 8) [7]

b) *Explain the origin of magnetic properties of materials. Derive an expression of Bohr magneton.*
(Refer Q.1 and Q.2 of Chapter 8) [7]

c) *State applications of superconductors.*
(Refer Q.32 of Chapter 9) [4]

OR

Q.6 a) *Explain the phenomenon of superconductivity. Distinguish between type-I and type-II superconductors.*
(Refer Q.25 of Chapter 9) [7]

b) *Explain the various magnetic storage devices.*
(Refer Q.7, Q.8 and Q.9 of Chapter 8) [7]

c) *Superconducting tin (Sn) has a critical temperature of 3.7 K at zero magnetic field and a critical field of 0.0306 tesla at 0 K. Find the critical field at 2 K.*
(Refer Q.15 of Chapter 9) [4]

Q.7 a) *Describe the ultrasonic testing method of flaw detection. List the limitations of the method.*
(Refer Q.7 of Chapter 10) [7]

b) *Explain optical properties of nanoparticles.*
(Refer Q.4 of Chapter 11) [6]

c) *State the advantages of non-destructive testing.*
(Refer Q.1 of Chapter 10) [4]

OR

Q.8 a) *What are nanoparticles ? Explain use of nanoparticles in the field of electronics and automobiles.*
(Refer Q.1 and Q.11 of Chapter 11) [7]

- b) Compare destructive and non-destructive testing. Mention the various NDT methods. (Refer Q.1 of Chapter 10) [6]
- c) Explain the concept of quantum confinement. (Refer Q.2 of Chapter 11) [4]

**SOLVED SAMPLE QUESTION PAPER - 3 [END SEM]
[AS PER 2019 PATTERN]**

Time : $2\frac{1}{2}$ Hours]

[Maximum Marks : 70

- Q.1** a) State and explain Heisenberg's uncertainty principle. Show that it is also applicable to energy and time. (Refer Q.36 of Chapter 6) [7]
- b) What is the difference between phase velocity and group velocity ? Show that the de Broglie wave group associated with a moving particle travels with the same velocity as the particle. (Refer Q.28 and Q.30 of Chapter 6) [7]
- c) Explain the principle and working of a scanning tunneling microscope. (Refer Q.71 of Chapter 6) [4]

OR

- Q.2** a) What is wave function ? Give physical significance of $|\psi|^2$. State the conditions which are to be satisfied by a well behaved wave function. (Refer Q.45 and Q.46 of Chapter 6) [7]
- b) Deduce Schrödinger's time independent wave equation. (Refer Q.52 of Chapter 6) [7]
- c) Calculate the energy required to excite the electron from its ground state to fourth excited state in rigid box of length 0.1 nm. (Refer Q.67 of Chapter 6) [4]

- Q.3** a) Using expressions for concentration of charge carriers in p-type semiconductor, derive expression for the position of Fermi level. Explain its variation with temperature.
(Refer Q.32 of Chapter 7) [7]
- b) Explain the classification of solids into conductors, insulators and semiconductors on the basis of energy band theory.
(Refer Q.5 of Chapter 7) [6]
- c) Calculate the mobility of charge carriers in a doped silicon whose conductivity is 100 per Ω -m and the Hall coefficient is $3.6 \times 10^{-4} \text{ m}^3/\text{coulomb}$. (Refer Q.44 of Chapter 7) [4]

OR

- Q.4** a) Explain Hall effect in semiconductors. Drive equation for Hall voltage and Hall coefficient.
(Refer Q.39 of Chapter 7) [7]
- b) Explain the formation of depletion region in a semiconductor diode. Derive expression for barrier potential.
(Refer Q.33 and Q.35 of Chapter 7) [6]
- c) What is Fermi level ? Explain Fermi-Dirac probability distribution function.
(Refer Q.11 and Q.12 of Chapter 7) [4]
- Q.5** a) Classify magnetic materials on the basis of their permeability.
(Refer Q.3, Q.4 and Q.5 of Chapter 8) [7]
- b) What are Cooper pairs ? Explain BCS theory of superconductivity. (Refer Q.19 of Chapter 9) [7]
- c) State applications of superconductors.
(Refer Q.32 of Chapter 9) [4]

OR

- Q.6** a) Explain Meissner effect. Prove that superconductors are perfect diamagnets, i.e., they have susceptibility -1 and relative permeability zero.
(Refer Q.3 and Q.6 of Chapter 9) [7]
- b) Explain the various magnetic storage devices.
(Refer Q.7, Q.8 and Q.9 of Chapter 8) [7]
- c) The critical temperature for lead is 7.2 K. However at 5 K it loses its superconductivity when subjected to a magnetic field of 33×10^4 A/m. Find the maximum value of critical magnetic field which will allow the metal to retain its superconductivity at 0 K. (Refer Q.18 of Chapter 9) [4]
- Q.7** a) Explain electrical properties of nanoparticles.
(Refer Q.4 of Chapter 11) [7]
- b) Explain the use of nanoparticles in the field of medicine and in space applications. (Refer Q.11 of Chapter 11) [6]
- c) Explain the effect of surface to volume ratio on properties of nanoparticles. (Refer Q.3 of Chapter 11) [4]

OR

- Q.8** a) Explain x-ray radiography for non destructive testing. State its advantages and disadvantages.
(Refer Q.6 of Chapter 10) [7]
- b) Discuss acoustic emission testing in detail.
(Refer Q.5 of Chapter 10) [6]
- c) State the objectives of non-destructive testing (NDT).
(Refer Q.3 of Chapter 10) [4]

**SOLVED SAMPLE QUESTION PAPER - 4 [END SEM]
[AS PER 2019 PATTERN]**

Time : $2\frac{1}{2}$ Hours]

[Maximum Marks : 70

Q.1 a) *Explain the concept of group velocity and wave velocity. Show that phase velocity is greater than the velocity of light. (Refer Q.28 and Q.29 of Chapter 6)* [7]

b) *What do you understand by the wave function of a moving particle ? Explain the physical significance and state the conditions satisfied by a physically acceptable wave function. (Refer Q.45 and Q.46 of Chapter 6)* [7]

c) *The lowest energy of an electron trapped in a rigid box is 4.19 eV. Find the width of the box in A.U. (Refer Q.65 of Chapter 6)* [4]

OR

Q.2 a) *Derive an expression for the energy levels of a particle enclosed within an infinite deep potential well. Show necessary waveforms. (Refer Q.55 of Chapter 6)* [7]

b) *Starting from de-Broglie hypothesis, derive Schrödinger's time independent wave equation. (Refer Q.52 of Chapter 6)* [7]

c) *Explain the concept of quantum computing. (Refer Q.72 of Chapter 6)* [4]

Q.3 a) *What is fermi energy level ? Explain the working of p-n junction diode on the basis of fermi energy level in unbiased, forward biased and reverse biased modes. (Refer Q.12 and Q.33 of Chapter 7)* [7]

b) *Explain the construction and working of a solar cell. Draw its I-V characteristics and define its important parameters. (Refer Q.37 of Chapter 7)* [6]

- c) A specimen having length 1.00 cm, width 1.00 mm and thickness 0.1 mm is made to conduct with 1.00 mA current and is placed in a magnetic field of 1.0 Wb/m^2 , acting along the thickness. Calculate the hall voltage in case of
- i) N type semiconductor with hall coefficient of $-3.44 \times 10^{-8} \text{ m}^3/\text{C}$ and ii) Aluminum with hall coefficient of $-0.3 \times 10^{-10} \text{ m}^3/\text{C}$. Which of these materials is more sensitive to hall effect ? Why ? **(Refer Q.45 of Chapter 7)** [4]

OR

- Q.4** a) Using expressions for concentration of charge carriers in intrinsic semiconductor, derive expression for the position of Fermi level. Explain its variation with temperature.
(Refer Q.30 of Chapter 7) [7]
- b) What is Hall effect ? Obtain an expression for the Hall voltage and for the Hall coefficient.
(Refer Q.39 of Chapter 7) [6]
- c) Calculate the number of acceptor atoms that need to be doped in germanium sample to obtain the resistivity of $8 \text{ } \Omega\text{cm}$.
[Given : mobility $\mu = 1600 \text{ cm}^2/\text{V}\cdot\text{s}$]
(Refer Q.29 of Chapter 7) [4]
- Q.5** a) Explain the origin of magnetic properties of materials. Derive an expression of Bohr magneton.
(Refer Q.1 and Q.2 of Chapter 8) [7]
- b) Explain Meissner effect. Prove that superconductors are perfect diamagnets, i.e., they have susceptibility -1 and relative permeability zero.
(Refer Q.3 and Q.6 of Chapter 9) [7]
- c) State applications of superconductors.
(Refer Q.32 of Chapter 9) [4]

OR

Q.6 a) Explain the phenomenon of superconductivity. Distinguish between type-I and type-II superconductors.
(Refer Q.1 and Q.25 of Chapter 9) [7]

b) What is paramagnetism ? Explain.
(Refer Q.4 of Chapter 8) [7]

c) Describe the construction and working of SQUID.
(Refer Q.29 of Chapter 9) [4]

Q.7 a) What are nanoparticles ? Explain use of nanoparticles in the field of electronics and automobiles.
(Refer Q.11 of Chapter 11) [7]

b) Explain optical properties of nanoparticles.
(Refer Q.4 of Chapter 11) [6]

c) State the advantages of non-destructive testing.
(Refer Q.1 of Chapter 10) [4]

OR

Q.8 a) Describe the ultrasonic testing method of flaw detection. List the limitations of the method. (Refer Q.7 of Chapter 10) [7]

b) Discuss acoustic emission testing in detail.
(Refer Q.5 of Chapter 10) [6]

c) Explain the concept of quantum confinement.
(Refer Q.2 of Chapter 11) [4]

**SOLVED SAMPLE QUESTION PAPER - 5 [END SEM]
[AS PER 2019 PATTERN]**

Time : $2\frac{1}{2}$ Hours]

[Maximum Marks : 70

Q.1 a) What is wave function ? Give physical significance of $|\psi|^2$.
State the conditions which are to be satisfied by a well behaved wave function.
(Refer Q.45 and Q.46 of Chapter 6) [7]

- b) *State and explain Heisenberg's uncertainty principle. Show that it is also applicable to energy and time.*

(Refer Q.36 of Chapter 6) [7]

- c) *Calculate the energy (in eV) with which a proton has to acquire de-Broglie wavelength of $0.1 \text{ \AA}$*

(Refer Q.25 of Chapter 6) [4]

OR

- Q.2** a) *Deduce Schrödinger's time independent wave equation.*

(Refer Q.52 of Chapter 6) [7]

- b) *Explain the concept of group velocity and wave velocity. Show that group velocity is equal to the velocity of particle.*

(Refer Q.29 and Q.30 of Chapter 6) [7]

- c) *Explain the principle and working of a scanning tunneling microscope.* **(Refer Q.71 of Chapter 6)** [4]

- Q.3** a) *Using expressions for concentration of charge carriers in n-type semiconductor, derive expression for the position of Fermi level. Explain its variation with temperature.*

(Refer Q.31 of Chapter 7) [7]

- b) *Explain the formation of depletion region in a semiconductor diode. Derive expression for barrier potential.*

(Refer Q.33 and Q.35 of Chapter 7) [6]

- c) *Explain construction and working of solar cell. Also draw I-V characteristics of solar cell and define fill factor.*

(Refer Q.37 of Chapter 7) [4]

OR

- Q.4** a) *Explain the formation of energy bands on the basis of Kronig-Penney model.* **(Refer Q.4 of Chapter 7)** [7]

- b) *Derive expressions for conductivity of intrinsic and extrinsic semiconductors.* **(Refer Q.19 of Chapter 7)** [6]

- c) Calculate the mobility of charge carriers in a doped silicon whose conductivity is 100 per $\Omega\text{-m}$ and the Hall coefficient is $3.6 \times 10^{-4} \text{ m}^3/\text{coulomb}$. (Refer Q.45 of Chapter 7) [4]

Q.5 a) Explain the phenomenon of superconductivity. Distinguish between type-I and type-II superconductors. (Refer Q.1 and Q.25 of Chapter 9) [7]

- b) Explain the origin of magnetic properties of materials. Derive an expression of Bohr magneton. (Refer Q.1 and Q.2, of Chapter 8) [7]

- c) Describe the construction and working of SQUID. (Refer Q.29 of Chapter 9) [4]

OR

Q.6 a) Classify magnetic materials on the basis of their permeability. (Refer Q.3, Q.4 and Q.5 of Chapter 8) [7]

- b) What are Cooper pairs ? Explain BCS theory of superconductivity. (Refer Q.19 of Chapter 9) [7]

- c) Superconducting tin (Sn) has a critical temperature of 3.7 K at zero magnetic field and a critical field of 0.0306 tesla at 0 K. Find the critical field at 2 K. (Refer Q.15 of Chapter 9) [4]

Q.7 a) Describe the ultrasonic testing method of flaw detection. List the limitations of the method. (Refer Q.7 of Chapter 10) [7]

- b) Compare destructive and non-destructive testing. Mention the various NDT methods. (Refer Q.1 and Q.4 of Chapter 10) [6]

- c) Explain the effect of surface to volume ratio on properties of nanoparticles. (Refer Q.3 of Chapter 11) [4]

OR

- Q.8** a) *Explain electrical properties of nanoparticles.*
(Refer Q.4 of Chapter 11) [7]
- b) *Explain the use of nanoparticles in the field of medicine and in space applications. (Refer Q.11 of Chapter 11)* [6]
- c) *State the objectives of non-destructive testing (NDT).*
(Refer Q.3 of Chapter 10) [4]

END... ✍

Time : $2\frac{1}{2}$ Hours]

[Maximum Marks : 70

Instructions to the candidates :

- (1) Solve any one question out of Q.1 or Q.2, Q.3 or Q.4, Q.5 or Q.6, Q.7 or Q.8.
- (2) Figure to the right indicate full marks.
- (3) Neat diagrams must be drawn wherever necessary.
- (4) Use of electronic calculator is allowed.
- (4) Assume suitable data, if necessary.

- Q.1** a) *Derive Schrodinger's time independent wave equation.*
(Refer Q.52 of Chapter - 6) [6]
- b) *State the de Broglie hypothesis and explain any three properties of matter waves.*
(Refer Q.1 and Q.32 of Chapter - 6) [4]
- c) *Explain tunneling effect. Explain in brief how this is used in scanning tunneling microscope.*
(Refer Q.69 and Q.71 of Chapter - 6) [4]
- d) *Lowest energy of an electron trapped in potential well is 38 eV. Calculate the width of well in A.V.*
[Given : Mass of electron 9.1×10^{-31} kg, plank constant 6.63×10^{-34} J-s, charge on e^- 1.6×10^{-19} C].
(Refer Q.60 of Chapter - 6) [4]

OR

- Q.2** a) *What is Schrodinger's equation ? Derive Schrodinger's time dependent equation.* (Refer Q.54 of Chapter - 6) [6]

- b) State and explain Heisenberg's uncertainty principle.
(Refer Q.35 of Chapter - 6) [4]
- c) What is wave function ψ ? Explain physical significance of $|\psi|^2$. (Refer Q.45 and Q.46 of Chapter - 6) [4]
- d) If uncertainty in position of a particle is equal to its de Broglie wavelength, show that uncertainty in velocity is equal to the velocity of the particle. Consider the product of uncertainties as h . (Refer Q.42 of Chapter - 6) [4]

Q.3 a) Using Fermi Dirac probability distribution function, derive an expression for the position of Fermi energy level in the intrinsic semiconductor. [6]

Ans. : • The Fermi-Dirac probability distribution function, which gives the probability that an electron has energy 'E' is,

$$P(E) = \frac{1}{1 + e^{(E-E_F)/kT}} \quad \dots (1)$$

- The widths of valence band and conduction band are assumed to be very small compared to the forbidden energy gap E_g .
- As the widths of the valence and conduction bands are very small, they are represented by single values of energy E_v and E_c respectively. Then the probability that an electron is in valence band is the probability that it has energy E_v and is represented by $P(E_v)$ which is given by,

$$P(E_v) = \frac{1}{1 + e^{(E_v-E_F)/kT}} \quad \dots (2)$$

- Similarly the probability that the electron is in the conduction band is,

$$P(E_c) = \frac{1}{1 + e^{(E_c-E_F)/kT}} \quad \dots (3)$$

- If at any temperature 'T'

n_c = Number of electrons in conduction band

n_v = Number of holes in valence band

N = Total number of electrons in valence and conduction bands

$$N = n_v + n_c$$

$$\therefore \frac{n_v}{N} + \frac{n_c}{N} = 1$$

As $P(E_c) = \frac{n_c}{N}$

and $P(E_v) = \frac{n_v}{N}$

$$P(E_v) + P(E_c) = 1$$

- Substituting from equations (2) and (3)

$$\frac{1}{1 + e^{(E_v - E_F)/kT}} + \frac{1}{1 + e^{(E_c - E_F)/kT}} = 1$$

$$1 + e^{(E_c - E_F)/kT} + 1 + e^{(E_v - E_F)/kT} = [1 + e^{(E_v - E_F)/kT}] [1 + e^{(E_c - E_F)/kT}]$$

$$\therefore 2 + e^{(E_c - E_F)/kT} + e^{(E_v - E_F)/kT} = 1 + e^{(E_v - E_F)/kT} + e^{(E_c - E_F)/kT} + e^{(E_v + E_c - 2E_F)/kT}$$

$$\therefore 1 = e^{(E_v + E_c - 2E_F)/kT}$$

$$\frac{E_v + E_c - 2E_F}{kT} = 0$$

$$\therefore E_v + E_c - 2E_F = 0$$

$$\therefore E_F = \frac{E_v + E_c}{2}$$

- Thus the Fermi level lies exactly at the centre of the forbidden gap as shown in Fig. 1.



Fig. 1

b) Derive the ideal diode equation for a P-N junction. [4]

Ans. : • Current in a semiconductor can be caused by either conduction or diffusion.

- Conduction current is caused by presence of an electric field.
- Diffusion current is caused by concentration gradient of charge carriers.
- The diffusion hole current in the n -side is given by

$$I_{pn}(x) = -AeD_p \frac{dp_n}{dx} \quad \dots(1)$$

where, D_p is the diffusion constant for holes, e is the charge of an electron and $\frac{dp_n}{dx}$ is the concentration gradient of holes in the n -side.

- The ratio of diffusion constant to mobility is constant at a particular temperature and is given by,

$$\frac{D_p}{\mu_p} = \frac{D_n}{\mu_n} = V_T$$

where V_T is known as the volt equivalent of temperature. It is given by

$$V_T = \frac{kT}{e} = \frac{T}{11600}$$

The concentration of holes in the n -side is given by

$$p_n(x) = p_{no} + P_n(0)e^{-\frac{x}{L_p}} \quad \dots(2)$$

where p_{no} is the thermal equilibrium value of concentration of holes in the n -side, L_p is the diffusion length for holes and $P_n(0)$ is the injected concentration of holes at $x = 0$.

$P_n(0)$ is obtained by substituting $x = 0$ in equation (2).

$$P_n(0) = p_n(0) - p_{no} \quad \dots(3)$$

Differentiating equation (2) w.r.t x ,

$$\frac{dp_n}{dx} = -\frac{P_n(0)}{L_p} e^{-\frac{x}{L_p}}$$

Substituting in equation (1),

$$I_{pn}(x) = \frac{AeD_p P_n(0)}{L_p} e^{-\frac{x}{L_p}} \quad \dots(4)$$

The relation between hole concentration p_p at the edge of depletion region on the p -side, concentration p_n at the edge of depletion region on the n -side and the barrier potential V_B is obtained from kinetic theory of gases as

$$p_p = p_n e^{\frac{V_B}{V_T}} \quad \dots(5)$$

In an open circuited diode $p_p = p_{po}$, $p_n = p_{no}$ and $V_B = V_o$. Hence,

$$p_{po} = p_{no} e^{\frac{V_o}{V_T}}$$

$$p_{po} = p_{no} e^{\frac{V_o}{V_T}} \quad \dots(6)$$

If a forward biased voltage V is applied, the barrier potential reduces to $V_o - V$. The hole concentration in the p -side remains constant and equal to the equilibrium value p_{po} but varies with distance x from the edge of depletion region inside the n -side.

If $p_n = p_n(0)$ at $x = 0$,

$$p_{po} = p_n(0) e^{\frac{V_o - V}{V_T}}$$

$$\therefore p_{po} = p_n(0) e^{\frac{V_o}{V_T}} e^{-\frac{V}{V_T}}$$

$$\therefore p_{po} e^{-\frac{V_o}{V_T}} e^{\frac{V}{V_T}} = p_n(0)$$

Substituting from equation (6),

$$p_n(0) = p_{no} e^{\frac{V}{V_T}} \quad \dots(7)$$

Substituting in equation (3),

$$P_n(0) = p_{no} \left(e^{\frac{V}{V_T}} - 1 \right)$$

The hole current crossing the junction into the n -side is obtained from equation (4) as

$$I_{pn}(0) = \frac{AeD_p P_n(0)}{L_p} = \frac{AeD_p p_{no}}{L_p} \left(e^{\frac{V}{V_T}} - 1 \right)$$

Similarly, the electron current crossing the junction into the p -side will be

$$I_{np}(0) = \frac{AeD_n n_{po}}{L_p} \left(e^{\frac{V}{V_T}} - 1 \right)$$

The total diode current is

$$I = I_{pn}(0) + I_{np}(0) = \left(\frac{AeD_p p_{no}}{L_p} + \frac{AeD_n n_{po}}{L_p} \right) \left(e^{\frac{V}{V_T}} - 1 \right)$$

$$\therefore I = I_0 \left(e^{\frac{V}{V_T}} - 1 \right)$$

If charge generation and recombination in the depletion region is considered, the above equation becomes

$$I = I_0 \left(e^{\frac{V}{\eta V_T}} - 1 \right)$$

where, $\eta = 1$ for germanium diodes and 2 for silicon diodes.

c) Calculate the mobility of charge carriers in doped silicon whose conductivity is 100 per Ωm and the Hall coefficient is $3.6 \times 10^{-4} \text{ m}^3/c$. (Refer Q.44 of Chapter - 7) [4]

d) What is photovoltaic effect ? Draw $I - V$ characteristics of solar cell and define fill factor.

(Refer Q.37 of Chapter - 7)

[3]

OR

Q.4 a) Explain Hall effect with figure. Derive the equation of Hall voltage and Hall coefficient. (Refer Q.39 of Chapter - 7) [6]

b) State any four measures to improve efficiency of solar cell. [4]

Ans. : Efficiency of solar cells can be increased by following methods :

1. Antireflection coatings are deposited on the top surface of the cells to reduce reflection. This makes more light incident on the depletion region of the cell increasing its efficiency.
2. A solar cell absorbs only a limited range of wavelengths from the light incident on it depending upon the material used. To absorb larger part of the incident spectrum, multi-junction cells are used which increase the efficiency.
3. The upper layer is made as thin as possible so that more light penetrates into the depletion region where the generated electron-hole pairs get separated. Electron hole pairs which get generated away from depletion region do not get separated and hence do not contribute to the photovoltage produced.
4. Solar cell materials are chosen so that the junction has larger barrier potential. This increases the voltage produced by a single cell.

c) Calculate the conductivity of pure silicon at room temperature when concentration of carriers is 1.6×10^{10} per CC. [Given $\mu_e = 1500 \text{ cm}^2/\text{V-sec}$, $\mu_h = 500 \text{ cm}^2/\text{V.sec}$, charge on electron $1.6 \times 10^{-19} \text{ C}$].
(Refer Q.21 of Chapter - 7) [4]

d) Explain in brief concept of effective mass of electron.
(Refer Q.9 of Chapter - 7) [3]

Q.5 a) Define superconductivity with resistance Vs temperature graph and example. Explain zero electrical resistance in super conductivity. (Refer Q.1 and Q.2 of Chapter - 9) [6]

b) Explain DC and AC Josephson effect with diagram.
(Refer Q.29 of Chapter - 9) [4]

- c) Distinguish between diamagnetism, paramagnetism and ferromagnetism (two points each).

(Refer Q.3, Q.4 and Q.5 of Chapter - 8) [4]

- d) Define with unit : i) Magnetic field strength (H)
ii) Magnetization (M). [4]

Ans. : i) Magnetic field strength (H) :

The magnetic field strength or magnetic field intensity at any point in a field is the force experienced by a unit north pole at that point. The unit of H is A/m.

ii) Magnetization (M) : It is the magnetic moment per unit volume. The unit of M is A/m.

OR

- Q.6 a)** Explain how information is recorded and retrieved in magneto-optical recording devices. [6]

Ans. : Information Recording :

- The magneto-optic drives use a combination of a laser and an electromagnet to record data.
- The laser heats the magnetic medium to a temperature above its Curie temperature so that it loses its magnetic properties. The microscopic magnetic dipoles become randomly oriented.
- The electromagnet positioned on the opposite side of the laser now orients the magnetic moments to record a '0' or a '1' along the length of the medium which is in continuous motion.
- As the temperature cools below Curie temperature, the recorded data remains etched on the magnetic material in the form of orientation of magnetic dipole moments.

Information Retrieval :

- The information retrieval process is based on the Magneto-Optical Kerr effect.

- When polarized light is made incident on a magnetized medium, the intensity of reflected light varies with the orientation of magnetic moments on the surface of the medium. This effect is known as **Magneto-Optical Kerr effect**.
- A low power polarized laser beam is used to illuminate the magnetized medium on which the data is recorded.
- The reflected light intensity is different for the two different magnetic moment orientations corresponding to '0' and '1'.
- Thus the reflected light intensity contains information regarding the recorded data.

b) Explain in brief : i) Absolute permeability ii) Relative permeability. [4]

Ans. : i) Magnetic permeability (μ) :

- It is defined as the ratio of magnetic flux density (B) to the magnetic field strength (H).

$$\mu = \frac{B}{H}$$

$$\therefore B = \mu H$$

- The permeability of free space (μ_0) is a constant and has a value of

$$\mu_0 = 4\pi \times 10^{-7} \text{ H/m}$$

ii) Relative permeability : The relative permeability (μ_r) of any medium is defined as the ratio of permeability of medium (μ) to the permeability of free space (μ_0).

$$\therefore \mu_r = \frac{\mu}{\mu_0}$$

$$\therefore \mu = \mu_0 \mu_r$$

c) What are SQUID ? Explain any two applications of SQUID. [4]

Ans. : The SQUID consists of two Josephson junctions J_A and J_B as shown in Fig. 2. A current I_{in} entering the ring is divided into two parts I_A and I_B as shown in Fig. 2. If an external magnetic

field is applied, it modifies the phase of the two currents I_A and I_B which in turn modifies the output current I_{out} .

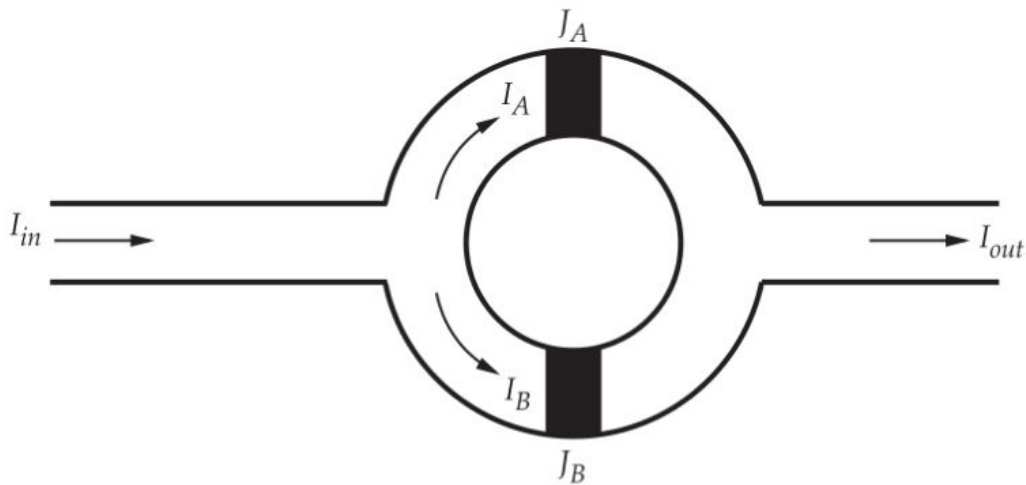


Fig. 2

The output current varies periodically with the applied magnetic flux. Thus, if a magnetic field is applied to a SQUID, its output current changes. This change in current is used to find the magnetic flux.

SQUIDS are capable of detecting very small magnetic fields of the order of 10^{-14} T and hence are used as diagnostic tools in detecting brain signals.

- d)** *The transition temperature of lead is 7.2 K. However, at 5K it loses the superconducting property if subjected to magnetic field of 3.3×10^4 A/m. Find the maximum value of H which will allow the metal to retain its super conductivity at 0 K.*

(Refer Q.18 of Chapter - 9)

[4]

- Q.7 a)** *What is non-destructive testing ? State types of non-destructive techniques. Explain ultrasonic testing technique for flaw detection.*

(Refer Q.1, Q.4 and Q.7 of Chapter - 10)

[6]

- b)** *An ultrasonic pulse is sent through a block of copper. The echo pulse is received after $4 \mu\text{s}$. If velocity of ultrasonic in copper is 5000 m/s, calculate the thickness of copper block. If the reflection of pulse is recorded after $1.253 \mu\text{s}$ from the top, what is the location of flaw ?*

[4]

Ans. : Given data : $t = 4 \mu\text{s} = 4 \times 10^{-6} \text{ s}$,

$v = 5000 \text{ m/s}$ for copper block, $t = 1.253 \mu\text{s} = 1.253 \times 10^{-6} \text{ s}$,

$v = 5000 \text{ m/s}$ for flaw

Formula : $d = \frac{vt}{2}$

Thickness of copper block $d = \frac{5000 \times 4 \times 10^{-6}}{2} = 10^{-2} \text{ m}$

$\therefore$

$$d = 1 \text{ cm}$$

Position of flaw $x = \frac{5000 \times 1.253 \times 10^{-6}}{2} = 3.1325 \times 10^{-3} \text{ m}$

$\therefore$

$$x = 3.1325 \text{ mm}$$

c) *What is nanotechnology ? Explain applications of nanotechnology in electronic field.*

(Refer Q.1 and Q.11 of Chapter - 11)

[4]

d) *What is quantum confinement ? How does it affect the properties of nano particles ?*

(Refer Q.2 of Chapter - 11)

[3]

OR

Q.8 a) *Explain electrical and mechanical properties of nano-particles.*

(Refer Q.4 of Chapter - 11)

[6]

b) *Explain how nanotechnology is employed in targeted drug delivery.*

[4]

Ans. : • Targeted drug delivery system is a method to deliver medicine only to the diseased tissue without affecting the healthy tissues.

- Targeted drug delivery system makes use of nanoparticles as carriers to deliver drugs to specific organs or tissues of the body.
- Some nanoparticles are activated by changes in pH or by changes in redox potential. This is utilized to target the diseased tissues like tumours.

- As soon as the nanoparticles loaded with drugs encounter a change in pH or redox potential, they release the drugs. Thus the drugs are released only in the vicinity of the diseased tissue.
- In some cases, it is required that the drug be released at a slow rate for a prolonged time. In such cases, the nanoparticle is coated with a substance like polyethylene glycol.
- As a result, the drug carrying nanoparticle remains in circulation inside the body for a long time and keeps releasing the drug.
- Drug delivery system based on nanoparticles reduces damage to healthy tissue and hence the side effects are less. It also reduces the dosage as the drug reaches only the affected tissue.

c) *An ultrasonic pulse of frequency 130 kHz is sent through a block of steel. The echo pulse is received after 1.695 μ s. If velocity of ultrasonic in steel is 5900 m/s, calculate the thickness of the steel block and wavelength of the pulse. [4]*

Ans. : Given data : $f = 130 \text{ kHz}$, $v = 5900 \text{ m/s}$,
 $t = 1.695 \mu\text{s} = 1.695 \times 10^{-6} \text{ s}$

Formula : $d = \frac{vt}{2}$; $\lambda = \frac{v}{f}$

Thickness of steel block $d = \frac{5900 \times 1.695 \times 10^{-6}}{2} = 5 \times 10^{-3} \text{ m}$

$\therefore$

$$d = 5 \text{ mm}$$

$$\lambda = \frac{5900}{130 \times 10^3} = 4.54 \times 10^{-3} \text{ m}$$

$\therefore$

$$\lambda = 4.54 \text{ mm}$$

d) *Explain in brief how acoustic emission technique is used in non-destructive testing. (Refer Q.5 of Chapter - 10) [3]*

END... ✍